


Wouss

Lighting Emotion



MICRO & MICROTWIN

The versatile mini LED spotlights



MICRO & MICROTWIN

Gamme	Luminaires for accent lighting						
Description	Micro : 1 individual adjustable LED spotlight to be fixed thanks to a threaded rod, a metal plate or a magnet , according to version MicroTwin : 2 to 8 x adjustable LED spotlights, fixed on a U profile, with a quick connector on the back or on the front part of the profile, according to selected solution Orientation : 120° – Adjustable tilt : 105°						
Finish	Black anodized matt finish						
Dimensions Micro (Fixing device included)	Micro			Micro Low Luminance			
	Threaded rod	On Plate	Magnetic	Threaded rod	On Plate	Magnetic	
	Diameter : 12.6mm	Diameter : 12.6mm	Diameter : 12.6mm	Diameter : 12.6mm	Diameter : 12.6mm	Diameter : 12.6mm	
	Length : 31mm	Length : 38.5mm	Length : 31.4mm	Length : 37.2mm	Length : 44.7mm	Length : 37.6mm	
	Height : 41.6mm max	Height : 44.6mm max	Height : 46.6mm max	Height : 47.8mm max	Height : 50.8mm max	Height : 52.8mm max	
Dimensions MicroTwin	Diamter : 12.60mm Length : 33.40mm - 39.60mm (Low Luminance) Track height : 15mm Track width : 20mm Total height : 46mm						
	U profile length						
	2 spots 117mm	3 spots 156mm	4 spots 195mm	5 spots 234mm	6 spots 273mm	7 spots 312mm	8 spots 351mm
LED characteristics	2200K - 2700K – 3000K – 3500K - 4000K (other upon request) Or 2 colour temperatures in alternation (MicroTwin) CRI 90 - 95 R9>80						
Accessories	Filters upon request						
Optical beams	14°- 17°- 25°- 30°- 35°- 40°- 60°- Elliptical (other upon request)						
Connection	Micro			MicroTwin			
	Supplied with 0.5m cable (other length upon request) Individual or series connection to remote constant current driver			U profile equipped with a male quick connector Delivered with 2 x 1m extension cable + female quick connector To be connected on 1 or 2 constant current drivers (1 per colour temperature/channel)			
	For the US & Canada, use remote UL class 2 constant current driver						

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged




MICRO & MICROTWIN

Separate power supply	700mA max remote constant current driver Dimmable driver upon request (1-10V – Dali) For the US & Canada, use remote UL class 2 constant current driver								
LED power (per channel at 700mA max)		Number of LED spots							
	Number of channel(s)	1	2	3	4	5	6	7	8
	1 Channel	2.70W	4.90W	7.00W	9.10W	11.20W	14.00W	15.40W	18.20W
	2 Channels		2.80W	2.80W max	4.90W	7.00W max	7.00W	7.00W max	9.10W
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta 25°) may lead to a more rapid mortality of the product and the withdrawal of our guarantees This luminaire is a class III device and must be powered up by a SELV (Safety Extra Low Voltage) control gear delivering a constant current and compliant with the IEC 61347-2-13 standard The drivers must be approved by LOuss before use Indoor lighting For cabinet use only IP rating: 20 Electrical safety rating: III Dry locations only								
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in								

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged



Threaded Rod

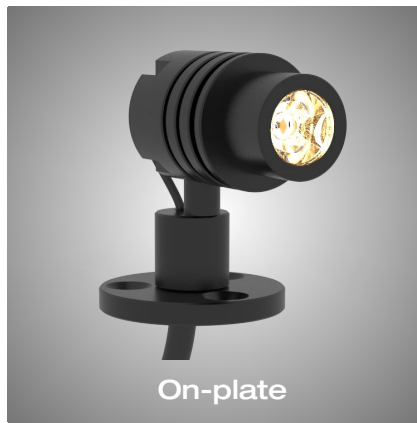


On-plate




Magnetic



MICRO – toutes versions

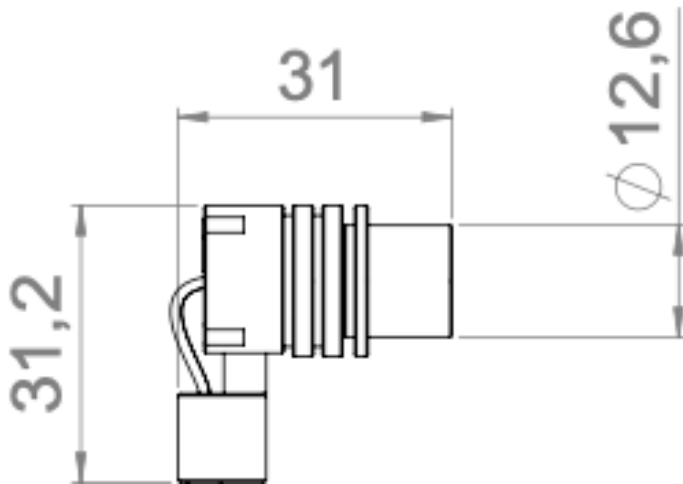

Simple version

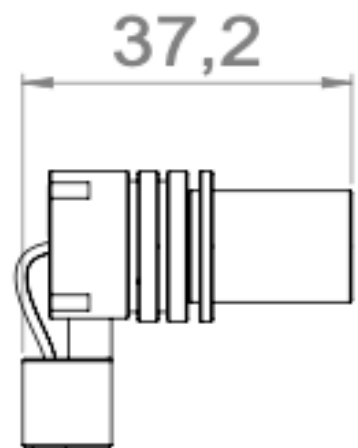

Low Luminance version

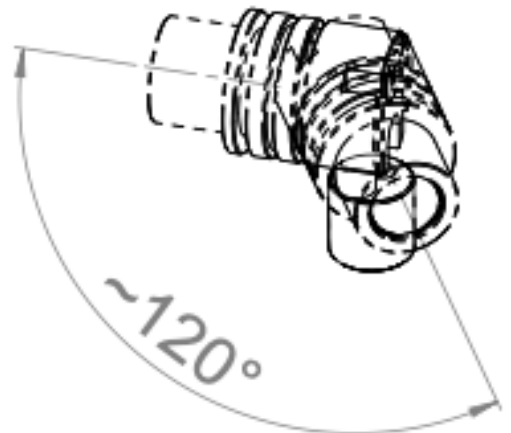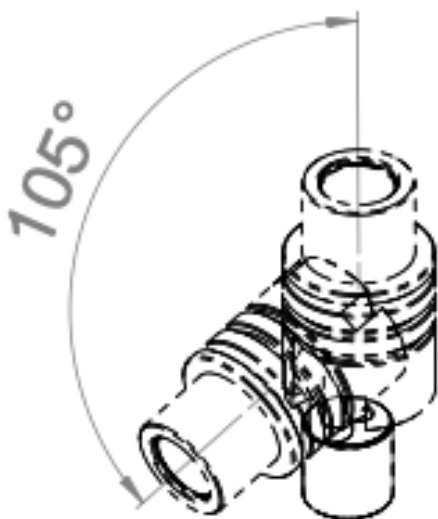

Beyond 120°, wires may cause an inconvenience

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Louss

Last update : 2025.07.07

4/15

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group



Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





MICRO THREADED ROD

Dimensions & Installation guide

Cable below the spotlight

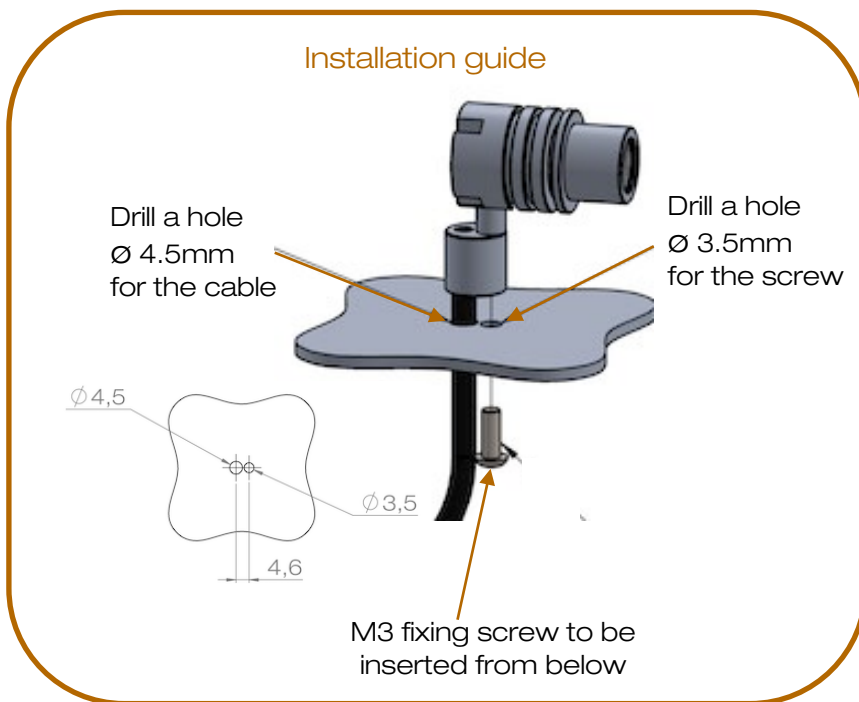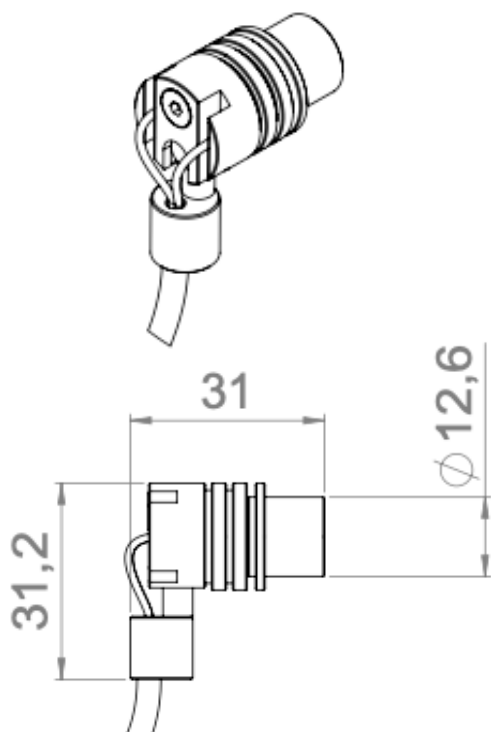

Cable behind the spotlight

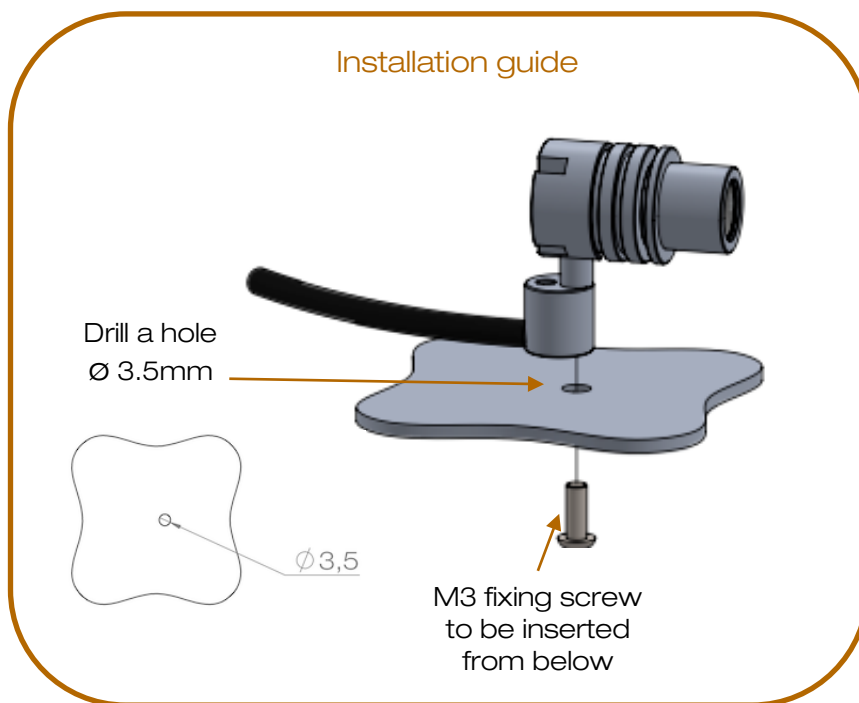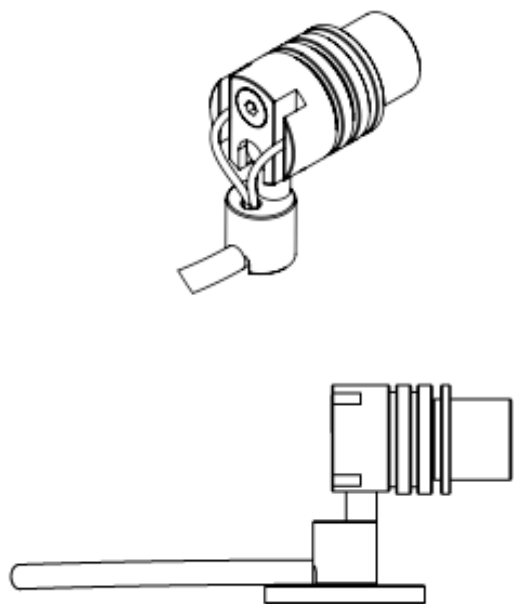

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

LOUSS

Last update : 2025.07.07


5/15
Firalux & LOUSS brands



MICRO THREADED ROD


Dimensions & Installation guide

Cable below the spotlight

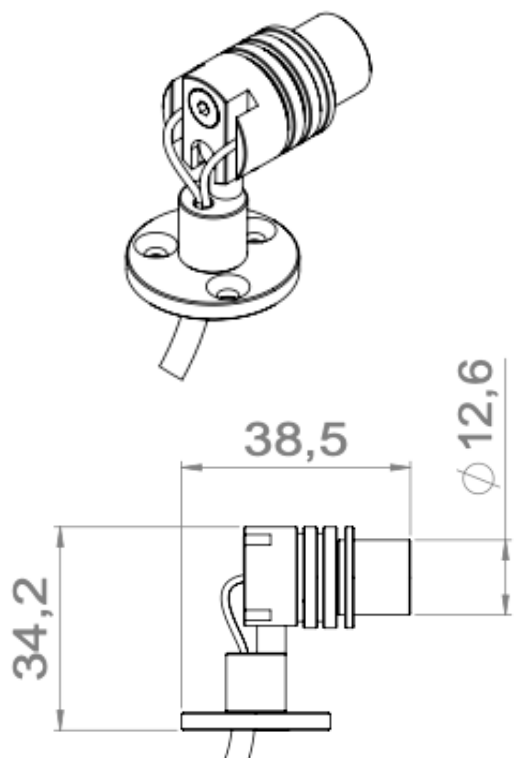

Installation guide

Drill a hole
Ø 4.5mm
for the cable

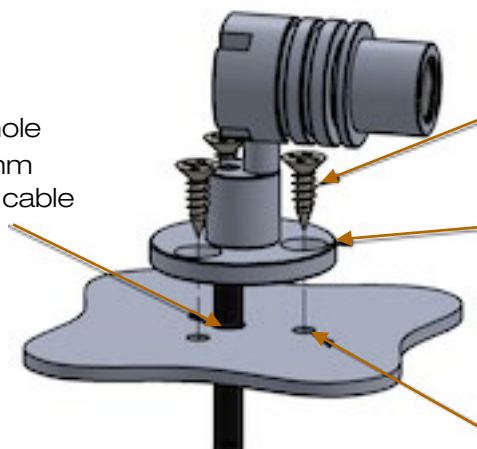


Use 3
countersunk
screws
according to
material


3 holes
Ø 3.2mm

Drill 3 holes
according to
the diameter
& kind of
screws

Cable behind the spotlight

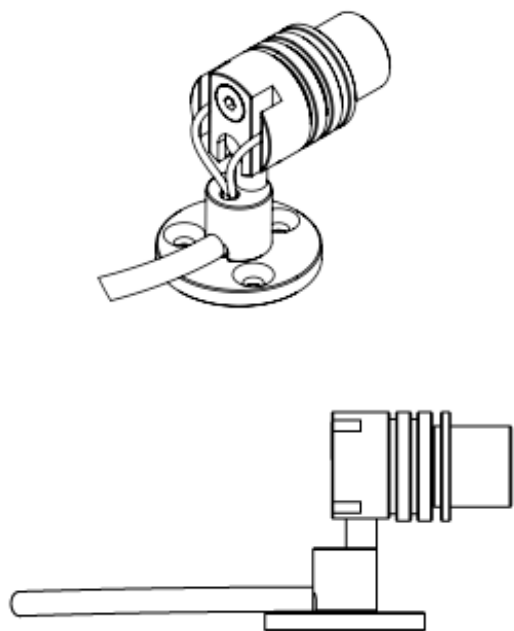

Installation guide

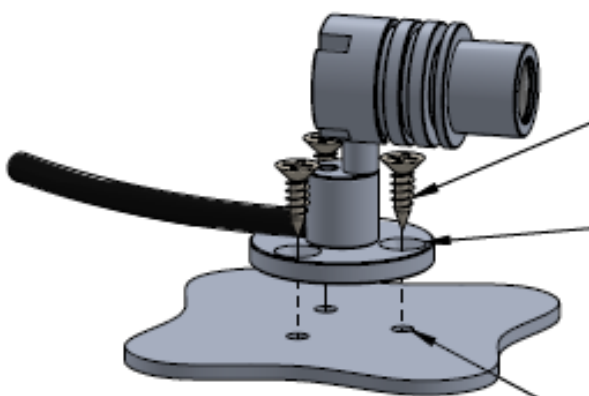

Use 3
countersunk
screws
according to
material

3 holes
Ø 3.2mm

Drill 3 holes
according to the
diameter & kind
of screws used

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Last update : 2025.07.07

Louss

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


6/15
Firalux & LOuss brands
Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



MICRO MAGNETIC

Dimensions & Installation guide

Cable behind the spotlight

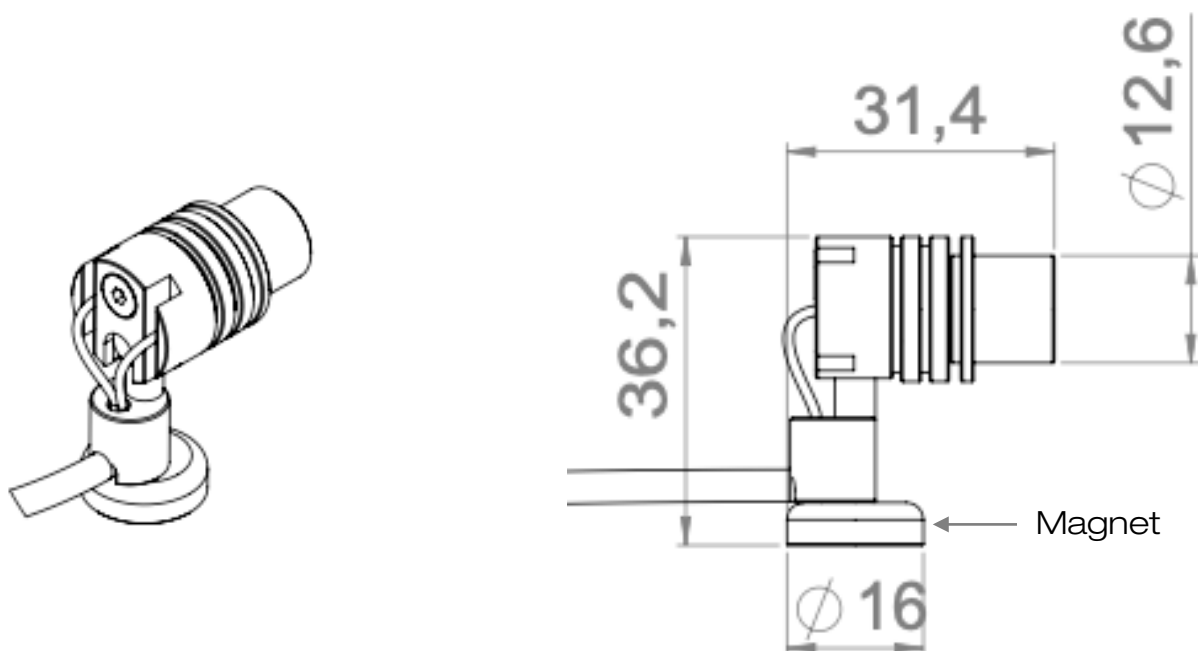

Installation guide




Install the spotlight on a metallic surface

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.


LOUSS

Last update : 2025.07.07



7/15
Firalux & LOUSS brands

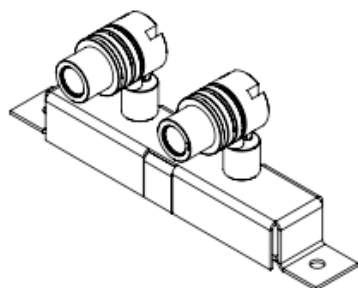


Simple




Low luminance

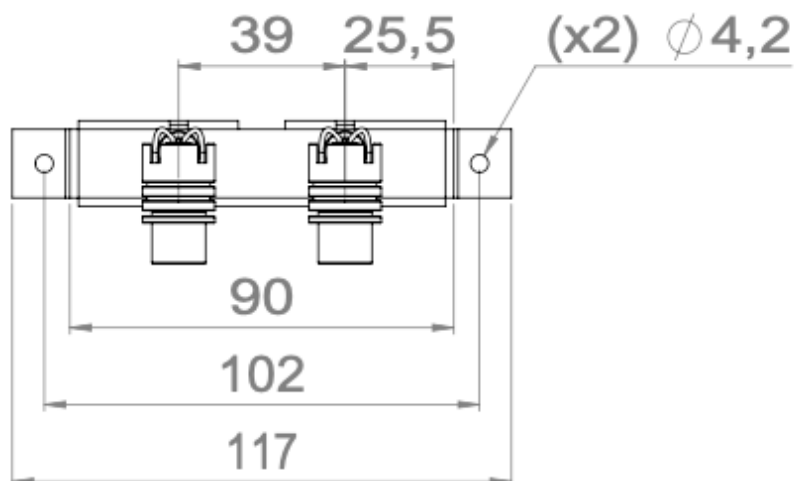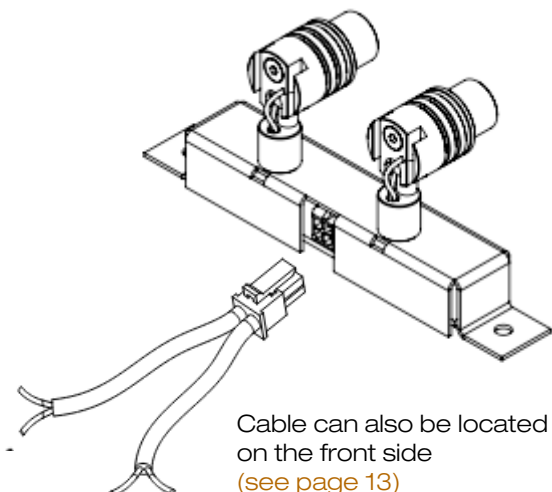



MicroTwin3 - 3 spotlights

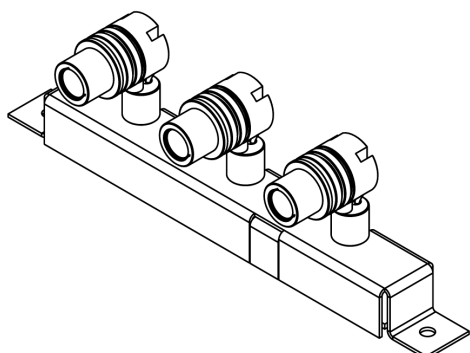


Simple

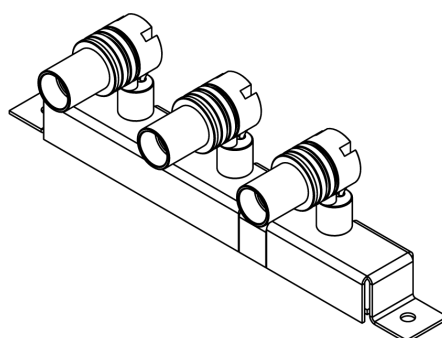


Low luminance

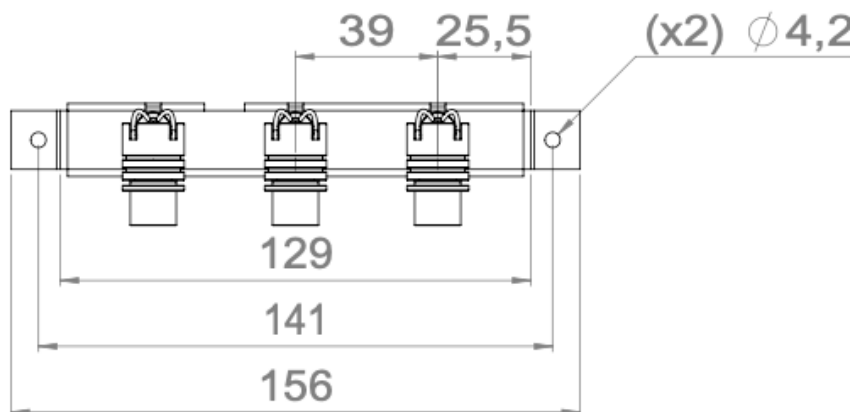
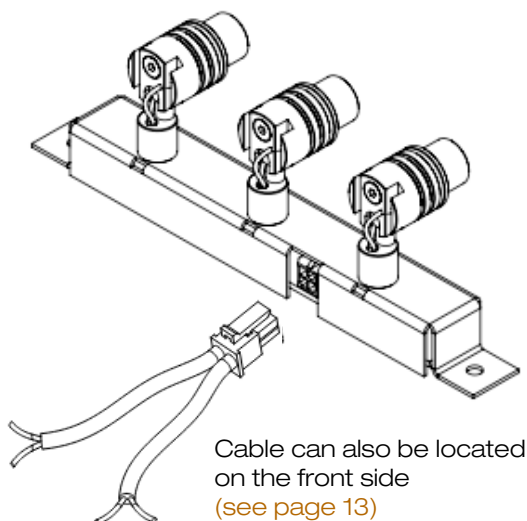


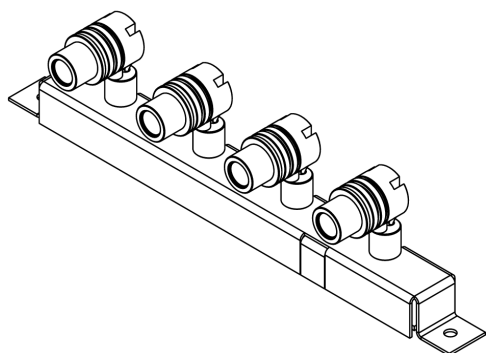


Simple

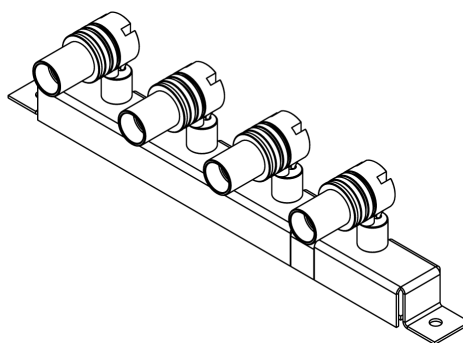


Low luminance

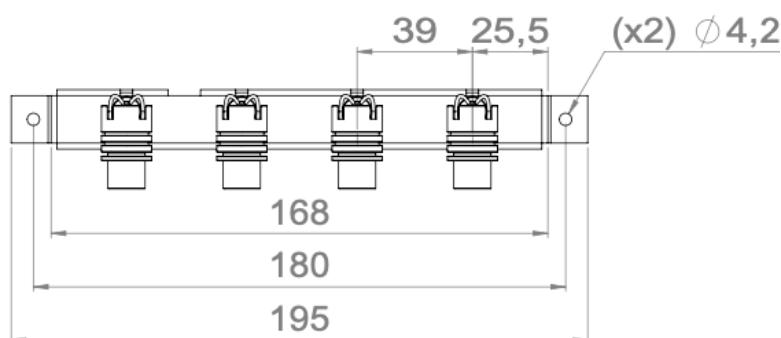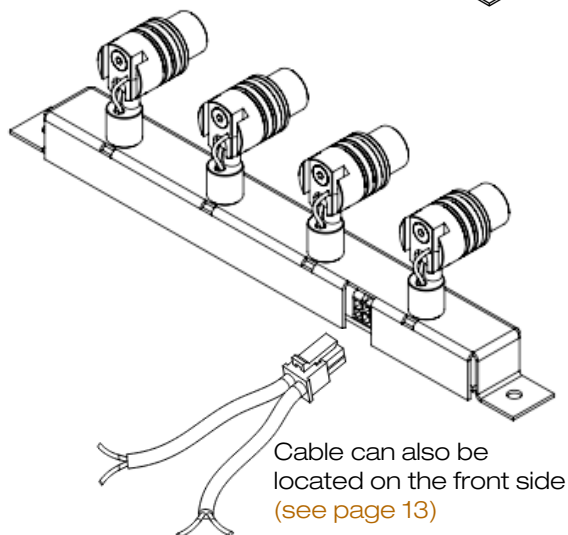



MicroTwin5 – 5 spotlights

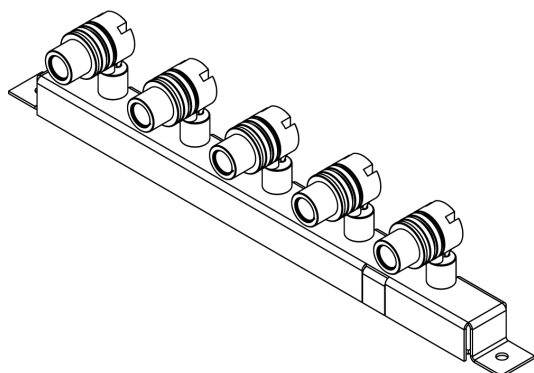


Simple

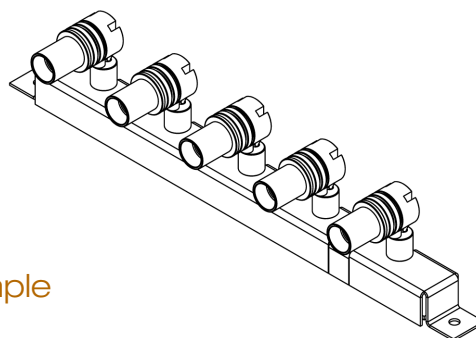


Low luminance

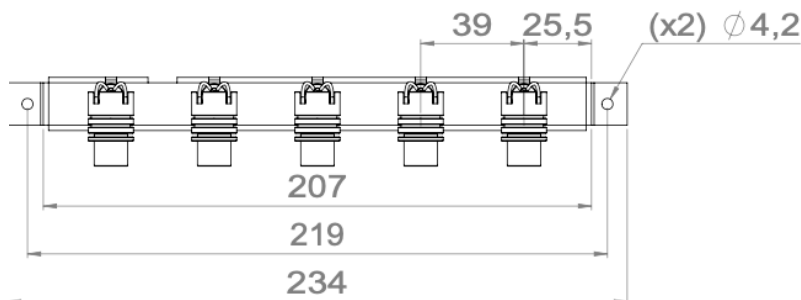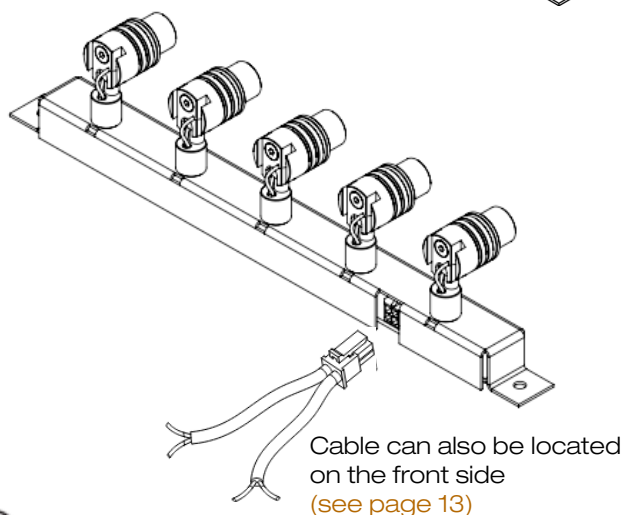


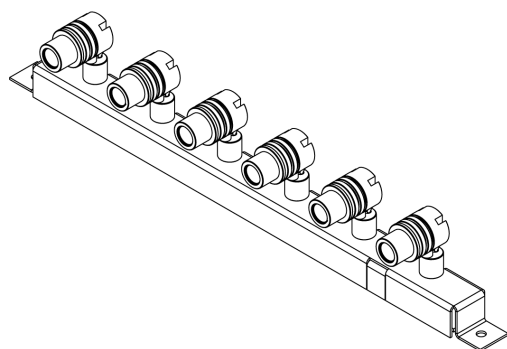


Simple

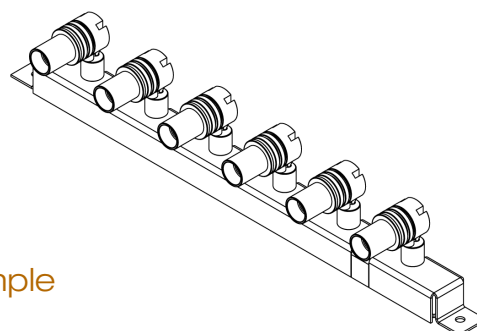


Low luminance

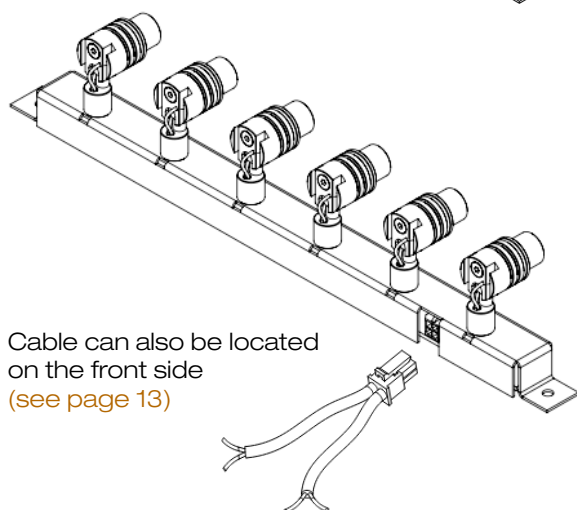


Cable can also be located
on the front side
(see page 13)

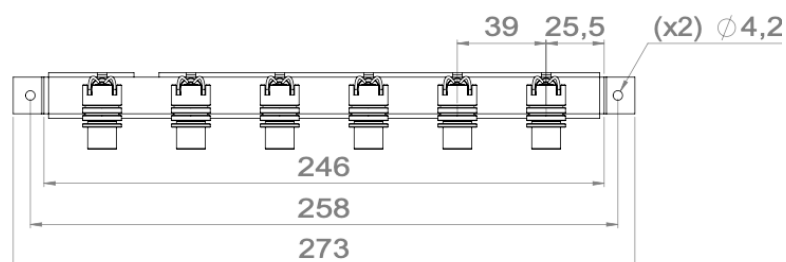


MicroTwin7 – 7 spotlights

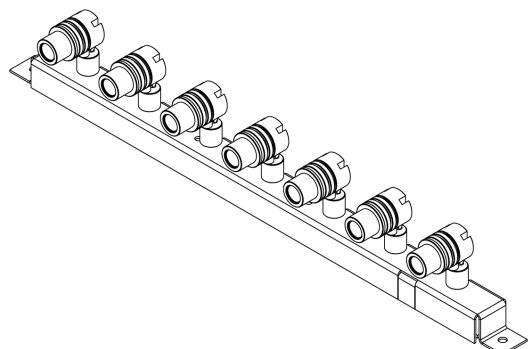


Simple

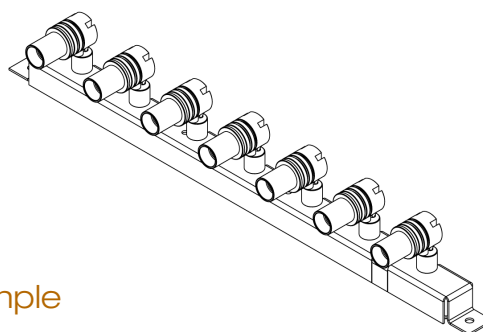


Low luminance

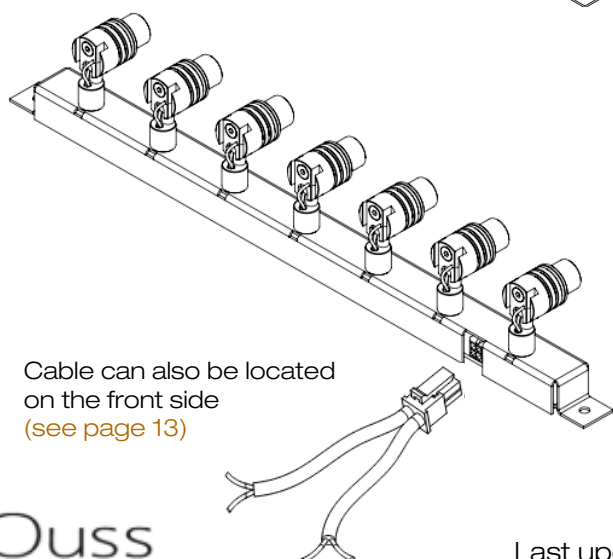


Cable can also be located
on the front side
(see page 13)

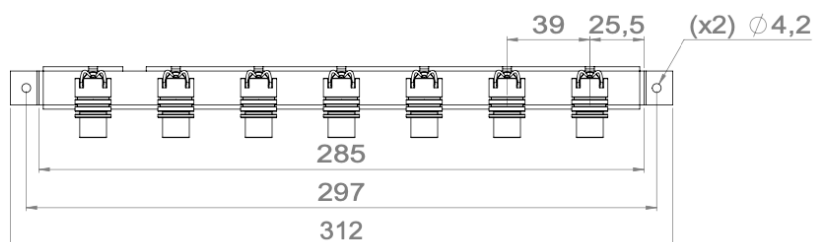


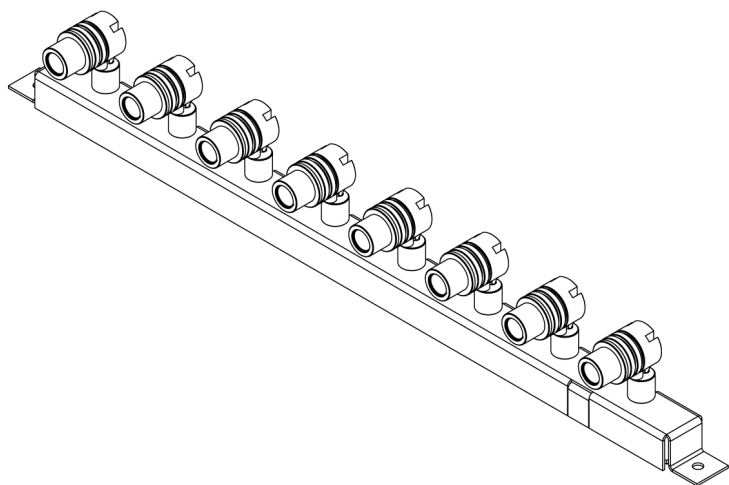


Simple

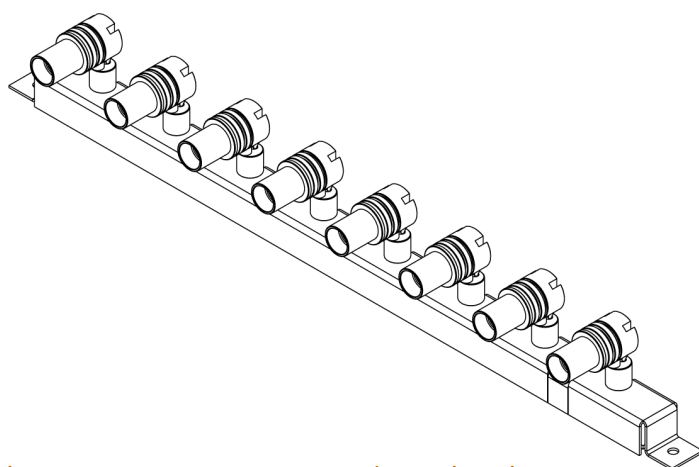


Low luminance

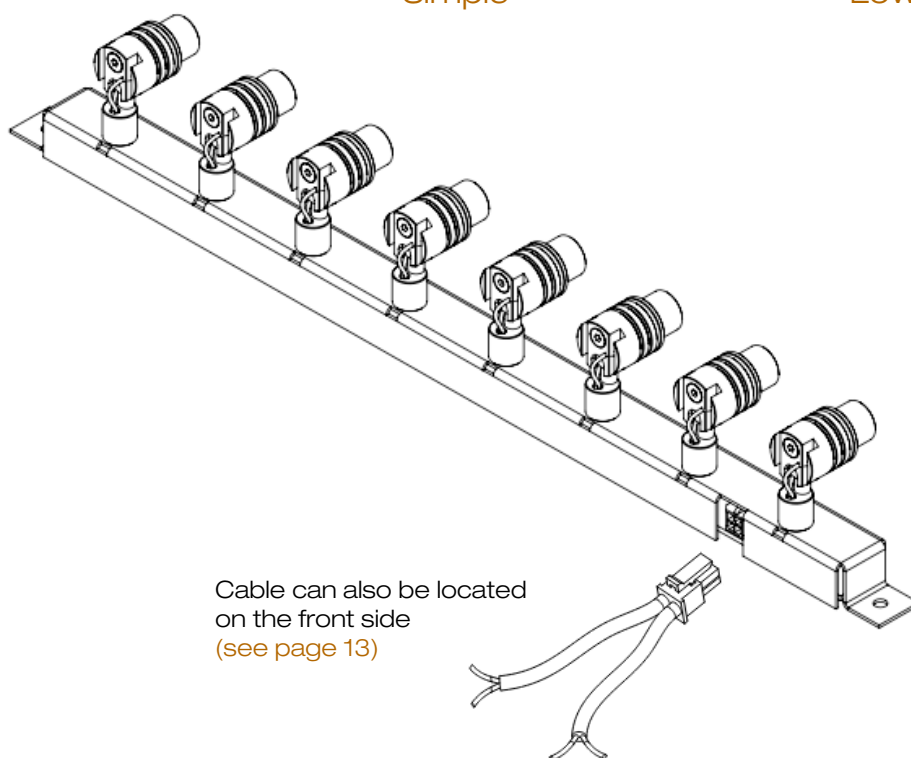


Cable can also be located on the front side
(see page 13)

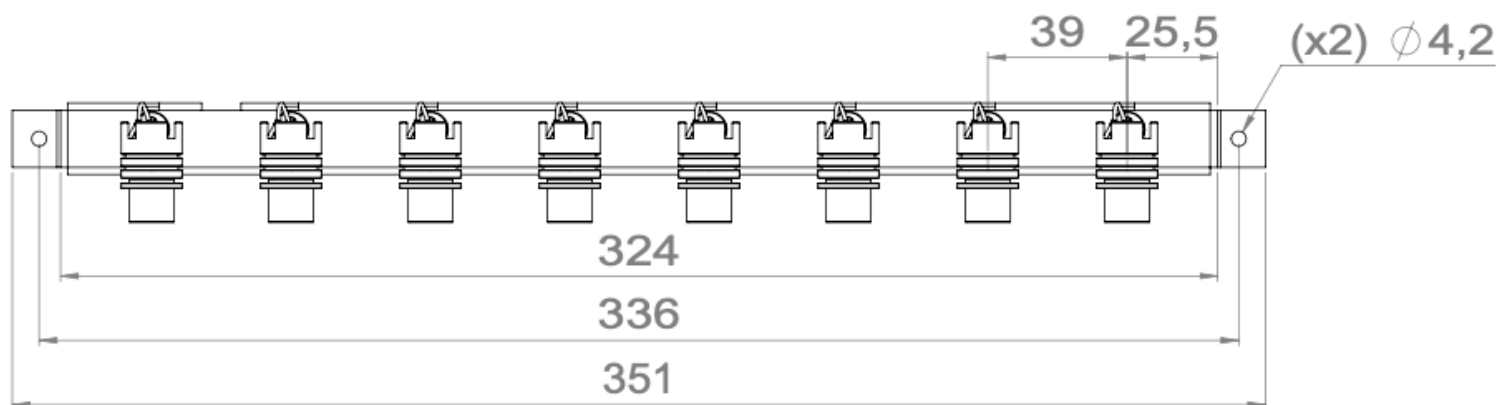


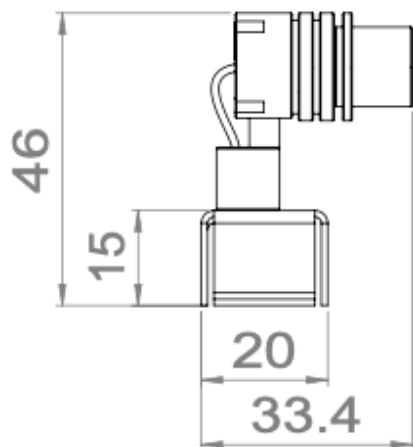

Details of the spotlight
Simple

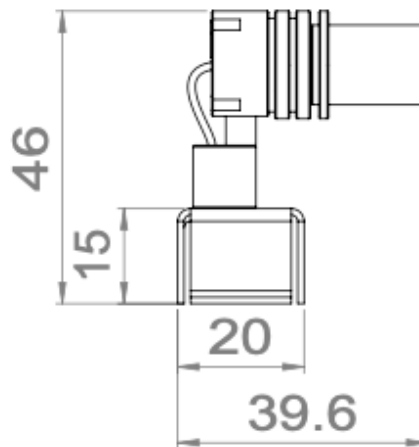


Details of the spotlight
Low Luminance

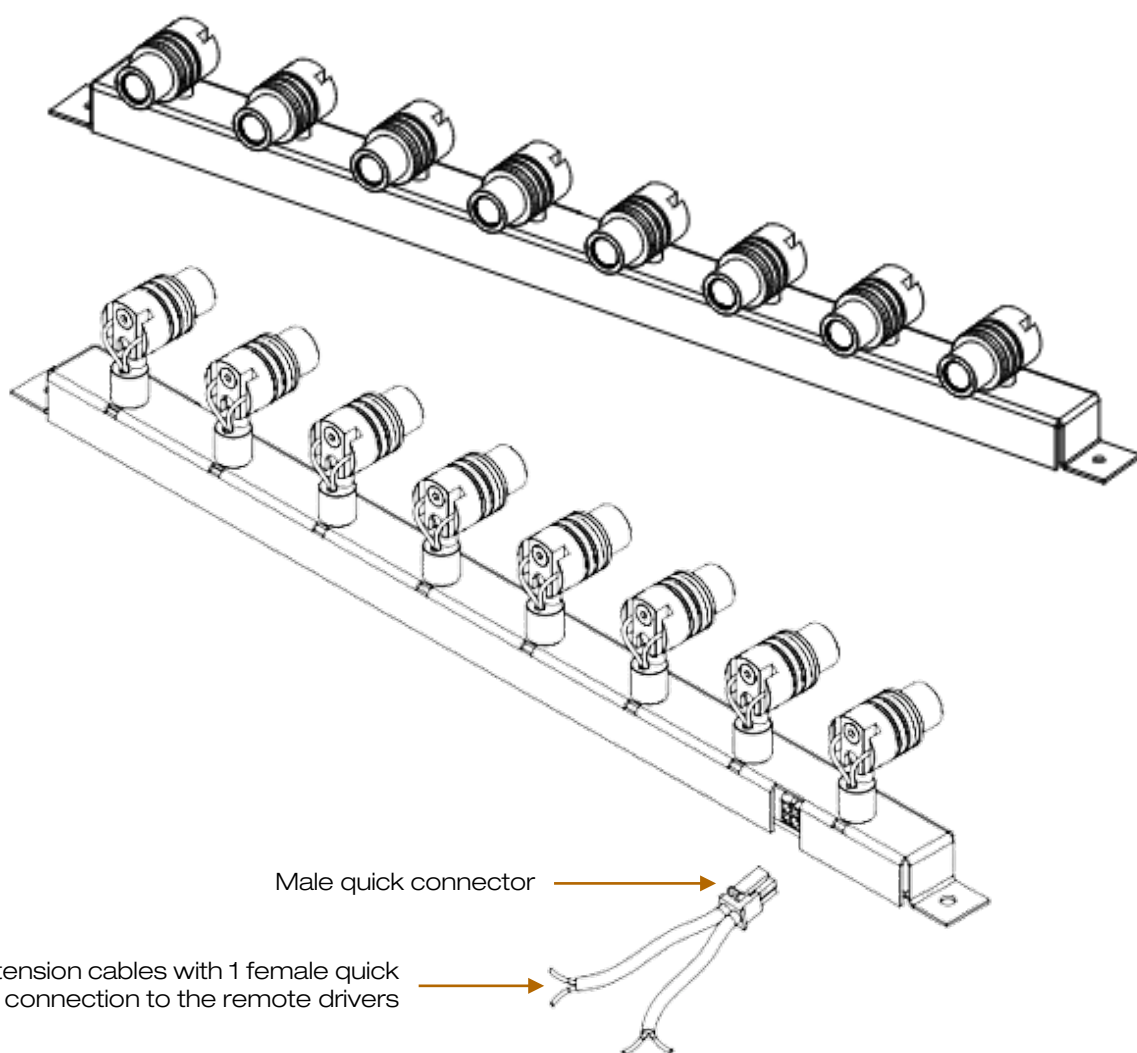


For the USA & Canada use remote UL class 2 constant current drivers


All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

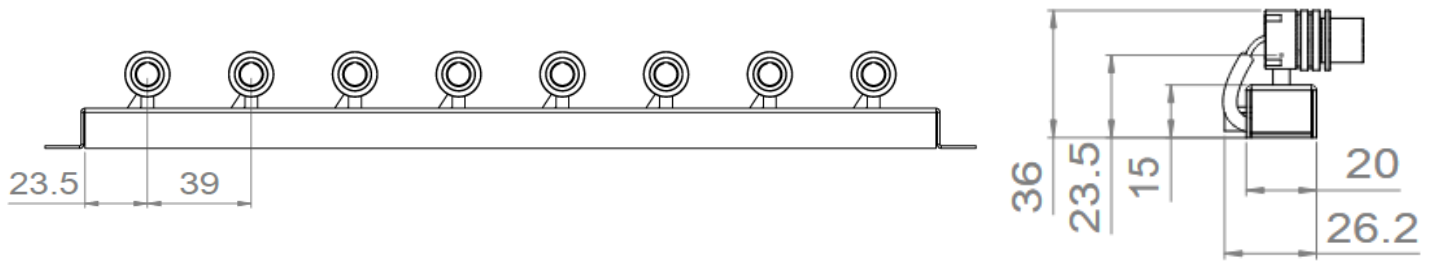


Cable connected in the front side of the luminaire

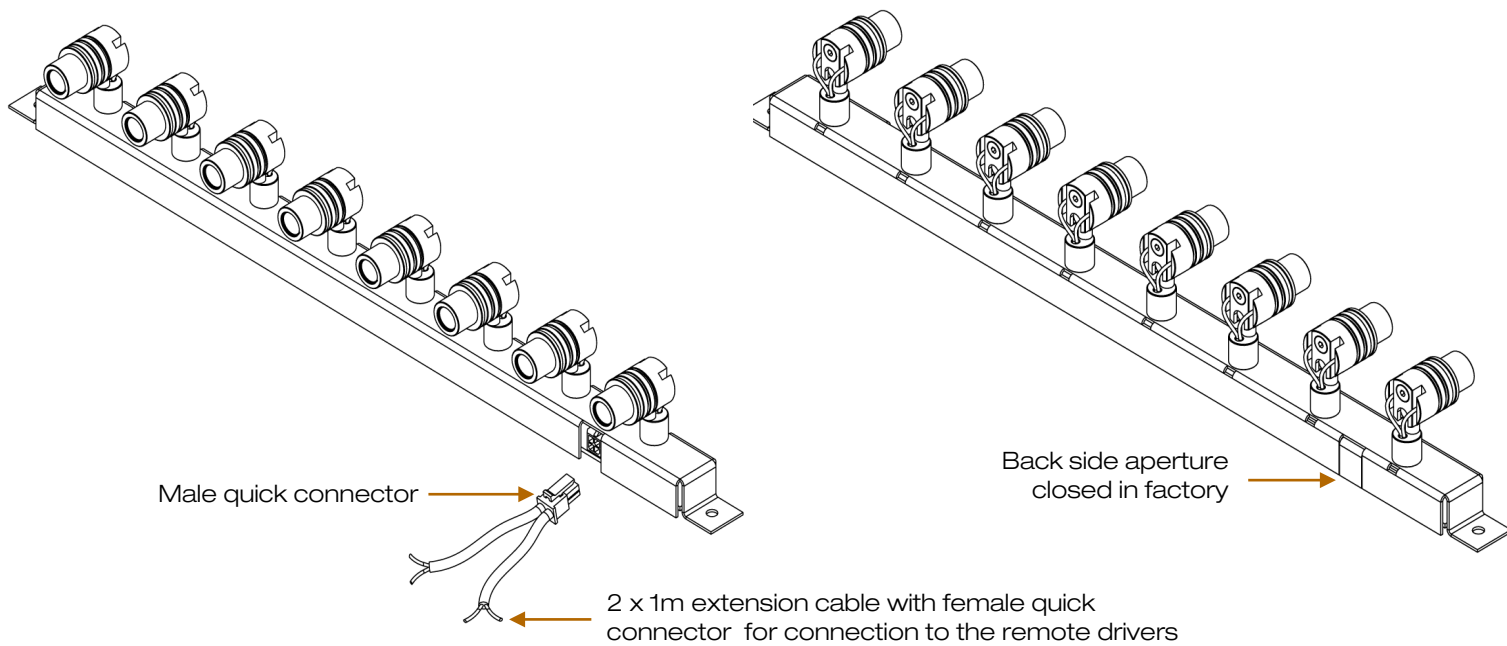


Cable connected in the back side of the luminaire

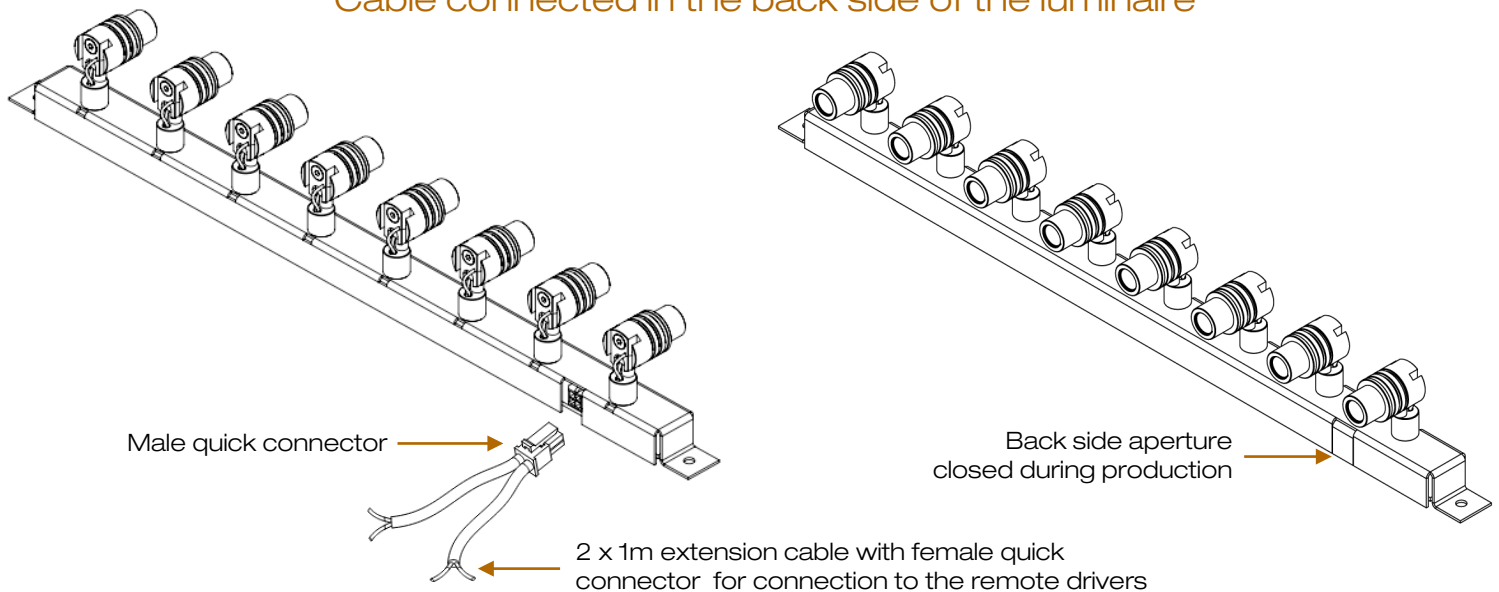


Cable connected in the front side of the luminaire

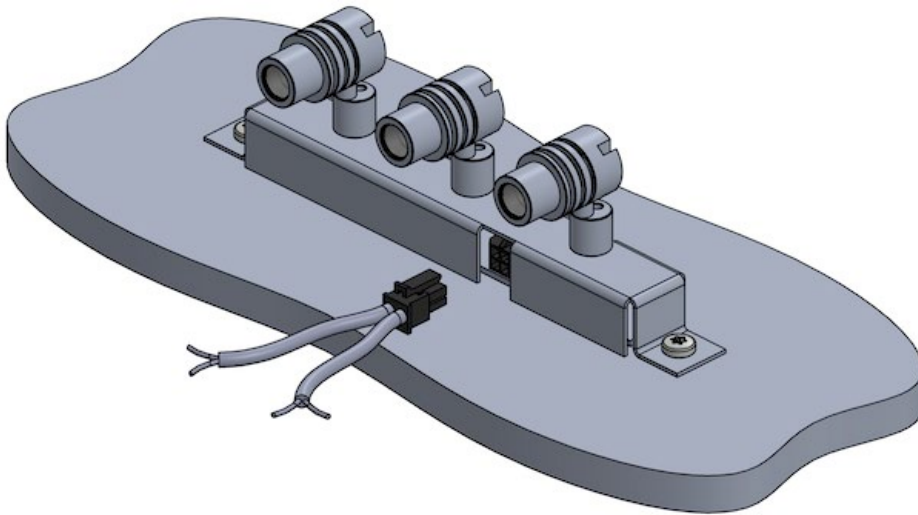

Luminaire delivered with
2 x 1m extension cable
+ quick connector

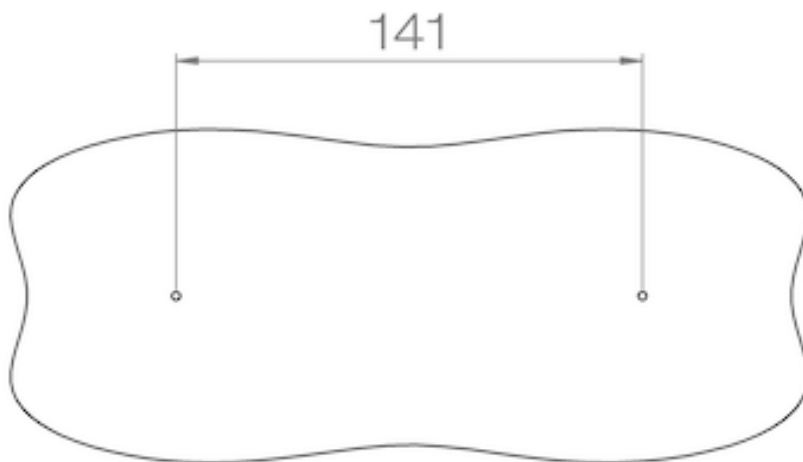

Drill 2 holes according
to the diameter & kind of screws

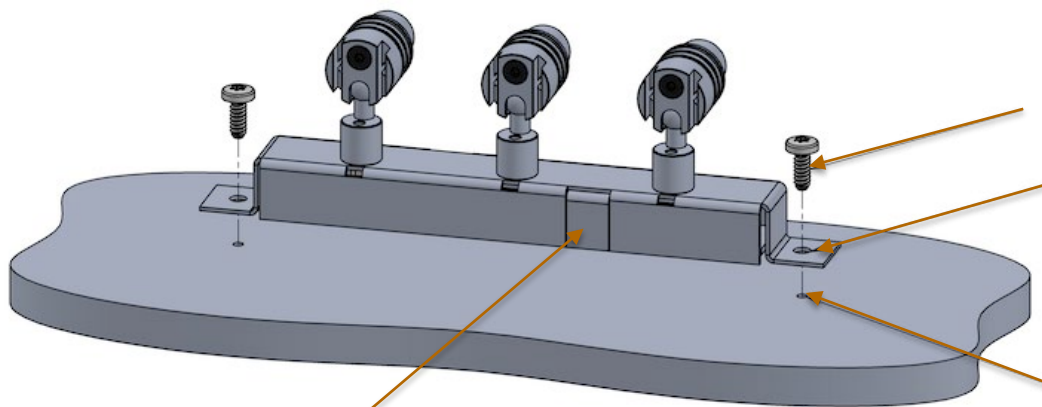

Use adequate screws
according to the surface

Fixing holes $\varnothing$ 4.2mm


Holes according to the
material & the kind of screws

Back side aperture closed in factory


All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Last update : 2025.07.07


Cable connected in the back side of the luminaire

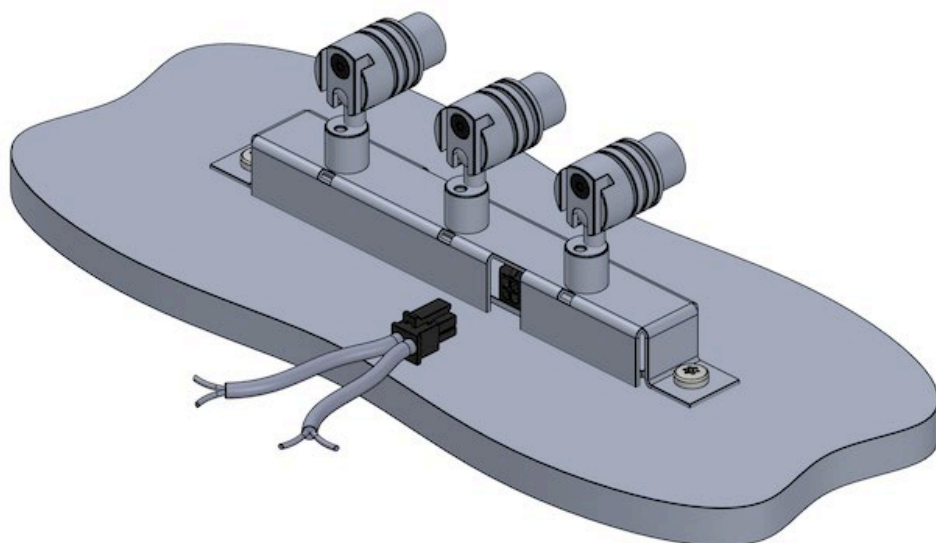

Luminaire delivered with
2 x 1m extension cable
+ quick connector

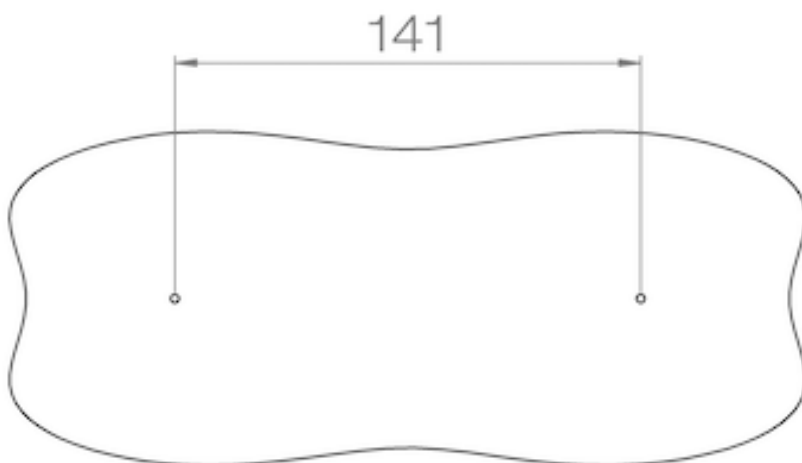

Drill 2 holes according to the
diameter & kind of screws

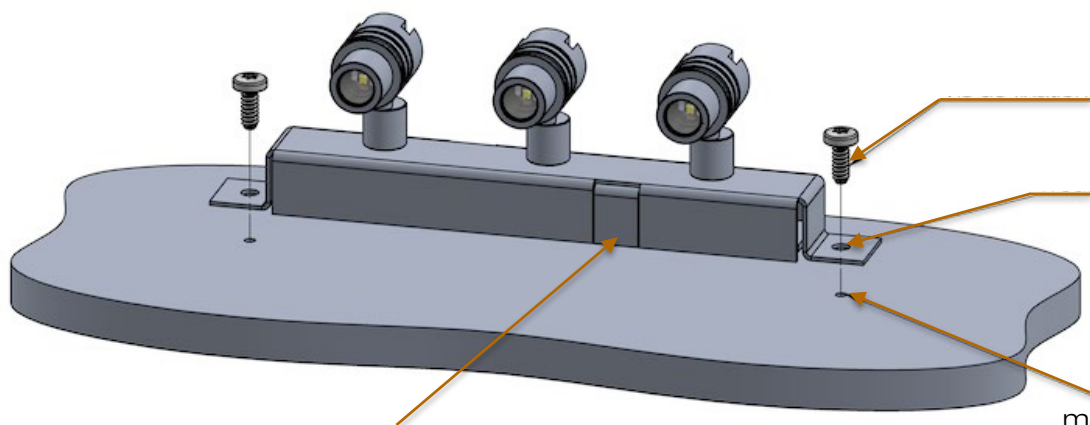

Use adequate screws
according to the material

Fixing holes $\varnothing$ 4.2mm

Holes according to the
material & the kind of screws

Front side aperture closed in factory

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.