



SL15






SL15

Range	Linear LED light					
Description	Natural anodized aluminum profile Opal diffuser 2 natural aluminum end caps Fixing clips					
Dimensions	Width : 22mm (with fixing clips) Height : 18mm (with fixing clips) Length upon request up to 3,000mm					
LED characteristics	2700K – 3000K – 3500K – 3000K+3500K – 4000K CRI 90 R9 > 50					
Separate power supply	24V constant voltage For the US & Canada use a remote UL class 2 power supply					
LED Strip	Color temperature	LED power W/m			CRI	Cut-out size
FIRALED 160 (other upon request)	2700K – 3000K 3500K - 4000K	10.4	15.5	18 UGR<25	90	50mm 160
Connection	5m maximum per driver's output					
Use Limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOUSS, must be approved before use					
Warranty	Life span: L80-B10 = 35,000 hours (80% remaining flux) at 30°C ambient temperature 3-year parts and labor warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and receive a functional burn-in					


All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

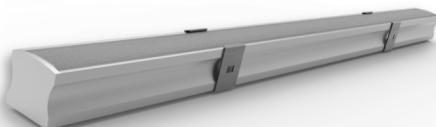


SL15

Dimensions & Installation guide


Natural anodized aluminum profile

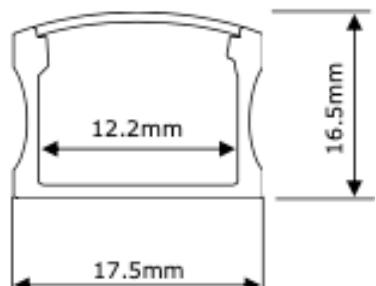

Fixing clips
(2 per meter)




End caps




LED strip – Cut-out size 50mm




5m max per driver's output

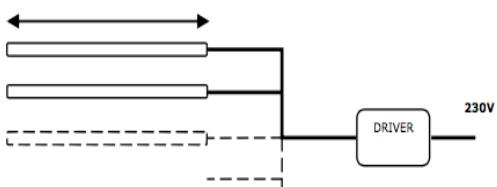

1

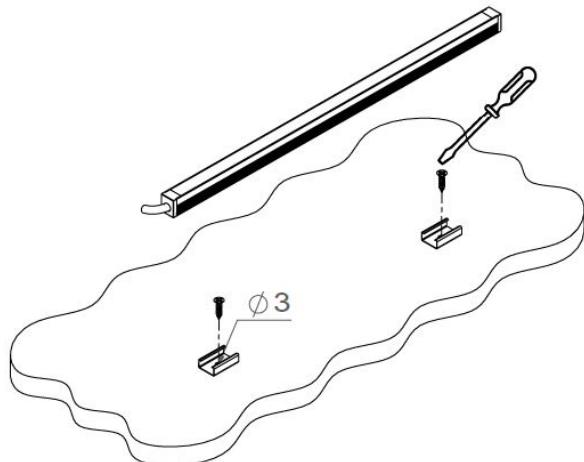

2

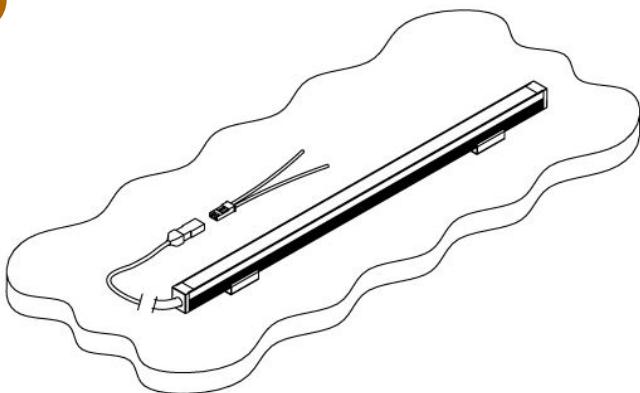

3



All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOUSS


BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Last update : 2025.07.23

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOUSS

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

3/4

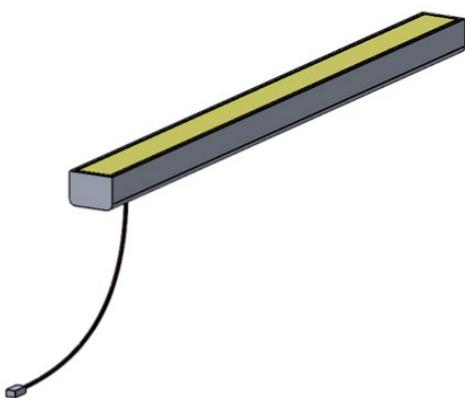


Cable below

110mm or 250mm cable + male quick connector on 1 end

or

1m cable + male quick connector on 1 end

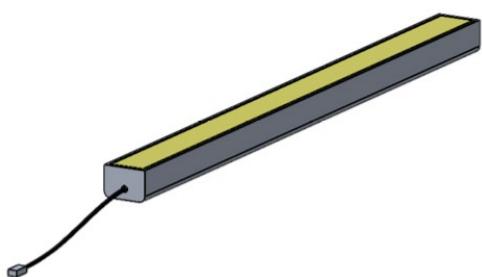


Cable on 1 end

110mm or 250mm cable + male quick connector on 1 end

or

1m cable + male quick connector on 1 end

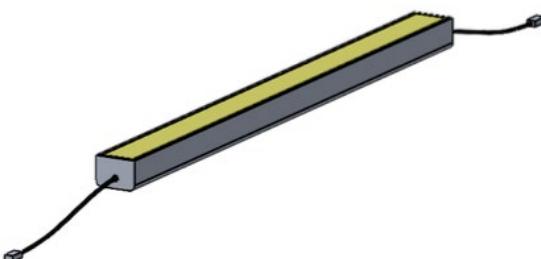


Daisy chain

110mm or 250mm cable + male quick connector on 1 end

+

110mm or 250mm cable + female quick connector on the other end

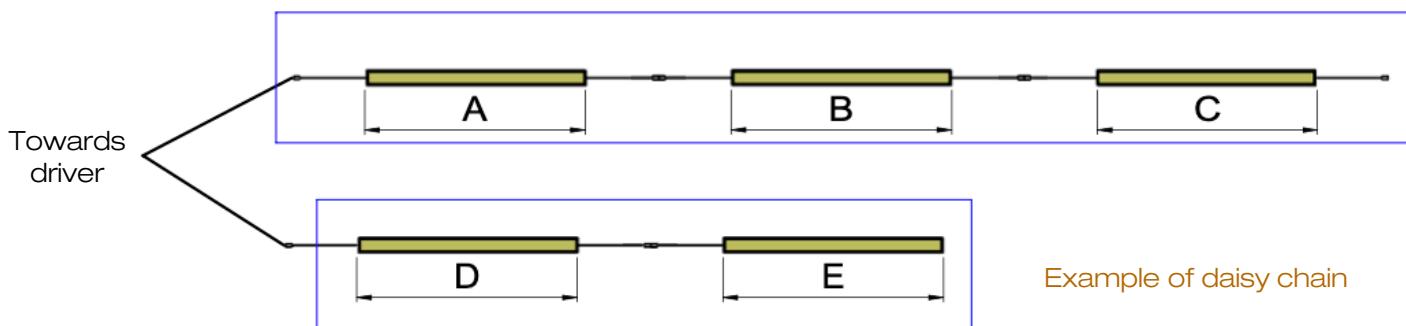

Create as many lines as needed to respect the maximum length per line,
according to the selected LED strip and the wattage of the driver

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged