



XS0806













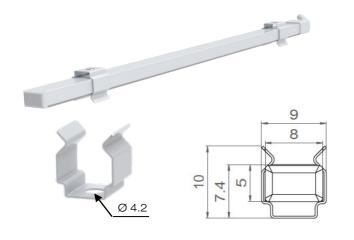



XS0806

Range	Linear LED light			
Description	Natural anodized aluminium profile + opal diffuser + 2 fixing clips/m + 2 end caps			
Dimensions	Width: 9mm - Height: 10mm, with fixing clips Length upon request any 2500mm max			
LED Strip	Colour temperature	LED power W/m	CRI	Cut-out size mm
FIRASLIM 120CC	2700K - 3000K 3000K+3500K - 4000K	9.6	90	50
Separate power supply	24V			
Connection	5m maximum per driver's output			
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.			
	Life span: L80R10 at 50 000 k	nours (80% remaining	ı flux) at 25°C aı	mhiant tamnaratura
	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty.			
Warranty	The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.			

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.



Firalux & LOuss brands

Last update: 28.07.2022