












**SL8**

 indoor	 IP20	 Ta 25°		 CE	made in <b>FRANCE</b>
 outdoor	 IP65	 Ta 25°		 CE	made in <b>FRANCE</b>



SL8

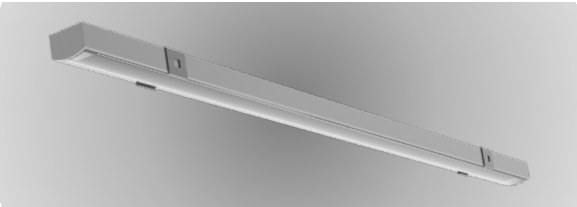
Range	Linear LED light						
Description	SL8 natural anodized aluminum profile LED strip (IP20) PCB LED (IP65) Opal or clear diffuser 2 natural aluminum end caps Fixing clips						
Dimensions	Width : 26mm (with fixing clips) Height : 10mm (with fixing clips) Length upon request up to 3,000mm						
LED characteristics	2700K – 3000K – 3500K – 4000K CRI 90 R9 > 50						
Separate power supply	24V constant voltage For the US & Canada use a remote UL class 2 power supply						
LED Strip / Engine	Color temperature	LED power W/m			CRI	Cut-out size	LED/m
FIRALED 160 – IP20 (other upon request)	2700K – 3000K 3500K – 4000K	10.4	15.5	18 UGR<25	90	50mm	160
LED engine – IP65	2700K – 3000K 3500K – 4000K	9.6	14.4	19.2	90-95	100mm	120
Connection	LED Strip : 5m maximum in series LED Engine : 9.6W – 7m max. in series 14.4W – 5m max. in series 19.2W – 3.5m max. in series						
Use Limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use						
Warranty	Life span: L80-B10 = 35,000 hours (80% remaining flux) at 30°C ambient temperature 3-year parts and labor warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and receive a functional burn-in						

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged



Last update : 2025.07.23


2/4  
Firalux & LOuss brands

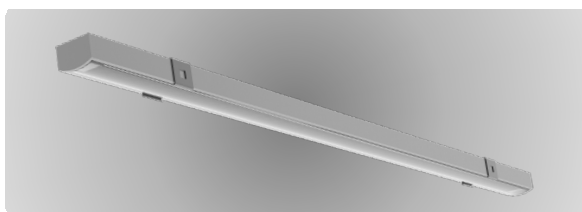


# SL8

## Dimensions & Installation guide


Natural anodized aluminum profile

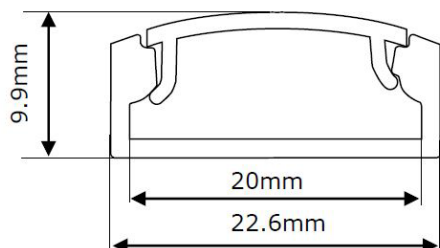

Fixing clips (2 per meter)

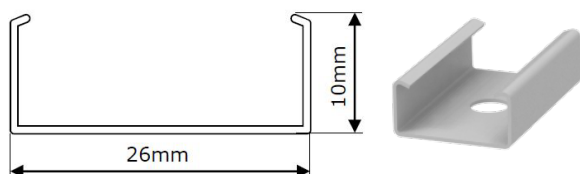


End caps

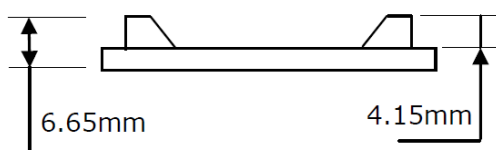


LED strip – Cut-out size 50mm  
LED Engine – Cut out size 100mm



1

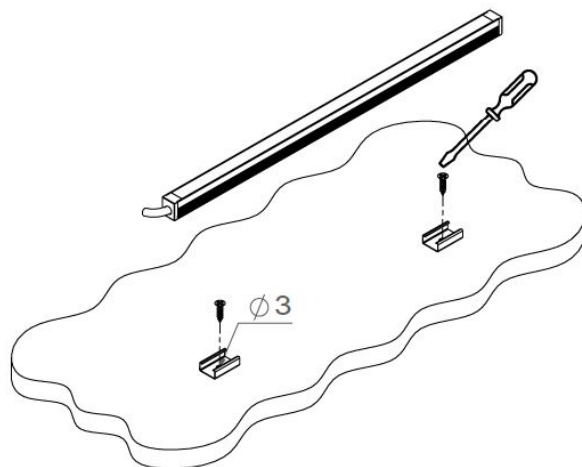

2

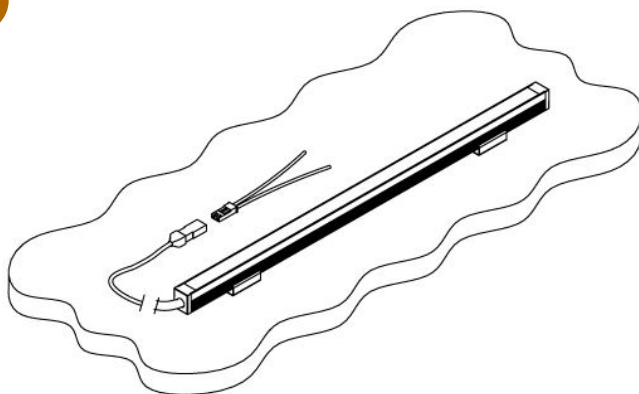

3



All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Louss


Last update : 2025.07.23

3/4  
Firalux & LOuss brands

SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z


Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best group

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE

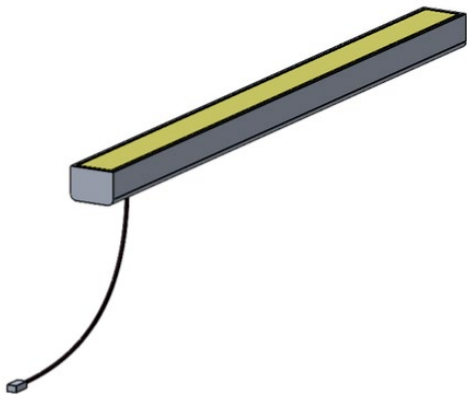


Cable below

110mm or 250mm cable + male quick connector on 1 end  
or  
1m cable + male quick connector on 1 end

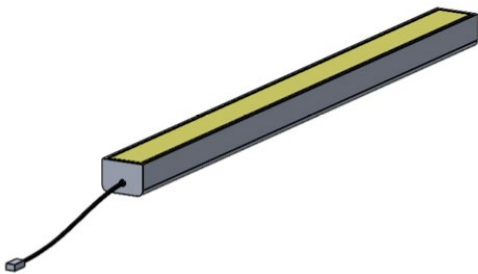


Cable on 1 end

110mm or 250mm cable + male quick connector on 1 end  
or  
1m cable + male quick connector on 1 end

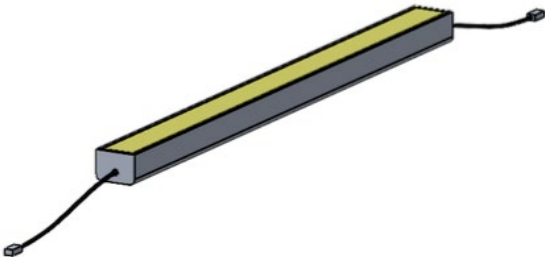

Daisy chain

110mm or 250mm cable + male quick connector on 1 end  
+  
110mm or 250mm cable + female quick connector on the other end

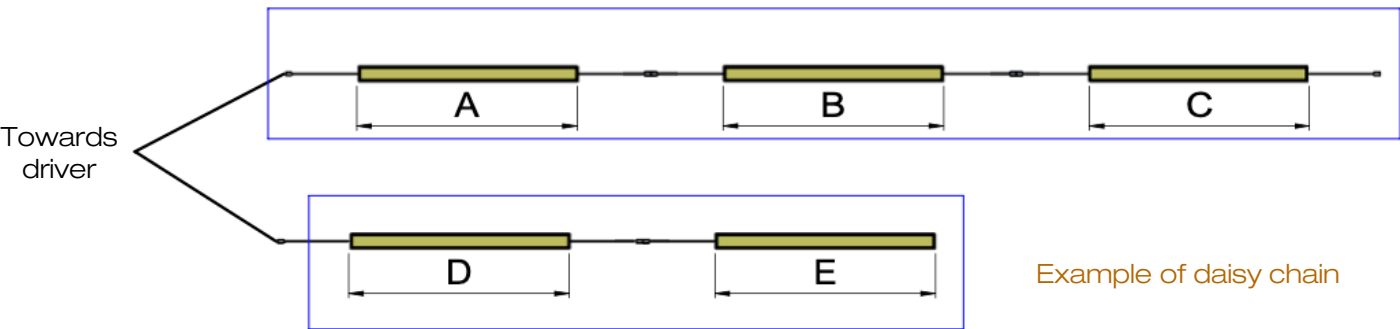

Example of daisy chain

Create as many lines as needed to respect the maximum length per line, according to the selected LED strip and the wattage of the driver

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged