




BRIKE





 indoor	 IP40	Ta 25°			made in FRANCE
 outdoor	 IP54	Ta 25°			made in FRANCE



BRIKE

Range	Low luminance luminaire for general and accent lighting			
Description	Raw aluminum heatsink Molded aluminum body with paint finish			
	3/6 LEDs Recessed	3/6 LEDs Recessed Magnetic		3/6 LEDs Surface-mounted
	Supplied with fixing brackets	• Supplied with magnets only Or • Supplied with magnets and a recess box equipped with fixing brackets		Supplied with magnets and a recess box
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)			
Dimensions & Weight (without driver)	3 LEDs Recessed	3 LEDs Recessed Magnetic (without box)	3 LEDs Recessed Magnetic (with box)	3 LEDs Surface-mounted
	Length : 165mm (brackets included) Width : 45.5mm Height : 84.8mm (IP40) 78.6mm (IP54) Recess dimensions : 135.5mm x 45.5mm	Length : 135.5mm Width : 45.5mm Height : 91.5 mm Recess dimensions : 135.5mm x 45.5mm	Length : 204mm (brackets included) Width : 50mm Height : 91.5mm Recess dimensions : 140mm x 50mm	Length : 140mm Width : 50mm Height : 91.5mm
	0.370 kg	0.4 kg	0.690 kg	0.670g
	6 LEDs Recessed	6 LEDs Recessed Magnetic (without box)	6 LEDs Recessed Magnetic (with box)	6 LEDs Surface-mounted
	Length : 302.5mm (brackets included) Width : 45.5mm Height : 84.8mm (IP40) 78.6mm (IP54) Recess dimensions : 273mm x 45.5mm	Length : 273mm Width : 45.5mm Height : 91.5mm Recess dimensions : 273mm x 45.5mm	Length : 342mm (brackets included) Width : 50mm Height : 91.5mm Recess dimensions : 278mm x 50mm	Length : 278mm Width : 50mm Height : 91.5mm
	0.850 kg	0.9 kg	1.420 kg	1.4 kg

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged



BRIKE

LED characteristics	2700K – 3000K – 3500K - 4000K (other upon request) CRI90 – CRI > 95 upon request
Optical beams	10° - 25° - 40° - 60° UGR < 19
Accessories	Special filter upon request
Connection & Installation	Supplied with safety rope and 0.5m cable (other upon request) An open space of 100mm has to be planned above the ceiling
Power supply	900mA max. external constant current driver Dimmable driver upon request For the US & Canada, use a driver UL class 2
Power	3 LEDs : 9W 6 LEDs : 18W
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOuss

Last update : 2025/07/01

Firalux & LOuss brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d’Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





BRIKE 3 LEDs RECESSED

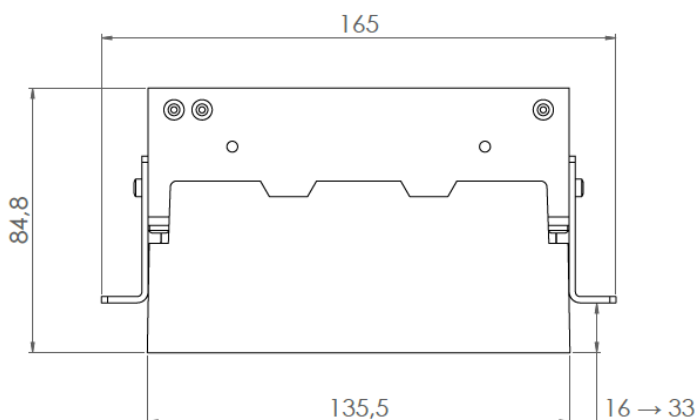


IP40 version

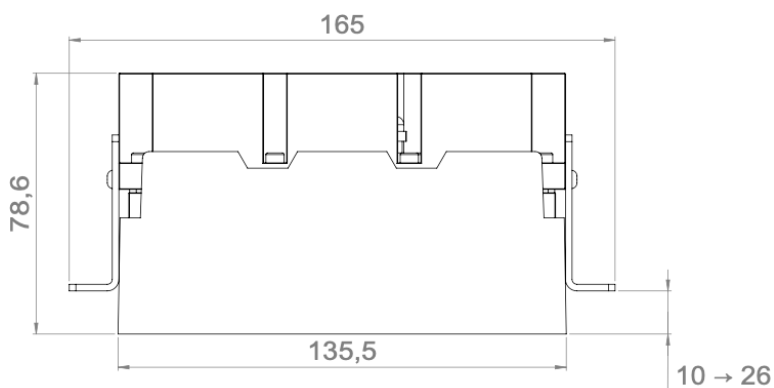


IP54 version

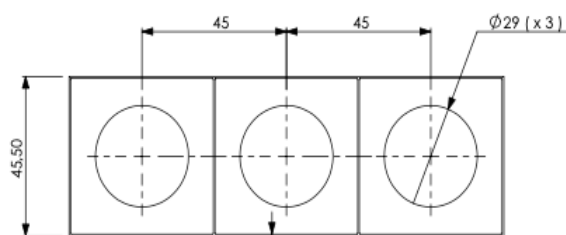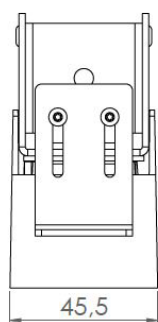

IP40 & IP54 versions

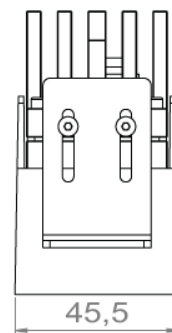

Installation guide

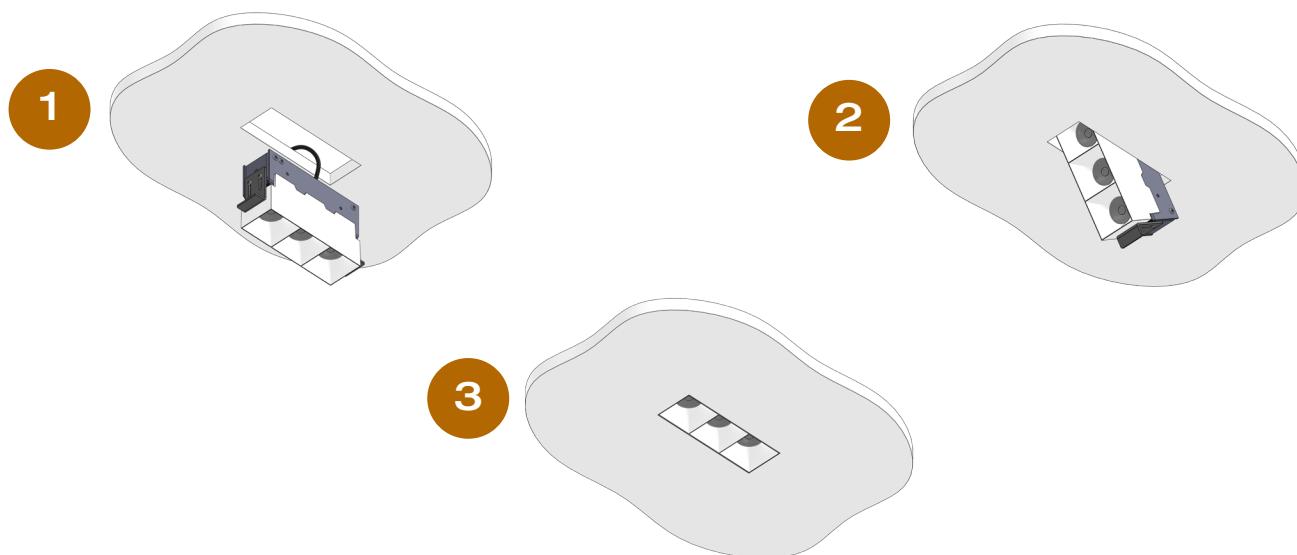

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOUSS




Last update : 2025/07/01

4/11


Firalux & LOUSS brands



BRIKE 3 LEDs RECESSED MAGNETIC (without box)

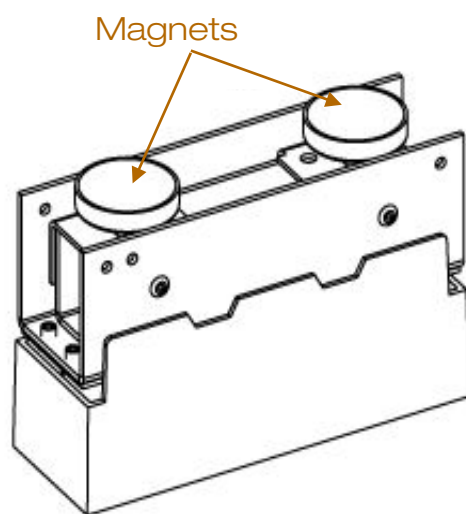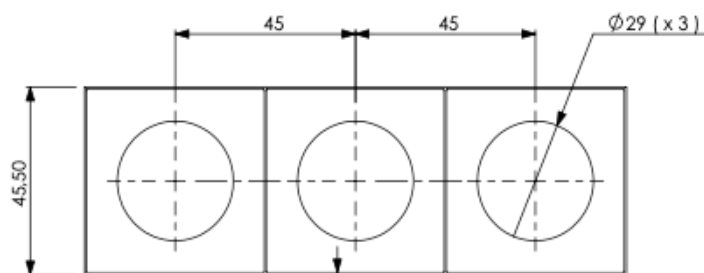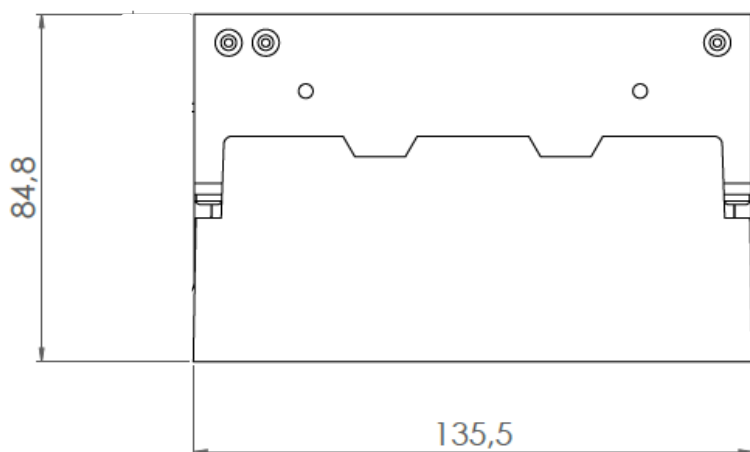

Installation guide

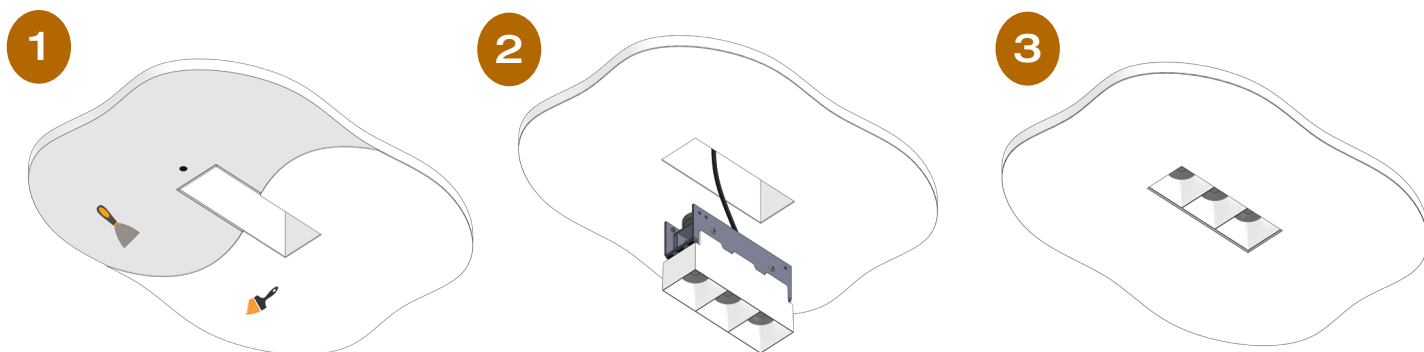

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOUSS


Last update : 2025/07/01

5/11


Firalux & LOUSS brands



BRIKE 3 LEDS RECESSED MAGNETIC (with box)

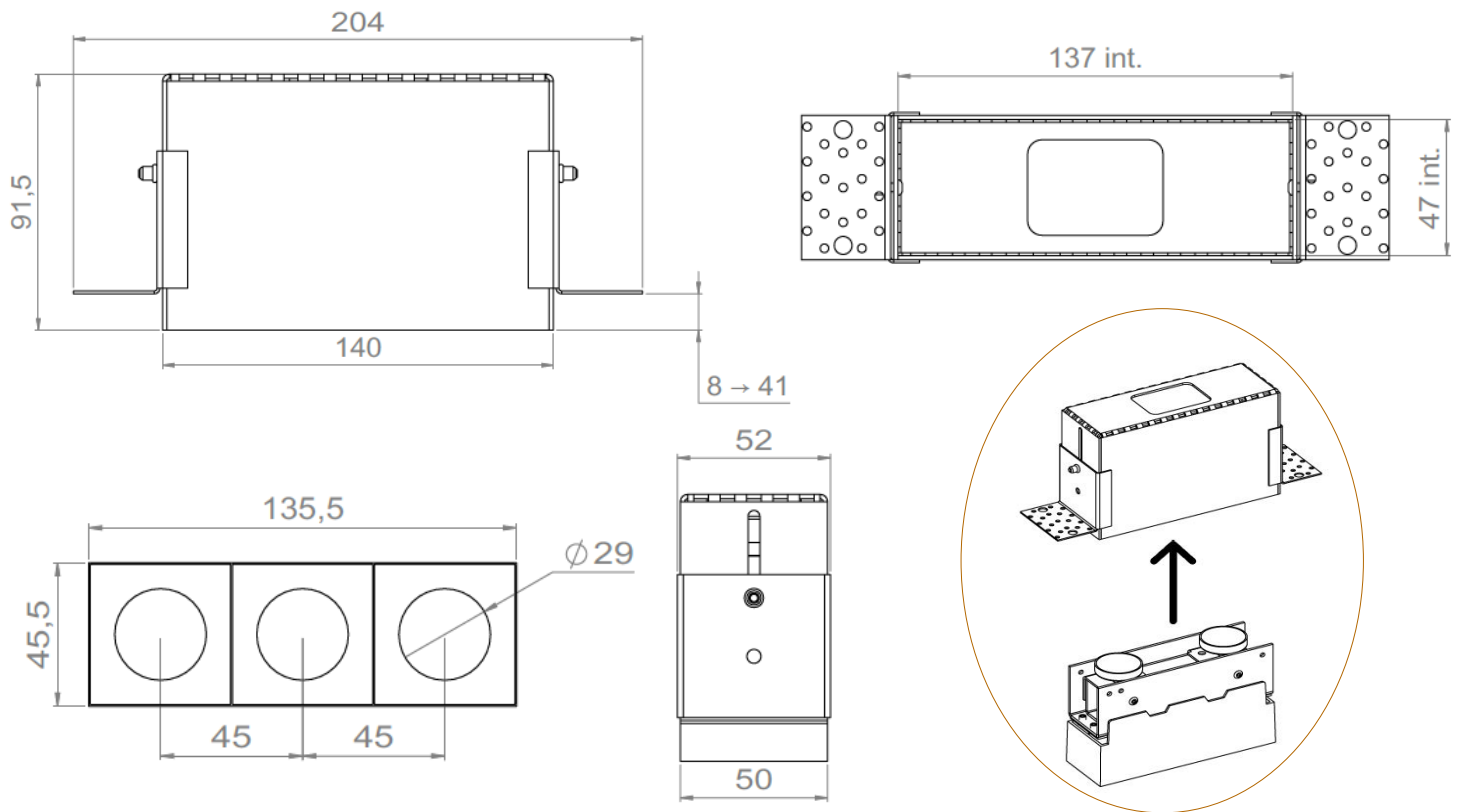

Installation guide

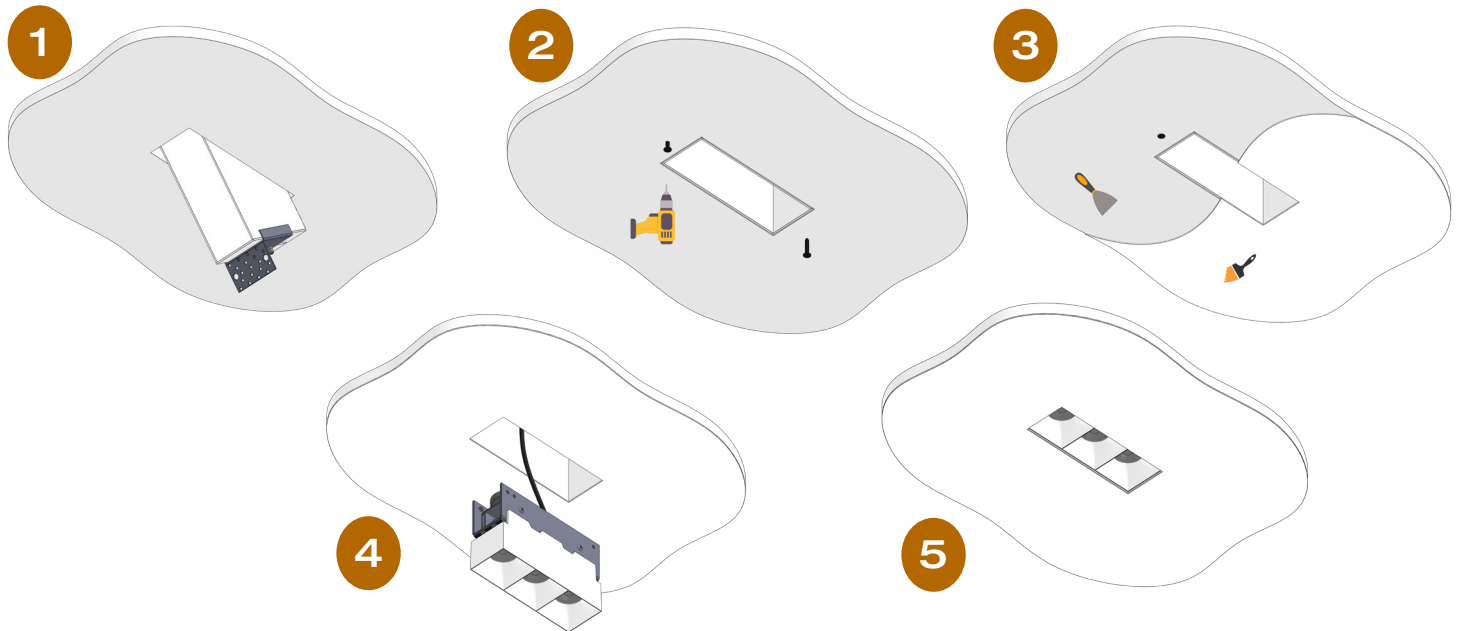

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Louss

Last update : 2025/07/01


6/11

Firalux & LOuss brands






SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



BRIKE 3 LEDs SURFACE-MOUNTED

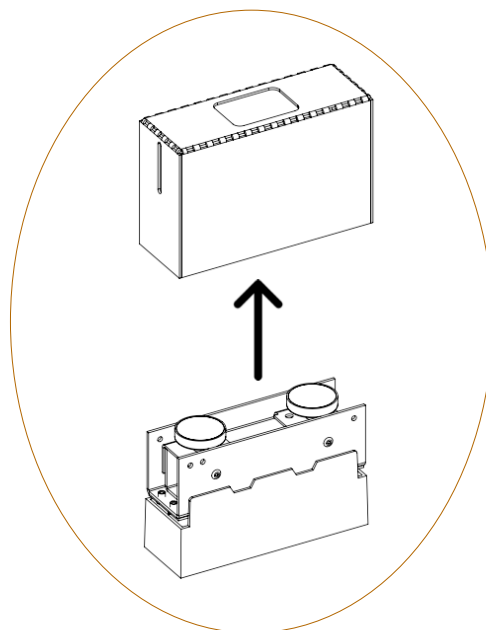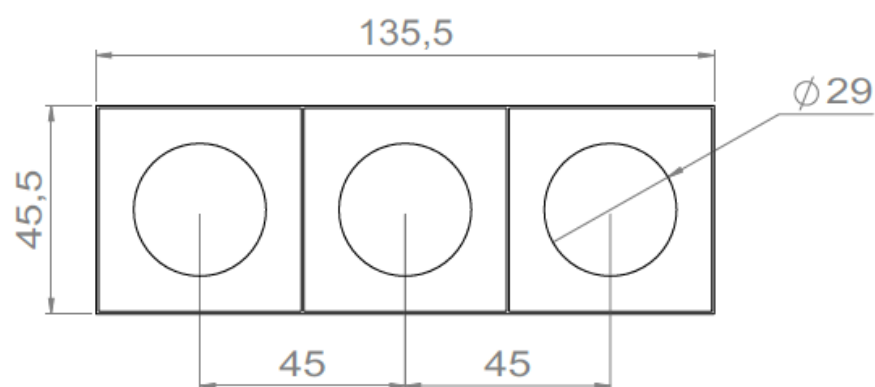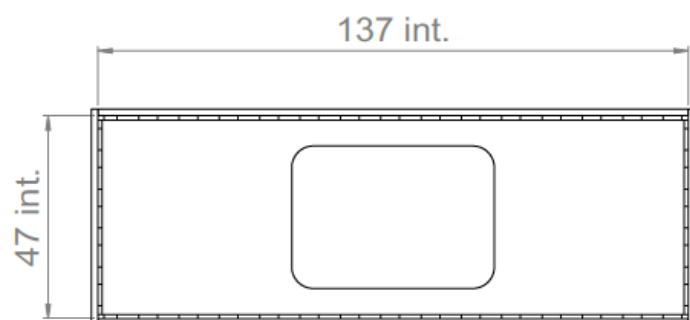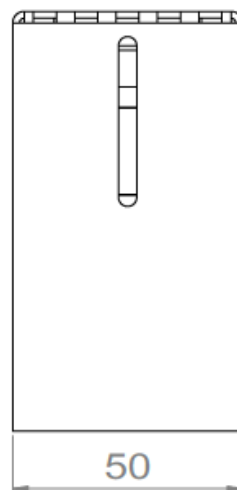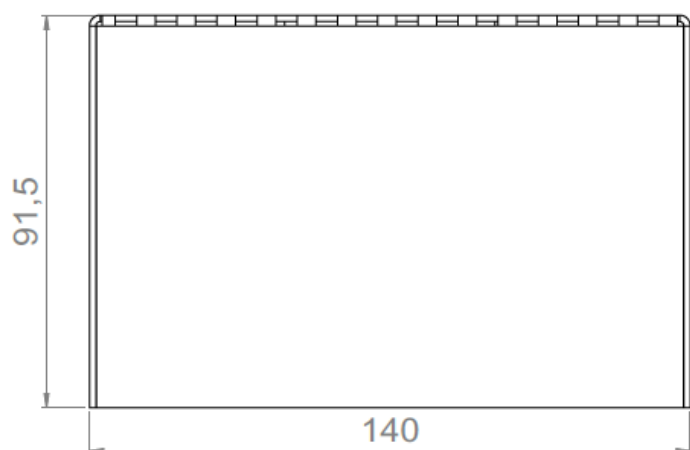

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOUSS

Last update : 2025/07/01


7/11

Firalux & LOUSS brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

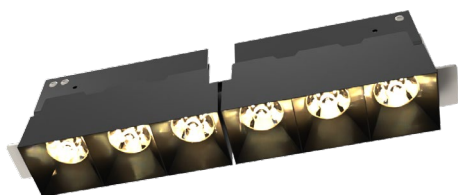

BRIKE 6 LEDs RECESSED

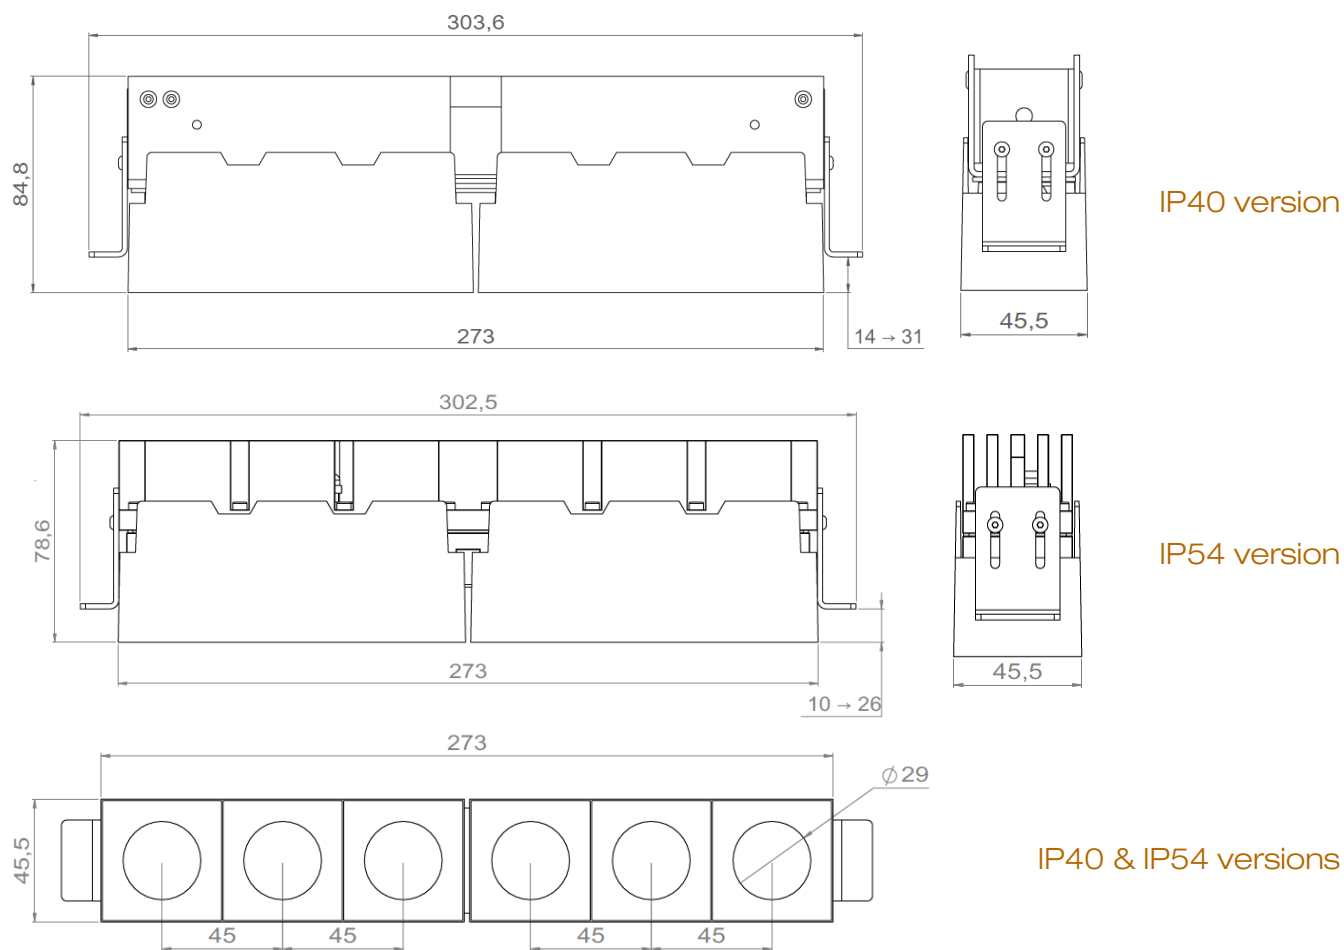

Installation guide

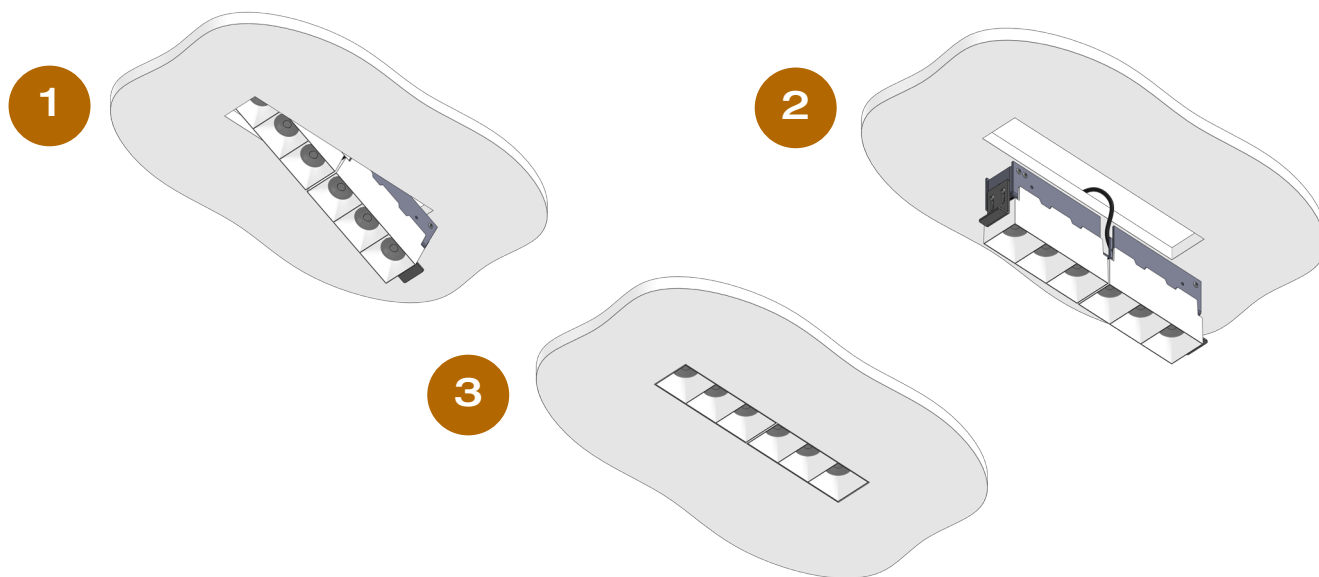

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

LOUSS

Last update : 2025/07/01


8/11

Firalux & LOUSS brands



SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group




Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

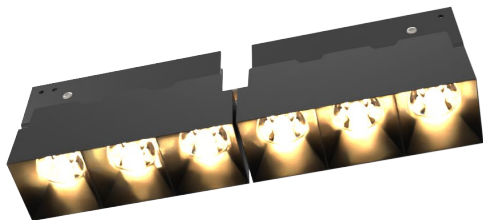

BRIKE 6 LEDs RECESSED MAGNETIC (without box)

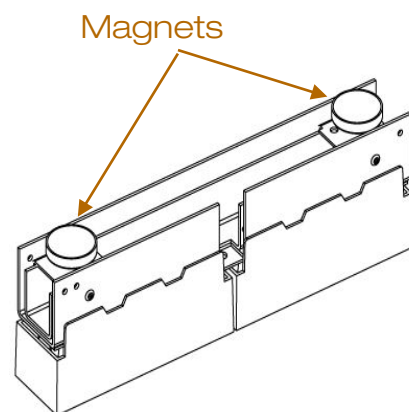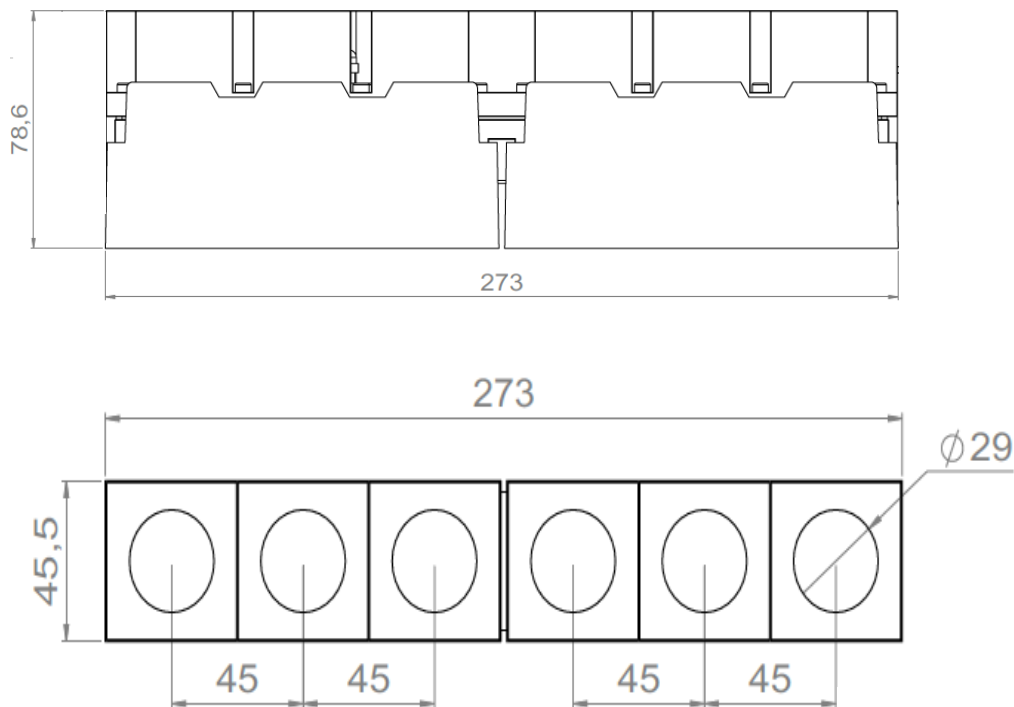

Installation guide

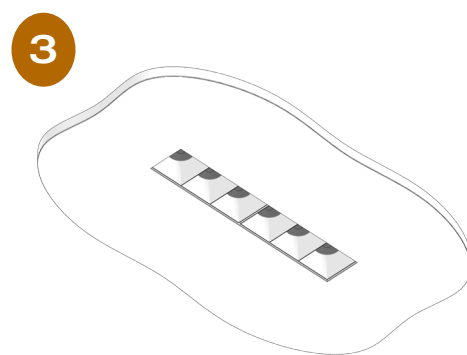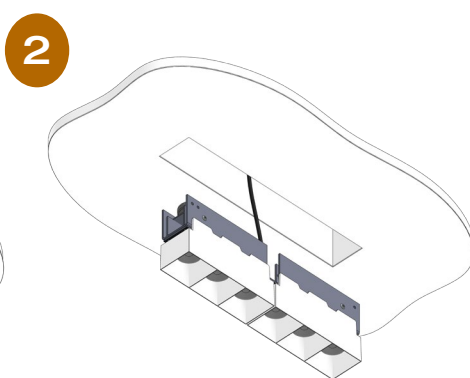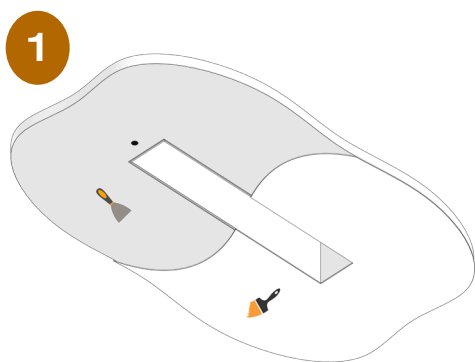

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOUSS

Last update : 2025/07/01


9/11

Firalux & LOUSS brands



SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

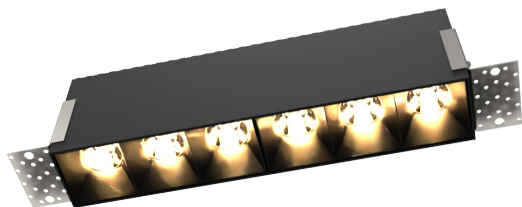

BRIKE 6 LEDs RECESSED MAGNETIC (with box)

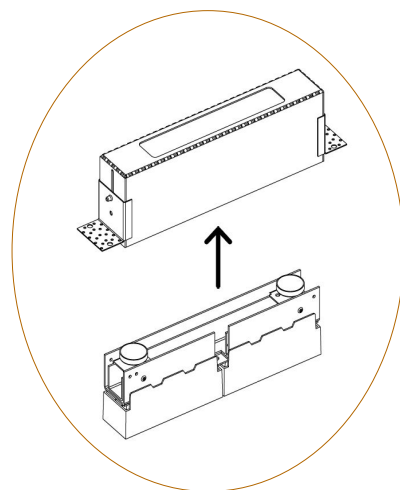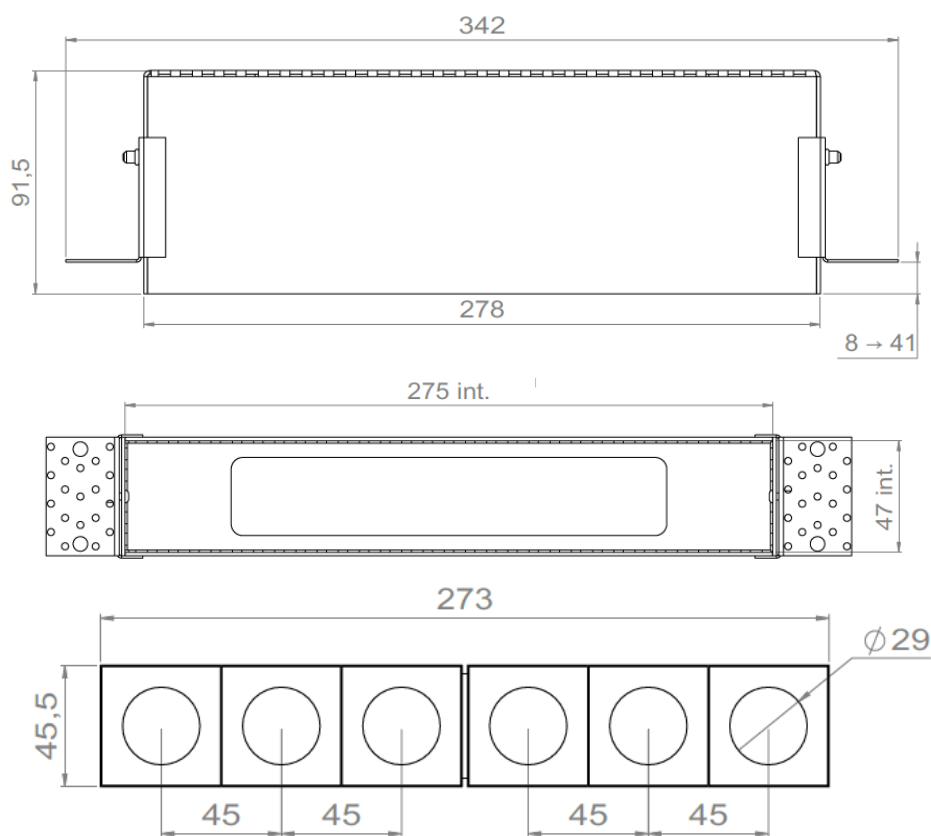

Installation guide

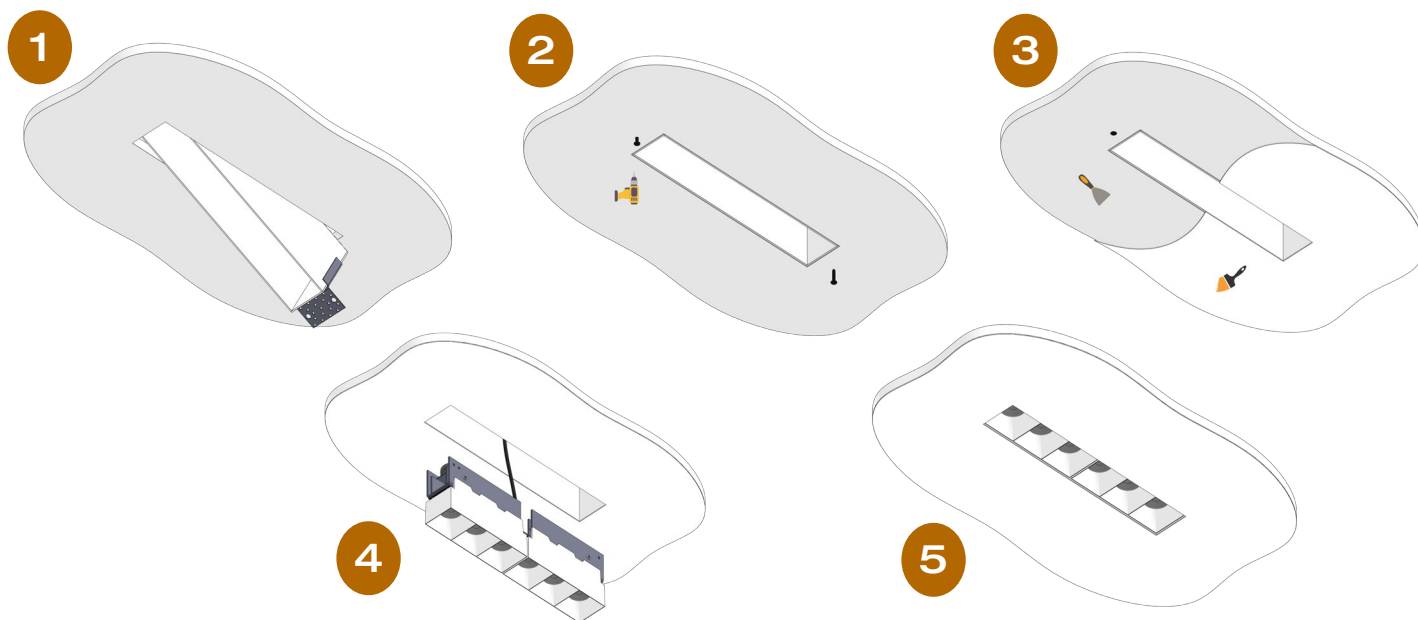

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Louss

Last update : 2025/07/01


10/11

Firalux & LOuss brands






SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

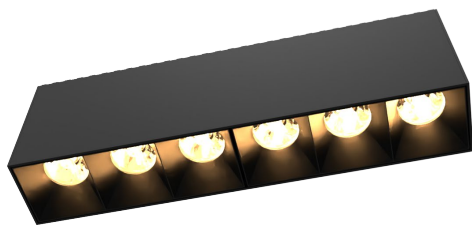

BRIKE 6 LEDs SURFACE-MOUNTED

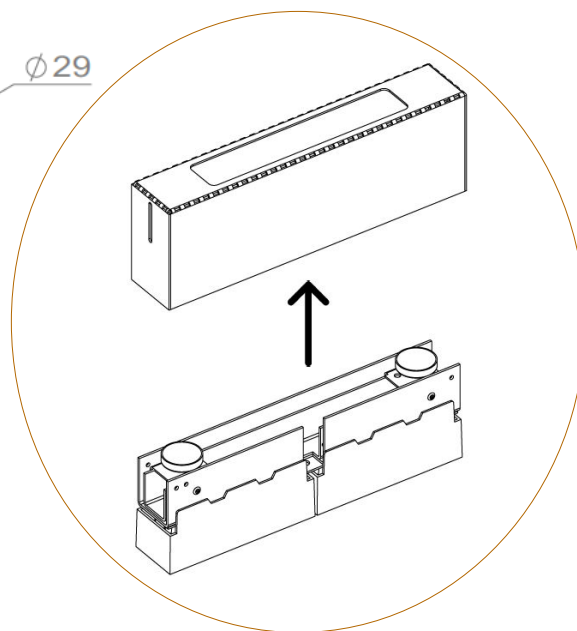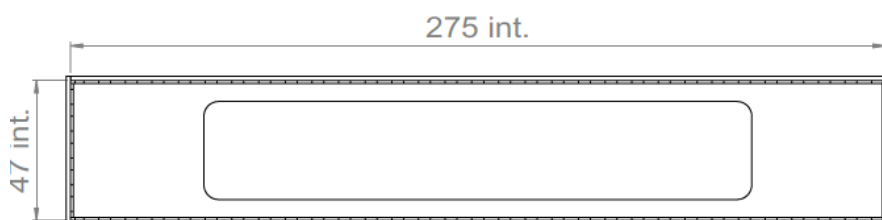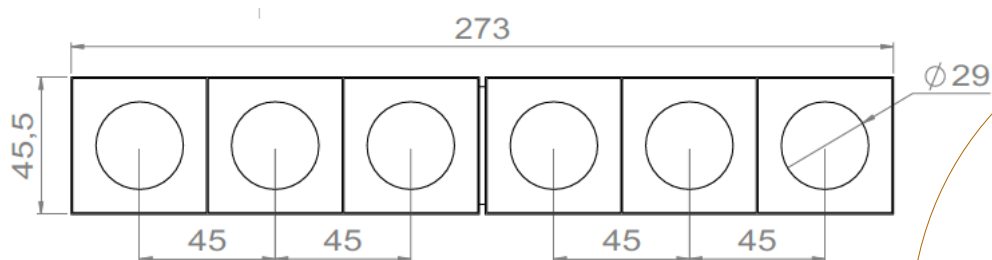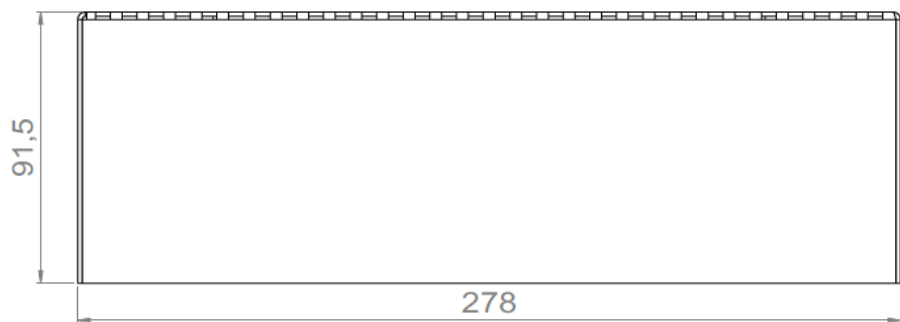

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOUSS

Last update : 2025/07/01

11/11

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE