


## AURORE D52

48V Track version



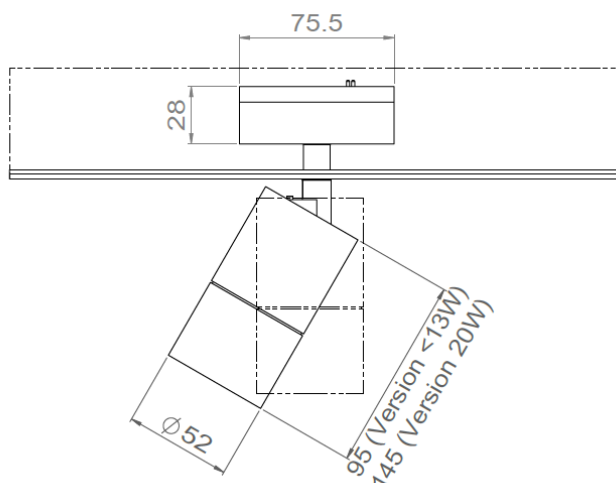

## AURORE D52

### 48V Track version

Range	Highly flexible downlight on track for general & accent cardanic lighting
Description	Low luminance Rotation 355° - Adjustable tilt 90° White finish RAL 9003 (other upon request)
Net weight	0.50 kg
Installation	No specific tools required
LED characteristics	2700K - 3000K - 3500K - 4000K - 5000K MacAdam ellipse: 3 SDCM (standard version) – 2 SDCM (premium version) CRI: 90 (standard version) – 95, R9 > 90 (premium version) UGR < 15 LED 600 to 2.000 lm
Optical beam	7° - 12° - 15° - 20° - 25° - 30° - 35° - Elliptic Special filter, honey comb upon request
Power supply	Spot adaptor for 48V on track Power supply of 230V/48V to plan for the track
LED power	6W to 12W integrated driver
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged.

LOuss

Last update : 06/02/2025

Firalux & LOuss brands

SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best group

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE