



# LOUSS

Lighting Emotion



## LEVANA


The secret downlight

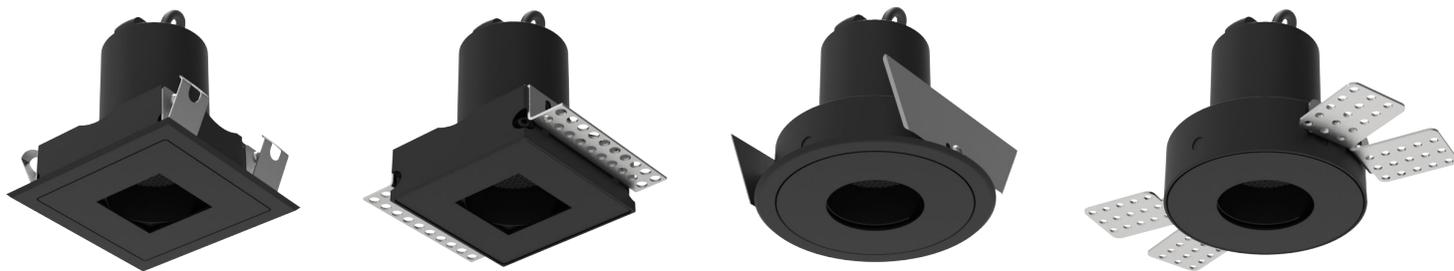

**LEVANA • C60 & C75 Trim • C60 & C75 Trimless • D70 & D85 Trim • D70 & D85 Trimless**

<b>Range</b>	Square (C reference) or round (D reference) adjustable recessed downlight for general & accent lighting							
<b>Description</b>	Luminaire to be recessed in 10 to 20mm thick BA13 plasterboard or wood ceilings Aluminum mechanic parts Trim versions : stainless steel fixing device Trimless versions : stainless steel brackets Rotation 355° - Adjustable tilt 30° Low luminance Easily changeable LED, optics and accessories on site, without any tool, with integrated LOuss <b>Permuto</b> easy swap system (see page 8)							
<b>Finish</b>	White RAL 9003 matt finish - Black RAL 9005 matt finish (other upon request)							
<b>Dimensions &amp; Net weight</b>	<b>LEVANA C60</b>				<b>LEVANA C75</b>			
	<b>TRIM</b>		<b>TRIMLESS</b>		<b>TRIM</b>		<b>TRIMLESS</b>	
	76 x 76 x 74.8mm		93 x 63 x 74.8mm With fixing brackets		91 x 91 x 90mm		108 x 78 x 90mm With fixing brackets	
	0.250 Kg		0.260 Kg		0.400 Kg		0.410 Kg	
	<b>LEVANA D70</b>				<b>LEVANA D85</b>			
	<b>TRIM</b>		<b>TRIMLESS</b>		<b>TRIM</b>		<b>TRIMLESS</b>	
86mm x 74.8mm		136 x 73mm With fixing brackets		101 x 90mm		150 x 88mm With fixing brackets		
0.300 Kg		0.310 Kg		0.450 Kg		0.460 Kg		
<b>LED characteristics</b>	2700K - 3000K - 3500K - 4000K MacAdam ellipse : 3 SDCM (standard version) - 2 SDCM (premium version) CRI>90 R9>50 - CRI95 R9>90 - CRI > 95 - R1 to R15 > 90							
<b>Optical beam &amp; Performance</b>	<b>LEVANA C60 / LEVANA D70</b>				<b>LEVANA C75 / LEVANA D85</b>			
	<b>Beam</b>	<b>Candela</b>	<b>Power</b>	<b>Photometry</b>	<b>Beam</b>	<b>Candela</b>	<b>Power</b>	<b>Photometry</b>
	11°	10,900cd (3000K)	7W	ies 2591A	7.5°	27,500cd (3000K)	7W	ies 2629A
	15°	6,500 cd (3500K)	8W	ies 2645A	10°	19,000cd (3000K)	12W	ies 2336A
	16°	6,300 cd (3500K)	7W	ies 2642A	13°	15,700 cd (3500K)	12W	ies 2562A
	20°	4,400 cd (3500K)	7W	ies 2510A	17°	7,300 cd (3500K)	9W	ies 2568A
	23°	3,100 cd (3500K)	7W	ies 2511A	24°	3,900 cd (3500K)	12W	ies 2558A
	34°	1,700 cd (3500K)	8W	ies 2617B	32°	2,000 cd (3500K)	12W	ies 2545A
	43°	1,050 cd (3500K)	7W	ies 2513A				
	UGR < 15							

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

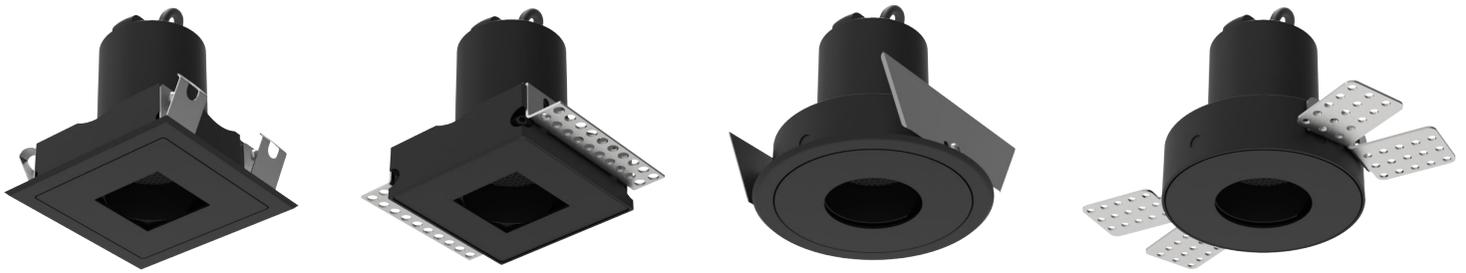




**LEVANA • C60 & C75 Trim • C60 & C75 Trimless • D70 & D85 Trim • D70 & D85 Trimless**

<b>Accessories</b>	Filter, honeycomb grid upon request			
<b>Power</b>	<b>LEVANA C60 / LEVANA D70</b>		<b>LEVANA C75 / LEVANA D85</b>	
	TRIM	TRIMLESS	TRIM	TRIMLESS
	≤ 10W	≤ 10W	< 13W	< 13W
<b>Power supply</b>	<p>150mA to 700mA max. remote constant current driver according to version          The drivers size, supplied by LOuss, is suitable for an installation through the flush-mounted box  <b>Optional</b> : DALI remote driver, Casambi, driver          For USA &amp; Canada use UL class 2 power supply</p>			
<b>Installation</b>	<b>LEVANA C60</b>	<b>LEVANA D70</b>	<b>LEVANA C75</b>	<b>LEVANA D85</b>
	Square opening 65 x 65mm	Round opening Ø 76mm	Square opening 80 x 80mm	Round opening Ø 91mm
	<p>Luminaires supplied with 0.5m cable. Quick connector upon request          The drivers can be remote to a distance up to 5m max. For greater distances (10-15m max.), please contact us. Depending on the installation, anti-surge protection may be provided with the luminaires          Take into consideration the cumulative length of all the cables when connecting several luminaires in series on the same driver</p>			
<b>Use limitations</b>	<p>The product must be installed into a ventilated area          Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees          The drivers, if not delivered by LOuss, must be approved before use</p>			
<b>Warranty</b>	<p>Life span: L80-B10 = 35,000 hours (80% remaining flux) at 30°C ambient temperature          The warranty applies to components and fabrication supplied by LOuss          The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product          All products are electrically tested and receive a functional burn-in</p>			



All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged



## LEVANA C60 TRIM

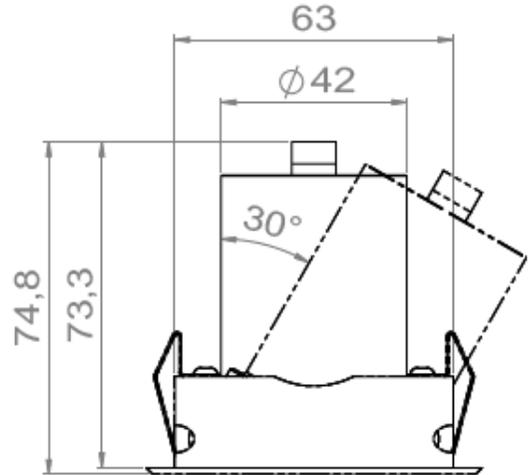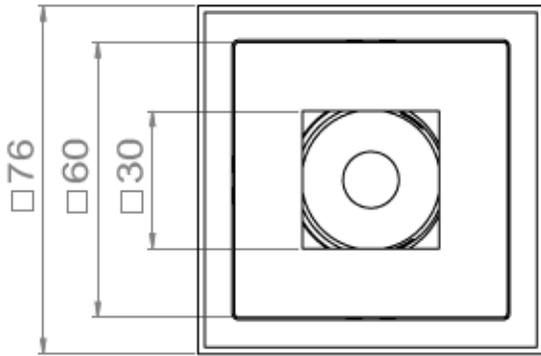




## LEVANA C60 TRIMLESS

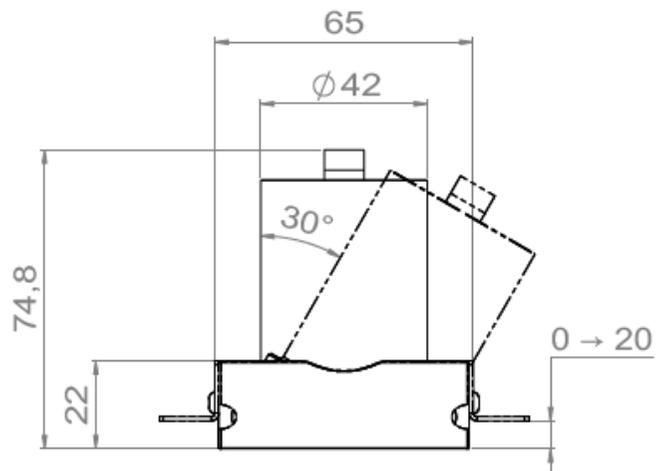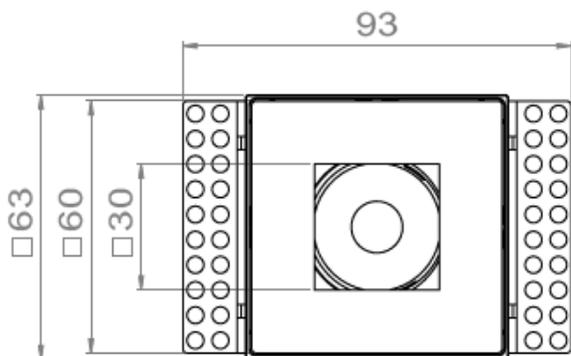



All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged



## LEVANA C75 TRIM

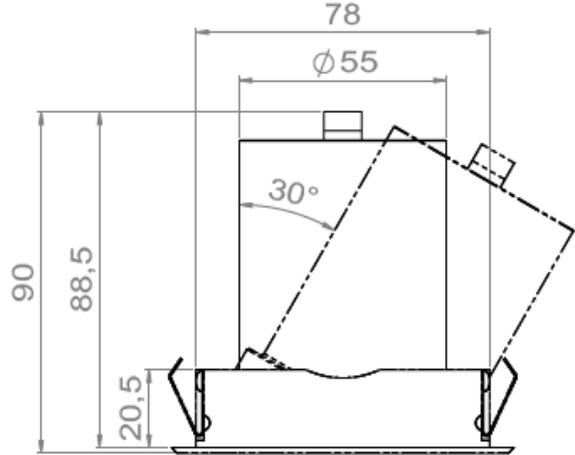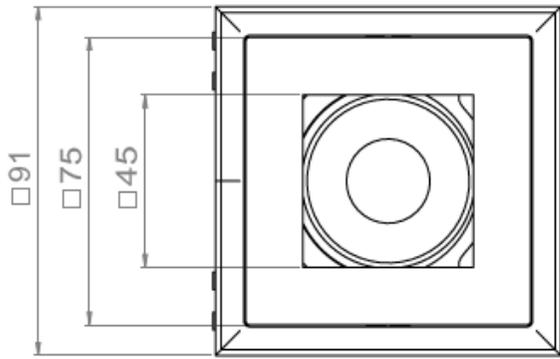



## LEVANA C75 TRIMLESS

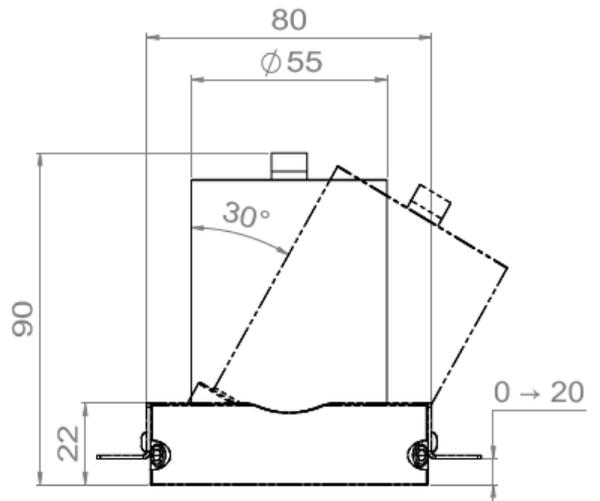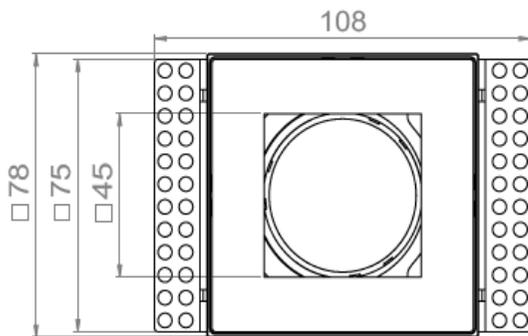



All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged



## LEVANA D70 TRIM

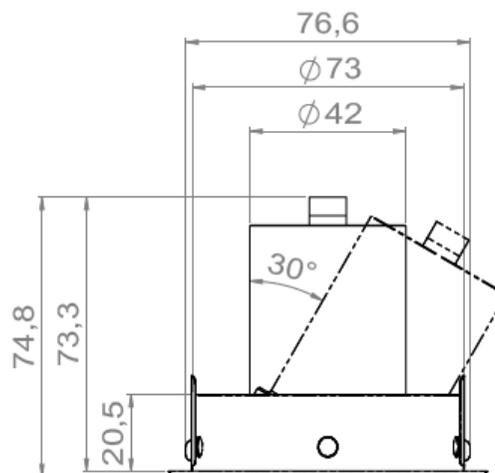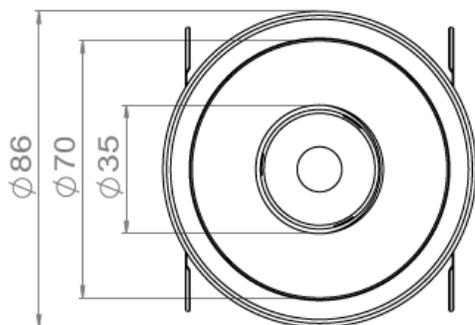

## LEVANA D70 TRIMLESS

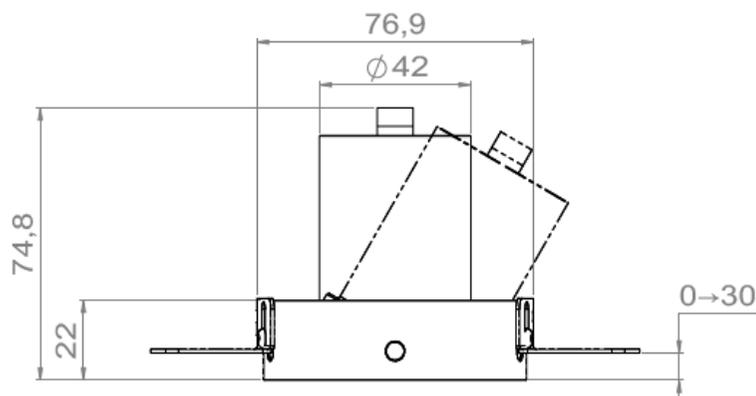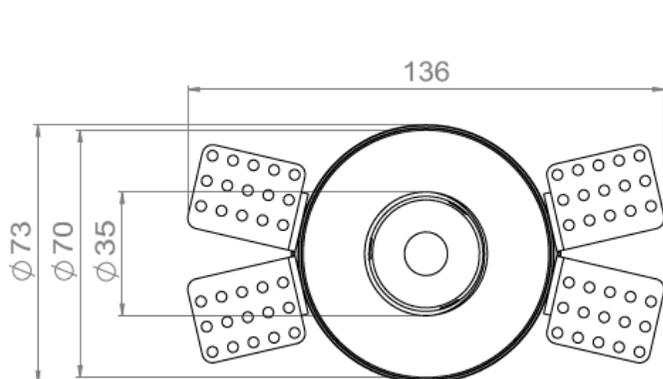

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

LOUSS

Last update: 2026.02.25

6/12




BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOUSS



Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE



## LEVANA D85 TRIM

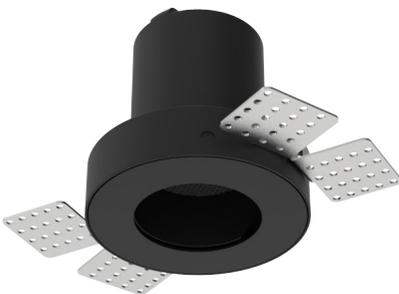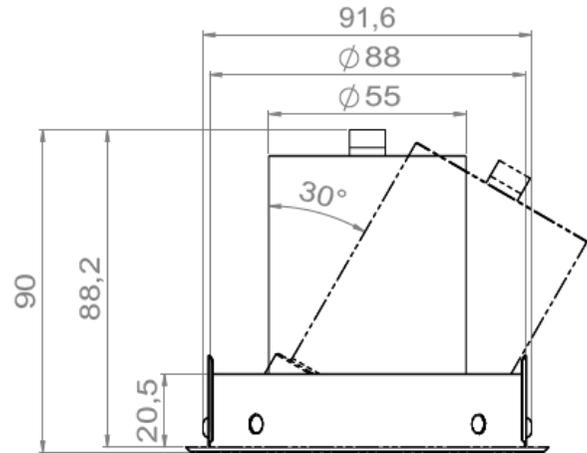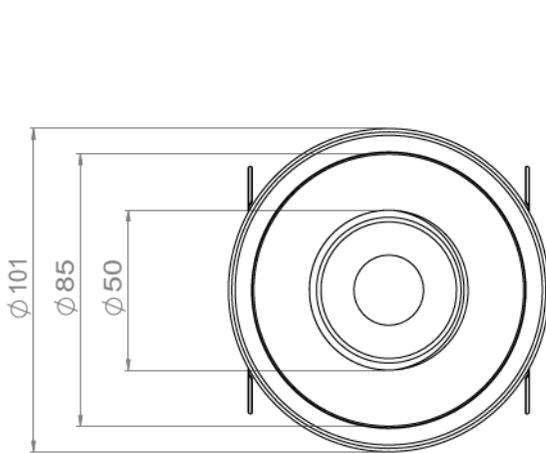

## LEVANA D85 TRIMLESS

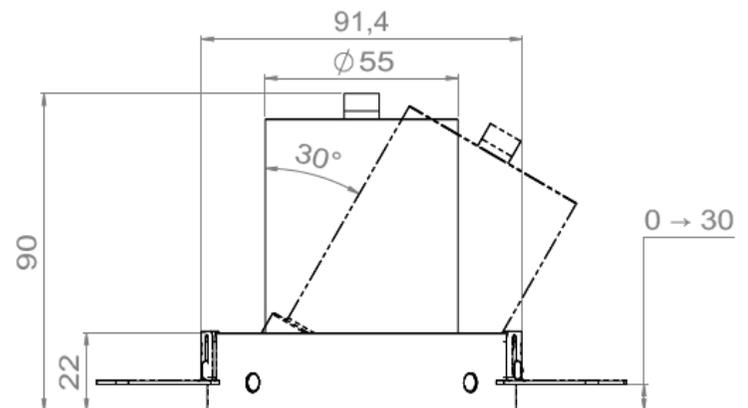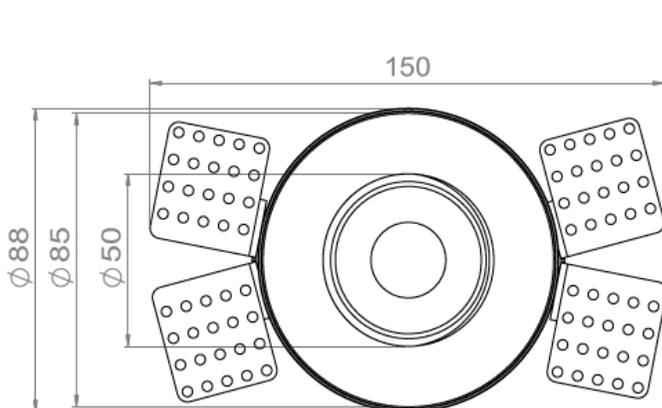

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Louss


Last update: 2026.02.25

7/12

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOUSS

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE

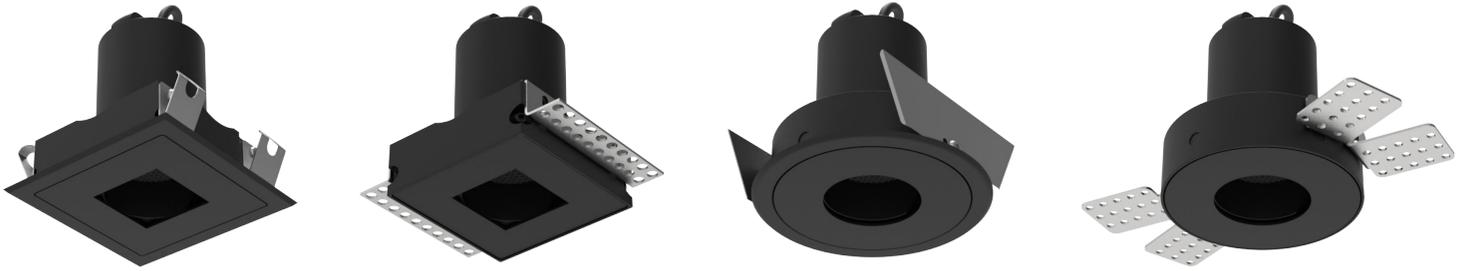

LEVANA • C60 & C75 Trim • C60 & C75 Trimless • D70 & D85 Trim • D70 & D85 Trimless

## LOUSS Permuto - Easy Swap system



Square or round recessed frame according to version

LED / COB

Optics

Accessories (filters, honeycomb grid...)

Spotlight body

Square or round decorative metal plate according to version

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

LOUSS

Last update: 2026.02.25

8/12

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
www.louss.fr  
Best & LOUSS

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE




# LEVANA • C60 & C75 TRIM

Installation guide



1

Surface finishing

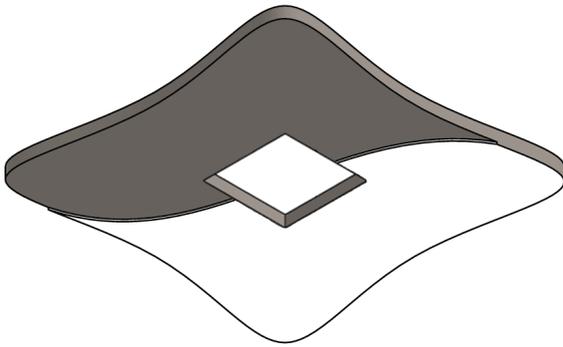

2

Insert the spotlight from below

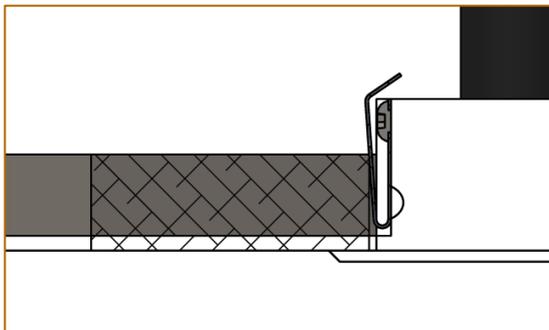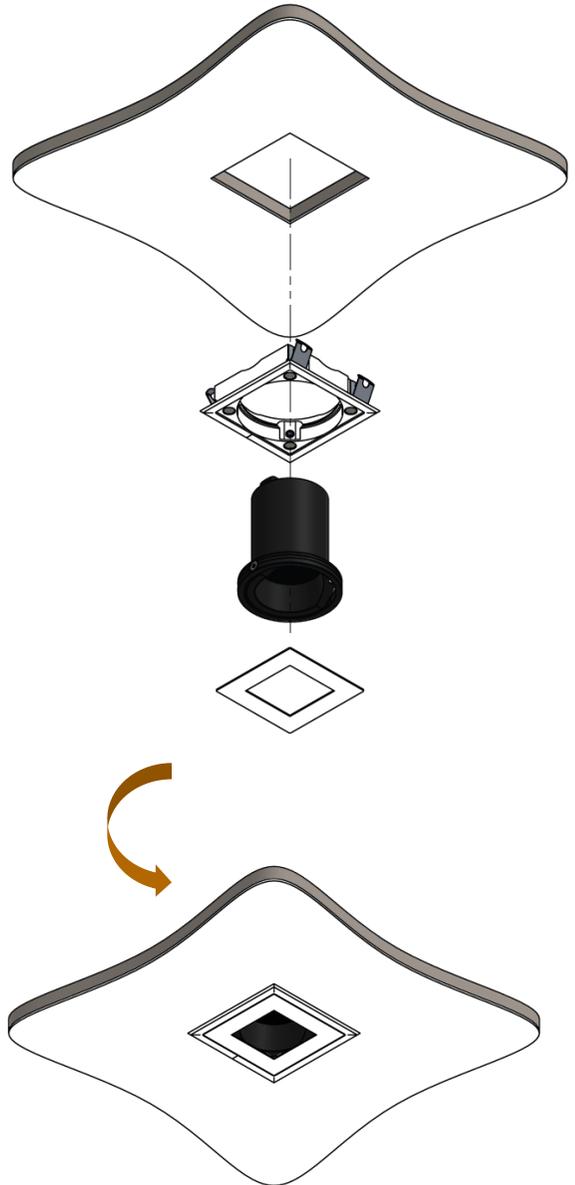

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged


Last update: 2026.02.25

LOUSS

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOUSS


Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE




# LEVANA • C60 & C75 TRIMLESS

## Installation guide

### Installation from above





1  
Install the recessed frame from above and screw it into the surface from below

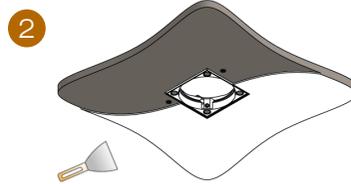


2  
Cover the lateral plates of the recessed frame by coating and painting




3  
Insert the spotlight from below

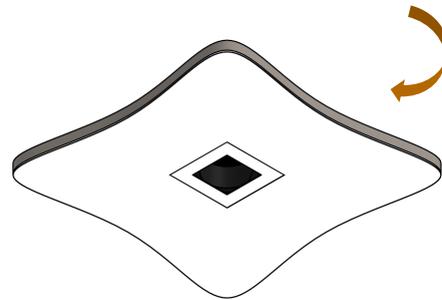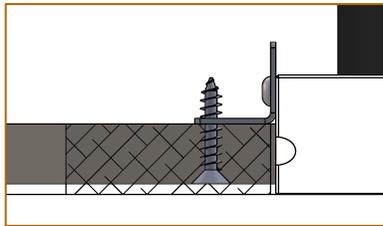


### Installation from below





1  
Install the recessed frame from below and screw it into the surface



2  
Cover the lateral plates of the recessed frame by coating and painting



3  
Insert the spotlight from below

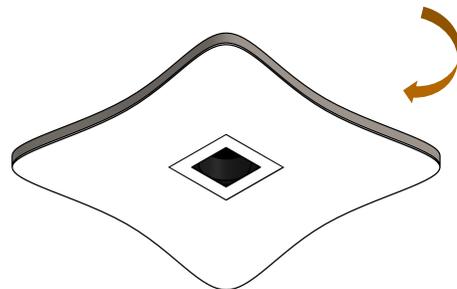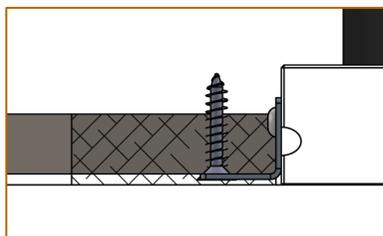

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

LOUSS

Last update: 2026.02.25

10/12

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
www.louss.fr  
Best & LOUSS


Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE






## LEVANA • D70 & D85 TRIM

Installation guide

### 1 Surface finishing

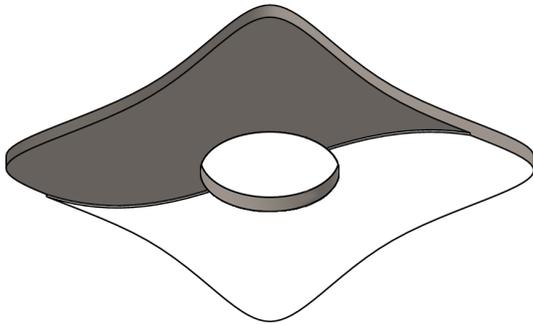

### 2 Insert the spotlight from below

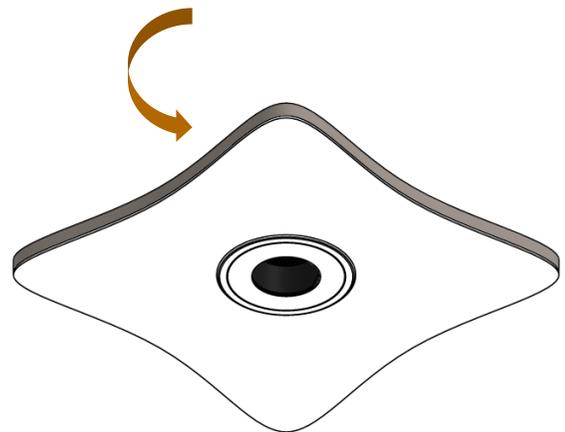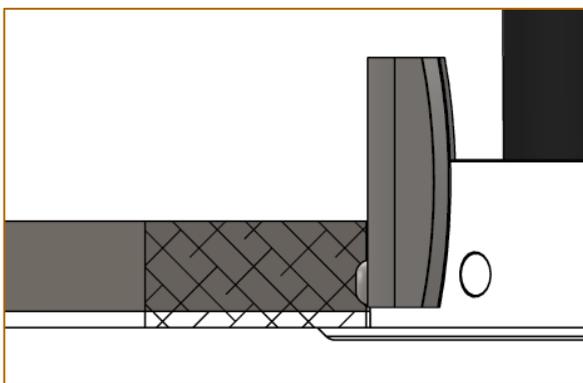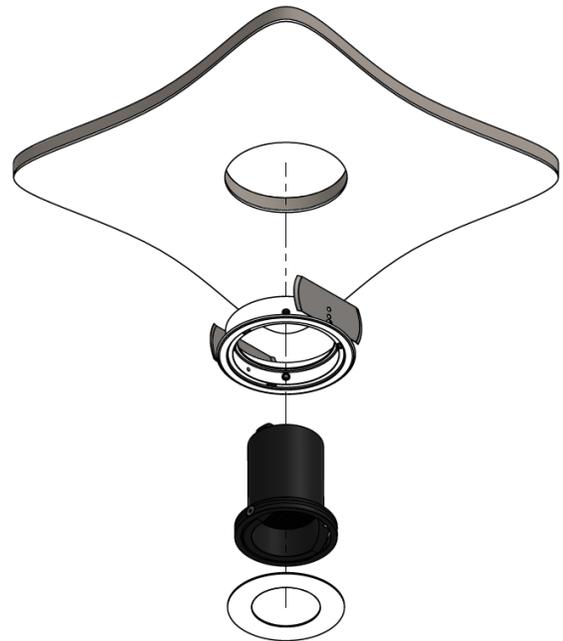


All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged




# LEVANA • D70 & D85 TRIMLESS

## Installation guide

### Installation from above

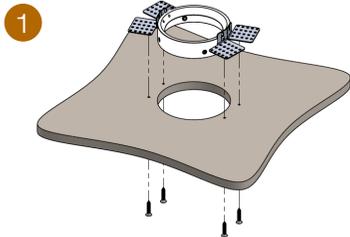



1  
Install the recessed frame from above and screw it into the surface from below




2  
Cover the lateral plates of the recessed frame by coating and painting




3  
Insert the spotlight from below

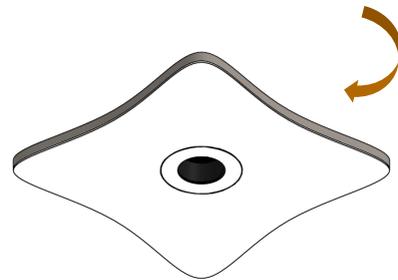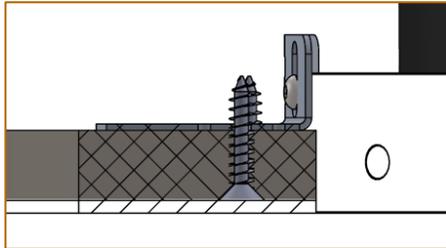

### Installation from below

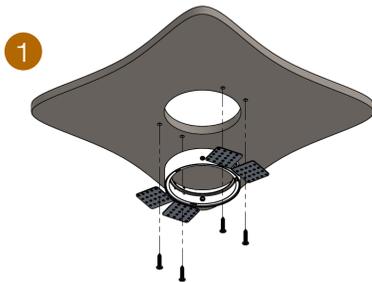



1  
Install the recessed frame from below and screw it into the surface

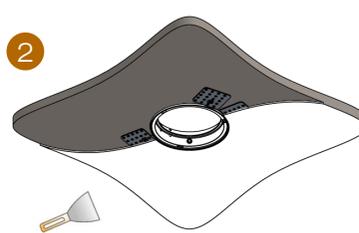

2  
Cover the lateral plates of the recessed frame by coating and painting



3  
Insert the spotlight from below

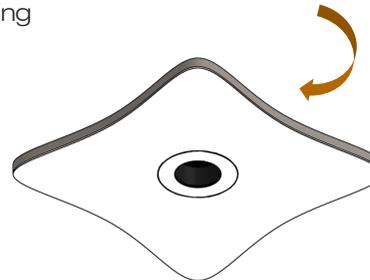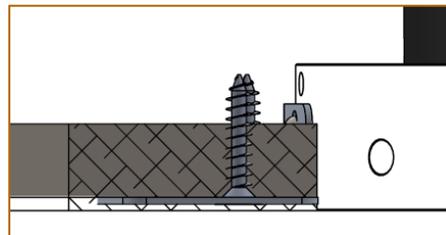

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged