


AURORE D52

Wall-mounted version

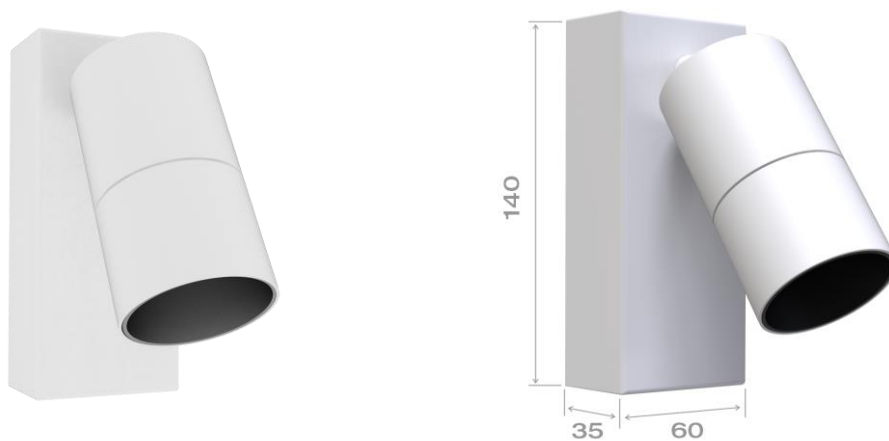

Canon D52
Length 95 <13W
Length 140 <20W

AURORE D52

Wall-mounted version

Range	Highly flexible recessed ceiling downlight for general & accent cardanic lighting
Description	Low luminance LED ENGINE 600 to 2,000 Lm Rotation 360° - Adjustable tilt 90° White finish RAL 9003 (other upon request)
Net weight	0.8 kg
Installation	No specific tools required
LED characteristics	2700K – 3000K – 4000K – 5000K MacAdam ellipse: 3 SDCM (standard version) – 2 SDCM (premium version) CRI: 90 (standard version) – CRI: 95, R9 > 90 (premium version) UGR < 15
Optical beam	7° - 12° - 15° - 25° - 30° - 40° - Elliptic - Special filter upon request
Separate power supply	350mA to 1400mA constant current driver according to version Dimmable driver upon request
LED power	6W to 25W
Connection	Connectors in the box
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

LOuss


Last update : 17/09/2020

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z



Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





AUORE D52

Rectangular Wall-mounted version

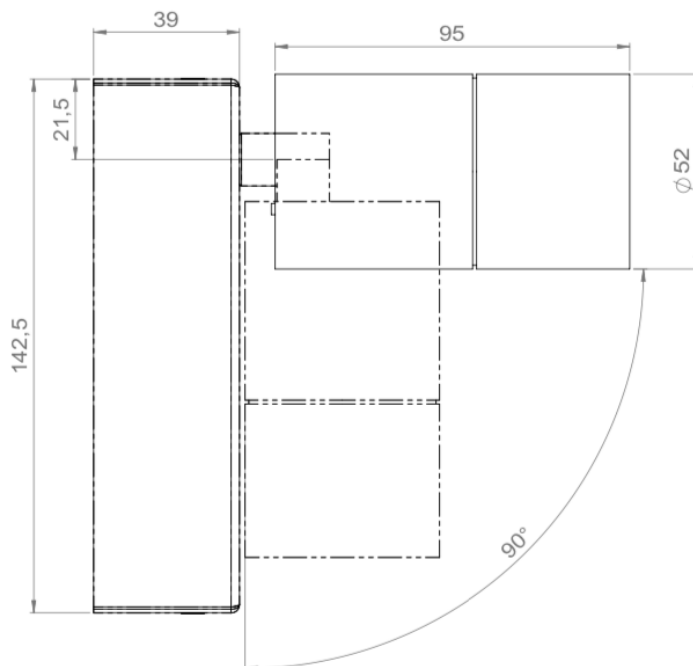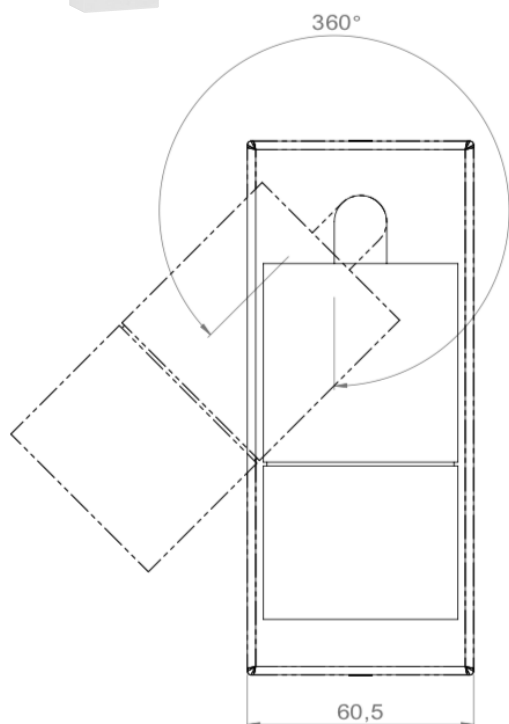

AUORE D52 Rectangular Wall-mounted – Length 95mm ≤ 13W

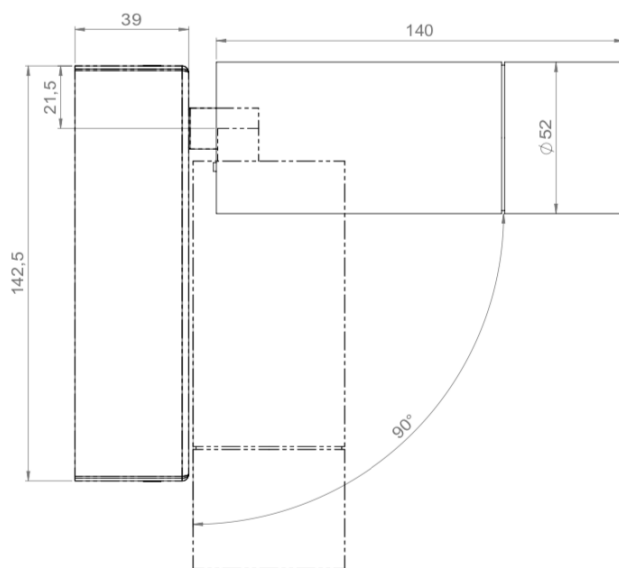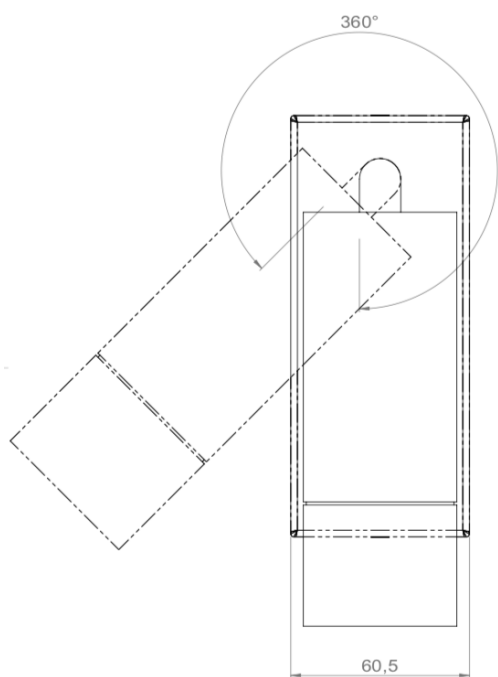

AUORE D52 Rectangular Wall-mounted – Length 140mm ≤ 13W

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Louss


Last update : 23/12/2020

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D52

Rectangular Wall-mounted version

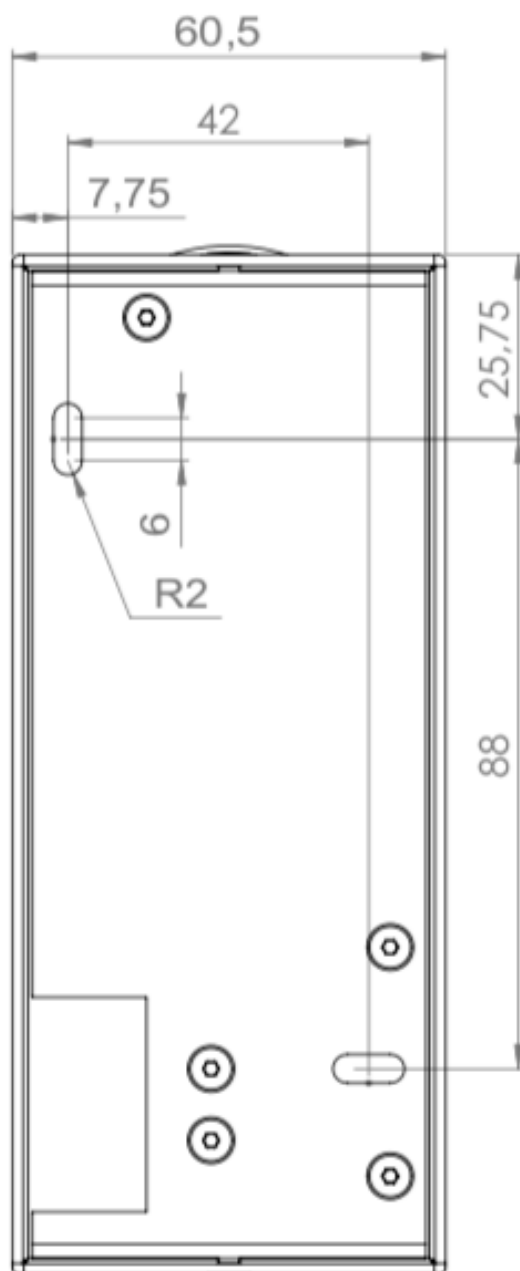

AURORE D52 Rectangular Wall-mounted – Wall-mounted fixing

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

LOUSS

Last update : 23/12/2020

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE