





TRIM

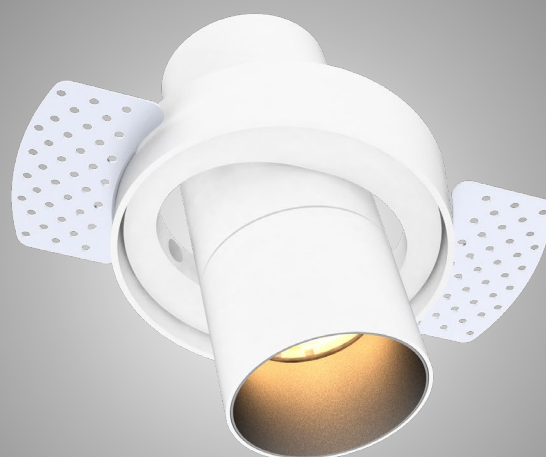


TRIMLESS

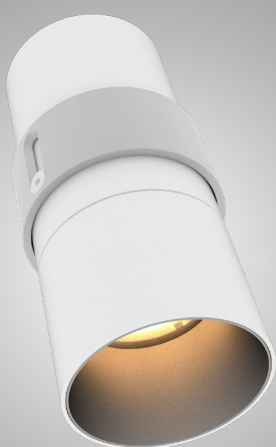

FIXED CANON

AURORE D60 RECESSED





AUORE D60 • TRIM • TRIMLESS • FIXED CANON

Range	Highly adjustable recessed ceiling downlight for general & accent lighting		
Description	Low luminance Rotation 360° Trim & Trimless : Adjustable tilt 30° Fixed Canon : No tilt		
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)		
Dimensions	Trim	Trimless	Fixed Canon
	Spotlight diameter 61mm	Spotlight diameter 61mm	Spotlight diameter 61mm
	External diameter 123mm	Recessed frame diameter 109mm	External diameter 61mm
	Installation diameter 104.5mm	Installation diameter 109mm	Installation diameter 67mm
Net weight	Installation depth 87mm	Installation depth 89mm	Installation depth 81.5 to 101.5mm
	0.450kg	0.450kg	0.4kg
LED characteristics	2700K-3000K-3500K-4000K – 5000K (other upon request) MacAdam ellipse : 3 SDCM (standard) 2 SDCM (premium) CRI : 90 – 95 - 98		
Optical beams	13° - 18° - 24° - 32° (CRI < 98) 7° (CRI 90) UGR < 15		
Accessories	Filters, honeycomb grids upon request		
Luminous flux	600 to 1600 lumen according to version		
Connection	Supplied with 0.5m cable		
Power supply	1.400mA max. constant current driver according to version Dimmable driver upon request For USA & Canada use UL class 2 power supply		
Power	< 20 W according to version		

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Louss

Last update: 2025/06/12

2/6

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





AURORE D60 • TRIM • TRIMLESS • FIXED CANON



Use limitations	The product must be installed in a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span : L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lightning injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in



AURORE D60 TRIM

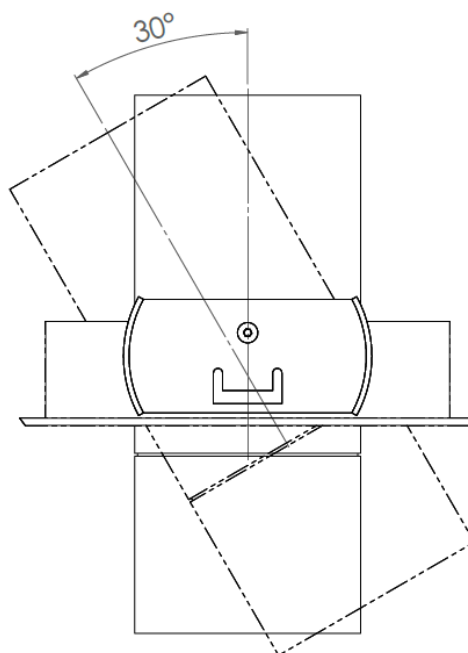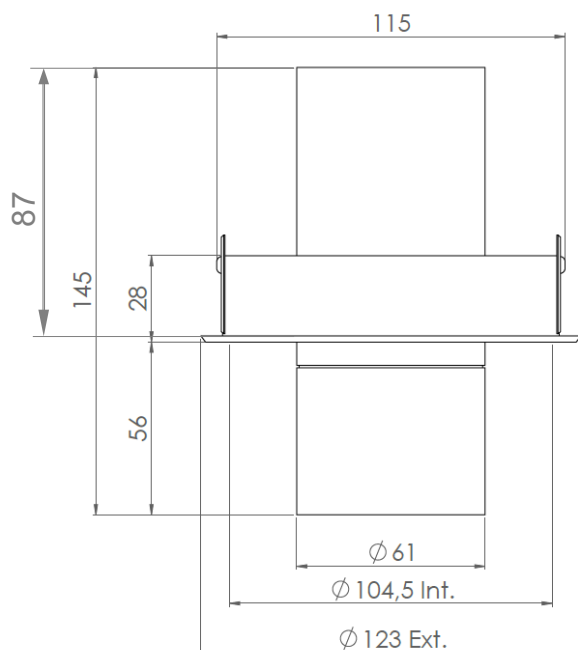

AURORE D60 TRIMLESS

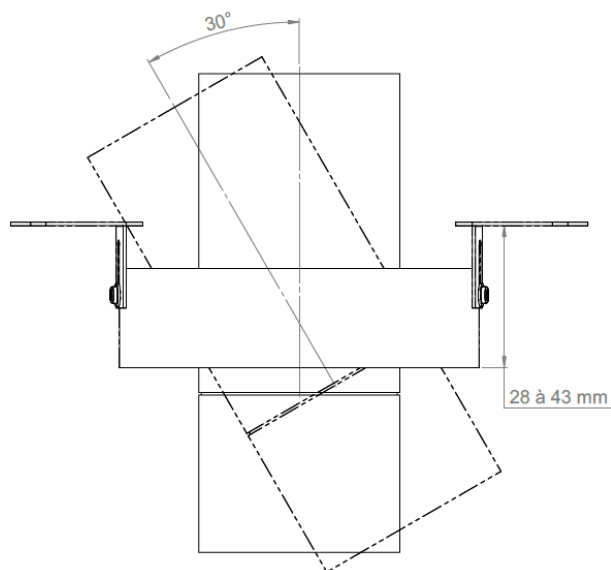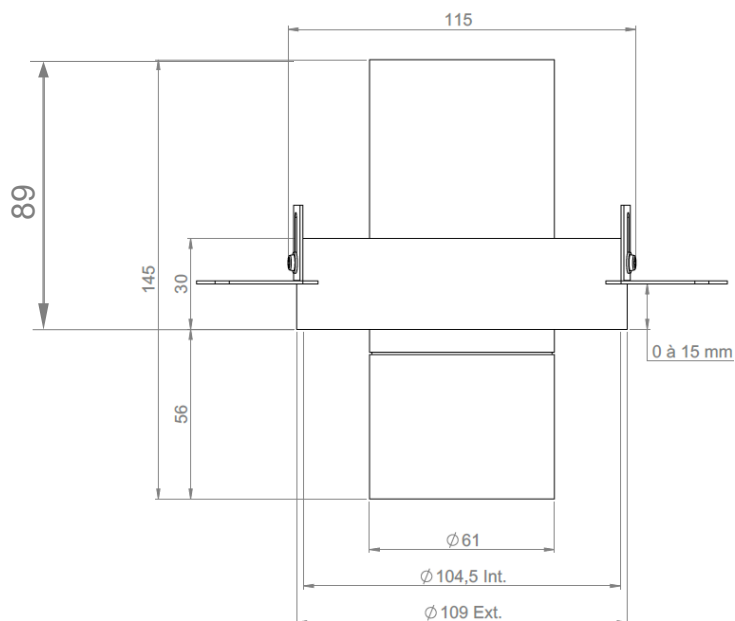

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Louss

Last update: 2025/06/12

Firalux & LOuss brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D60 FIXED CANON

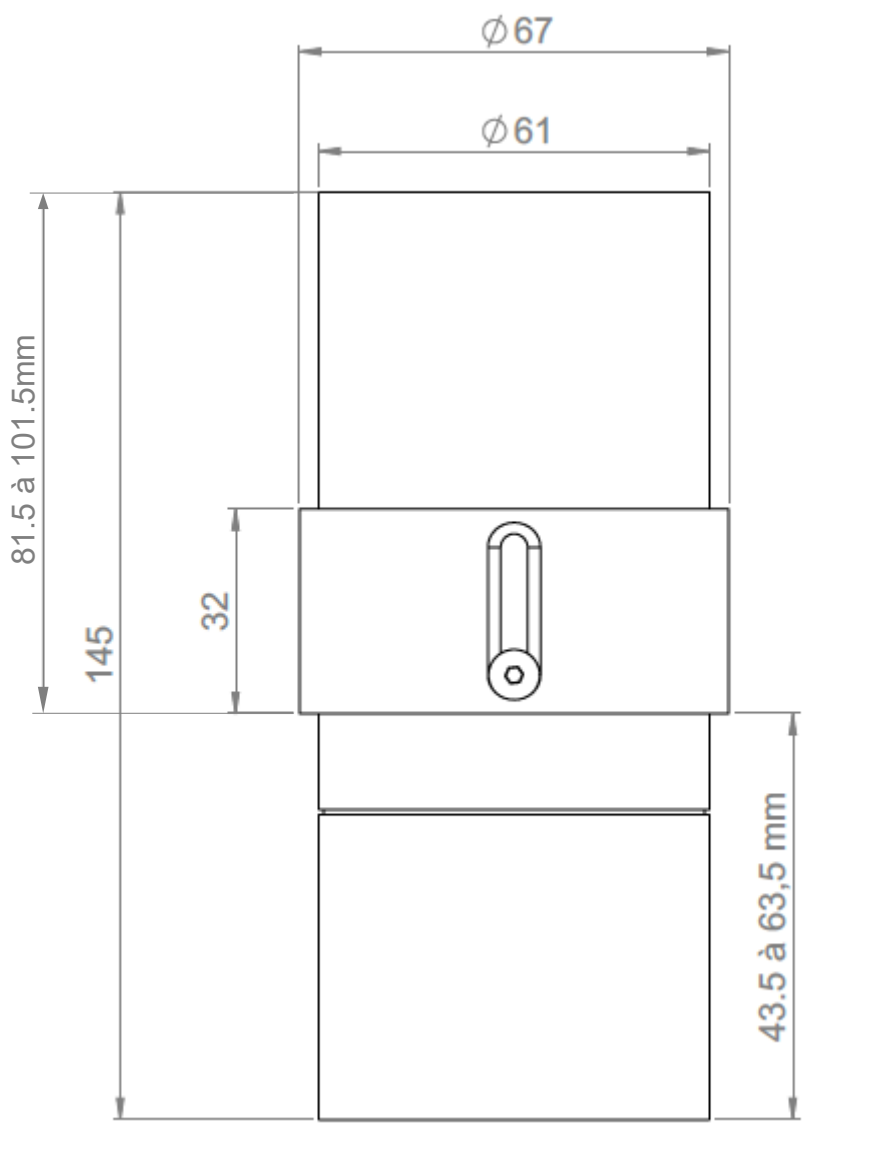

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOUSS

Last update: 2025/06/12

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




AUORE D60 • TRIM • TRIMLESS • FIXED CANON


Installation from above




Install the recessed box from above and screw it into the surface

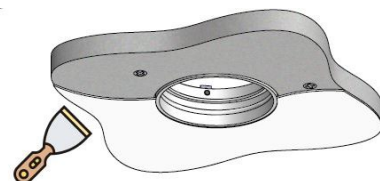


Cover the lateral plates of the recessed box by coating and painting




Insert the spotlight from below

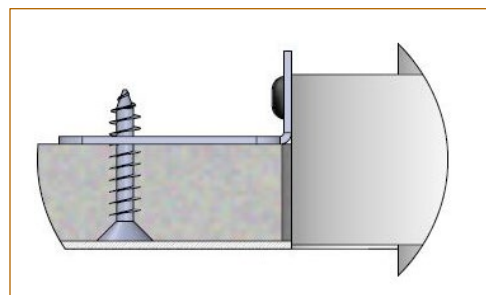


Installation from below




Install the recessed box from below and screw it into the surface

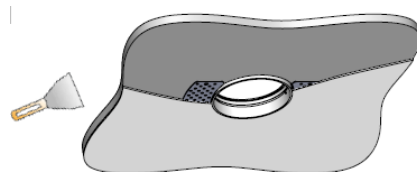

Cover the lateral plates of the recessed box by coating and painting



Insert the spotlight from below

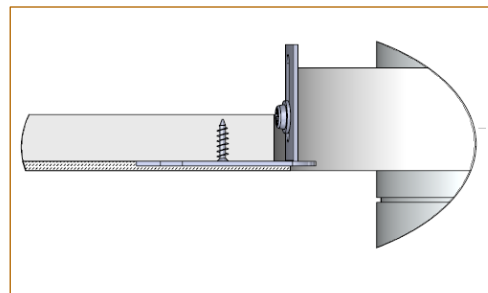

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

Last update: 2025/06/12

Louss

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

6/6

Firalux & LOuss brands