

# LOUSS

Lighting Emotion



SCAPINI S0




SCAPINI S1





SCAPINI S2

**SCAPINI**

*Designed by Benoit LALLOZ*



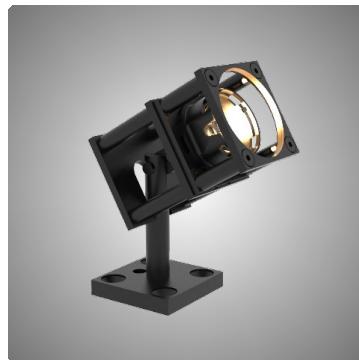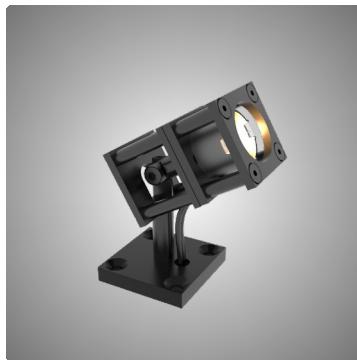

## SCAPINI S0

## SCAPINI S1

## SCAPINI S2

<b>Range</b>	Spotlight for accent lighting Designed by Benoit Laloz		
<b>Description</b>	Black or natural anodized aluminum body Directional bracket		
<b>Dimensions</b>	<b>Scapini S0</b>	<b>Scapini S1</b>	<b>Scapini S2</b>
	Spotlight length : 24mm Spotlight width : 14.2mm Bracket width : 18mm	Spotlight length : 37.6mm Spotlight width : 24mm Bracket width : 24mm	Spotlight length : 90.75mm Spotlight width : 49.5mm Bracket width : 48mm
<b>Net weight</b>	0.012 kg	0.029 kg	0.266 kg
<b>LED characteristics</b>	2700K – 3000K – 4000K (other upon request)		
<b>Optical beams</b>	15° - 25° - 30° - 40° - 50° - 60° - 80° (other upon request)		
<b>Connection</b>	Supplied with 0.5m cable (more length upon request) Individual or series connection on external driver		
<b>Power supply</b>	External constant current driver 500mA max. For the US & Canada, use UL class 2 driver		
<b>Power</b>	<b>Scapini S0 / Scapini S1</b>		<b>Scapini S2</b>
	350mA : 1.2W 500mA : 1.8W		350mA : 4.8W 500mA : 7.2W
<b>Use limitations</b>	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOUSS, must be approved before use		
<b>Warranty</b>	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labor warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in		


All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged.

Last update : 2025.07.01


2/3




## SCAPINI SO

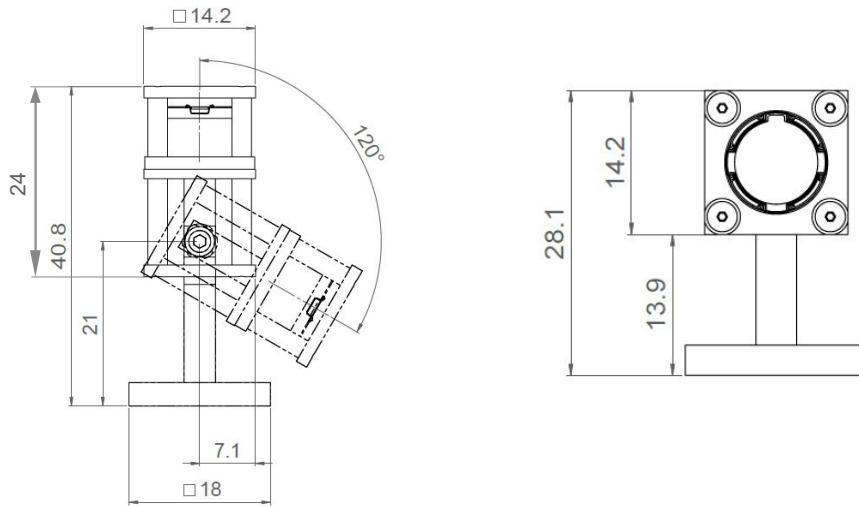

## SCAPINI S1

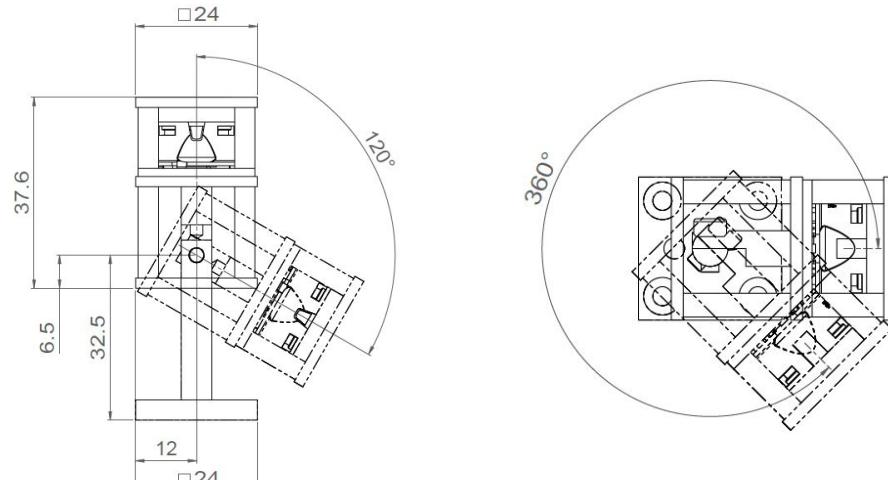

## SCAPINI S2

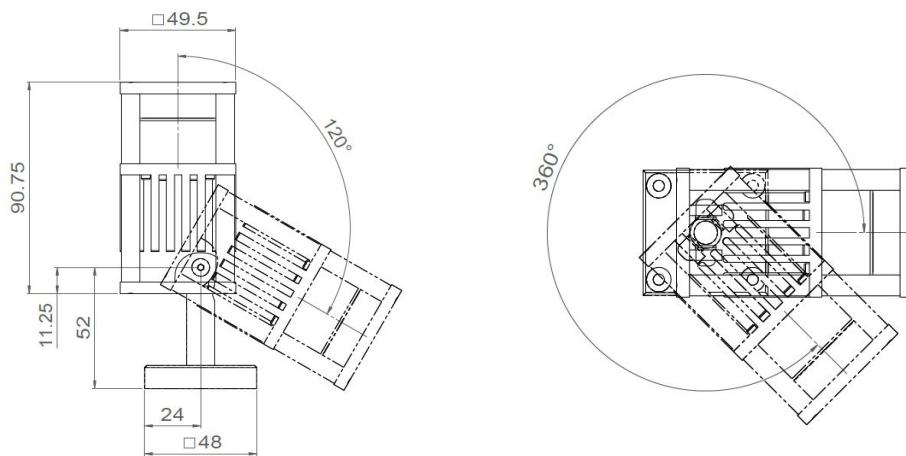

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged.

Last update : 2025.07.01

3/3

**LOUSS**

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOUSS

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE