




AURORE D75 RECESSED





AUORE D75 • Trimless • Trimless Wall-Washer • Trimless Flush

Range	Highly adjustable recessed ceiling downlight for general & accent lighting		
Description	Low luminance Rotation 360° Trimless : Adjustable tilt 30° Trimless Wall-Washer : Adjustable tilt 35° Trimless Flush : Adjustable tilt 20°		
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)		
Dimensions	Trimless	Trimless Wall Washer	Trimless Flush
	Spotlight diameter 75mm	Spotlight diameter 75mm	Spotlight diameter 75mm
	Recessed frame diameter 118mm	Recessed frame diameter 118mm	Recessed frame diameter 135mm
	Installation diameter 118mm	Installation diameter 118mm	Installation diameter 135mm
	Installation depth 46mm	Installation depth 46mm	Installation depth 100mm
Net weight	0.5 kg		
LED characteristics	2700K – 3000K – 3500K - 4000K (other upon request) CRI 90 R9 >50 CRI 95 R9 >80 CRI 97 R9 >90		
Optical beams	6° - 12° - 15° -20° - 25° - 30° - 35° - 40° - 60° - Elliptical UGR < 15		
Accessories	Filters, honeycomb grids upon request		
Luminous flux	600 to 2,000 lumen according to version		
Connection	Supplied with 0.5m cable		
Power supply	1.400mA max. constant current driver according to version Dimmable driver upon request For USA & Canada use UL class 2 power supply		
Power	6W to 25W according to version		

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged





AURORE D75 • Trimless • Trimless Wall-Washer • Trimless Flush

Use limitations	The product must be installed in a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span : L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lightning injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in



All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged



AURORE D75 TRIMLESS

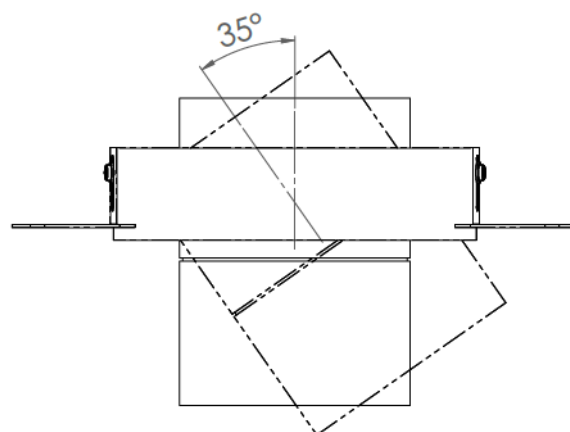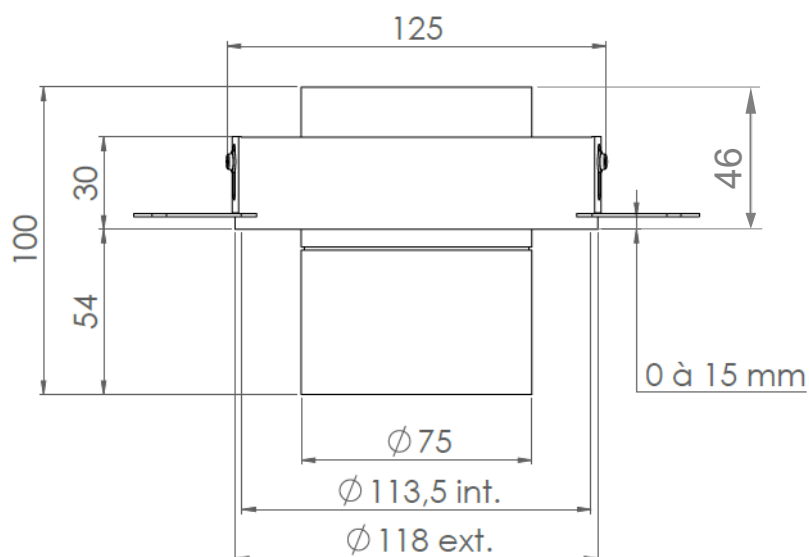

AURORE D75 TRIMLESS WALL WASHER

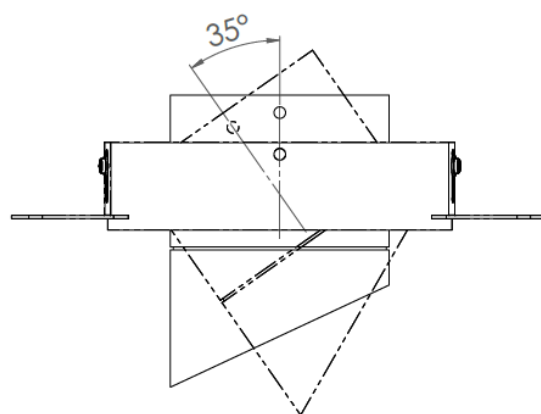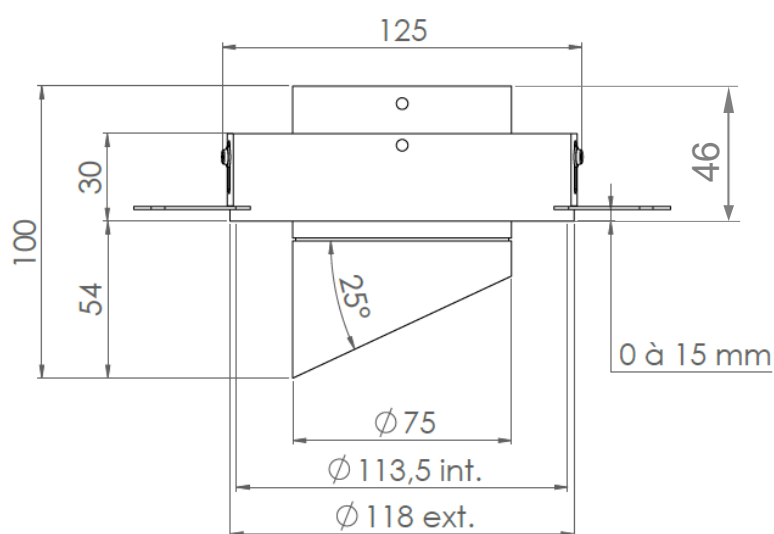

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Louss

Last update: 2025/06/12

Firalux & LOuss brands



SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





AURORE D75 TRIMLESS FLUSH

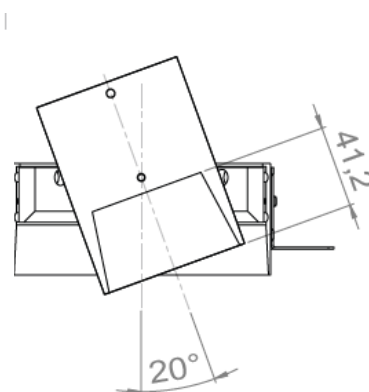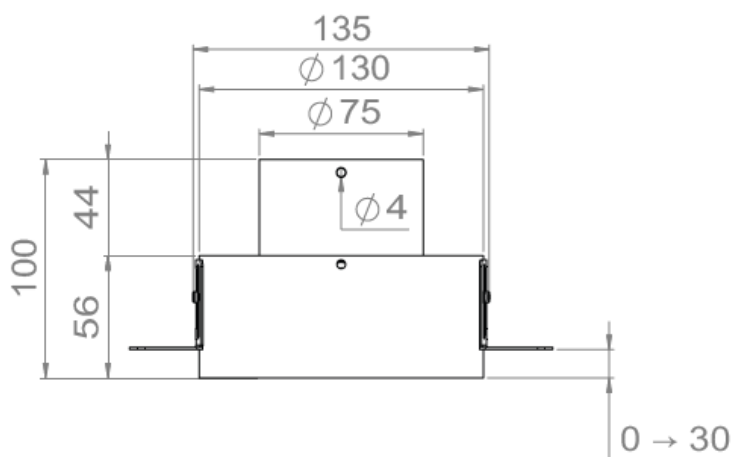

Upper position

Insert the luminaire into the **upper position** of the recessed frame to obtain a **flush** luminaire

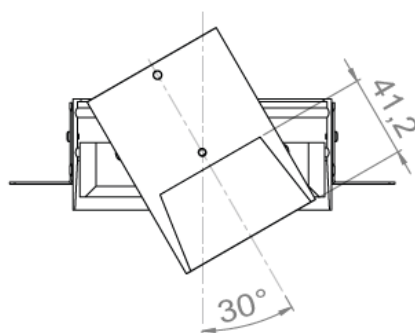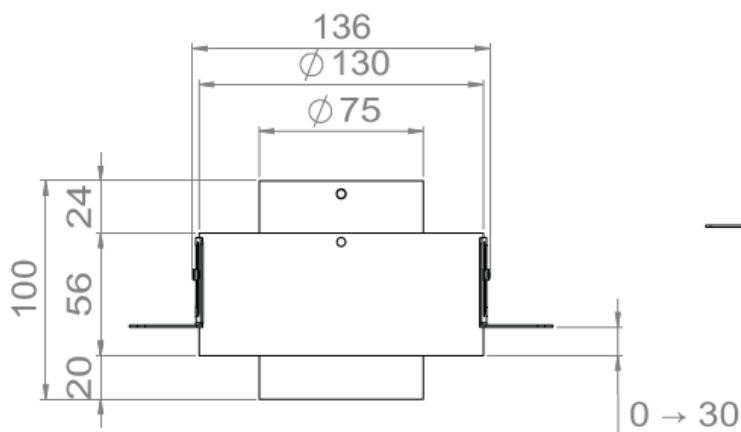

Low position

To obtain **30° orientation** angle, insert the luminaire in the **lowest position**

WARNING :
in this position, the spotlight cannot flush with the ceiling

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

lOuss

Last update: 2025/06/12

5/6

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




AUORE D75 •Trimless •Trimless Wall-Washer • Trimless Flush


Installation from above




Install the recessed box from above and screw it into the surface

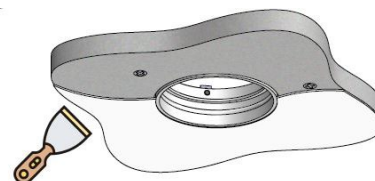


Cover the lateral plates of the recessed box by coating and painting




Insert the spotlight from below

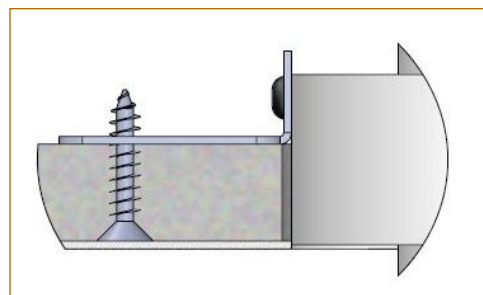


Installation from below




Install the recessed box from below and screw it into the surface

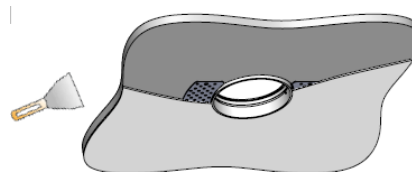

Cover the lateral plates of the recessed box by coating and painting



Insert the spotlight from below

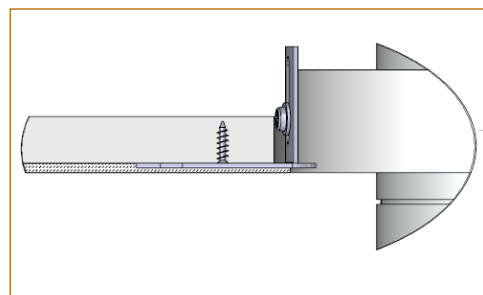

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

Last update: 2025/06/12

Louss

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE