



MINI7 UP







MINI7 UP




Range	Linear LED light					
Description	<p>Natural anodized aluminum profile LED strip Opal diffuser 2 natural anodized aluminum end caps (thickness 1.5mm) Metallic fixing clips :<ul style="list-style-type: none">• standard flat fixing clips• brackets• round fixing clips for orientation of the linear LED light</p>					
Dimensions	<p>Width : 17mm (standard fixing clips) Height : 20mm (standard fixing clips) 32mm (brackets) 26.2mm (round fixing clips) Length upon request up to 2,500mm</p>					
LED characteristics	<p>2700K – 3000K – 3500K – 4000K CRI 90 R9 > 50</p>					
Separate power supply	<p>24V constant voltage For the US & Canada use a remote UL class 2 power supply</p>					
LED strip	Color Temperature	LED Power W/m Lumen/m			Cut-out size	LED/m
FIRALED 160cc (other upon request)	2700K	9.60 1,230 lm	14.40 1,825 lm	18.00 2,270 lm	50mm	160
	3000K	9.60 1,290 lm	14.40 1,916 lm	18.00 2,385 lm	50mm	160
	3500K	9.60	14.40	18.00	50mm	160
	4000K	9.60	14.40	18.00	50mm	160
Connection	<p>5m maximum per driver's output Delivered according to customer's requirement with :<ul style="list-style-type: none">• A male and a female connector for daisy-chain cabling• 1m cable + female quick connector• Several lengths forming a garland</p>					
Accessories	<p>Connector board Y extension cables</p>					
Use Limitations	<p>The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use</p>					
Warranty	<p>Life span: L80-B10 = 35,000 hours (80% remaining flux) at 30°C ambient temperature The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and receive a functional burn-in</p>					

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

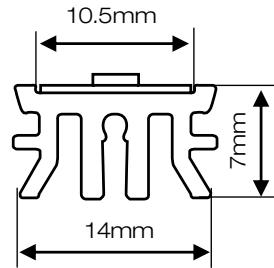

MINI7 UP




Standard version with flat fixing clips

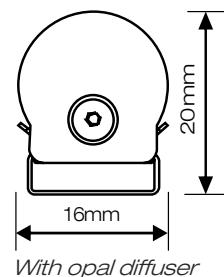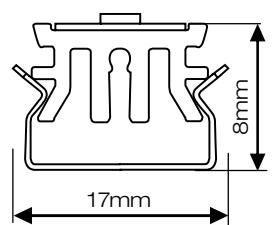


Cable's output on 1 end, both ends for daisy chain or below, with quick connector(s)

With opal diffuser




Fixing brackets version

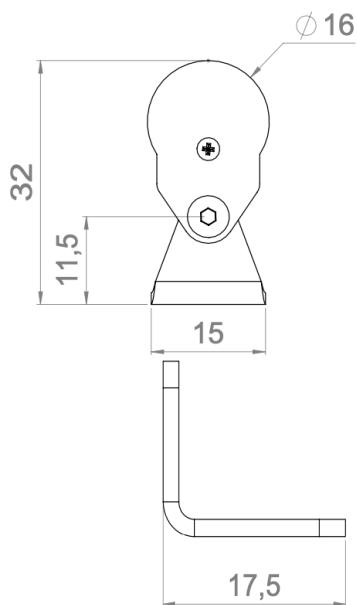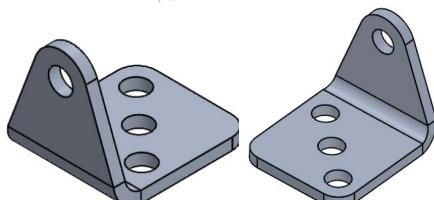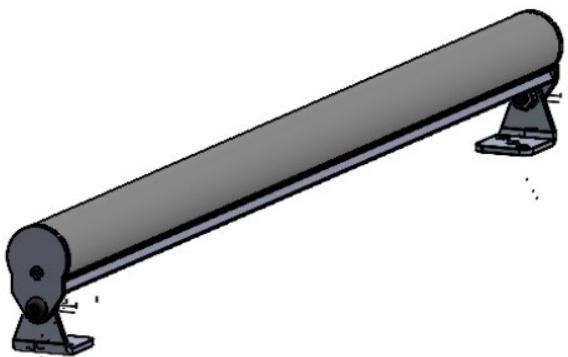


Cable's output on 1 end, both ends for daisy chain or below, with quick connector(s)

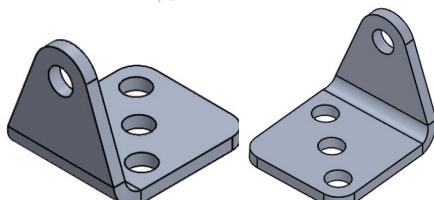

Round fixing clips version

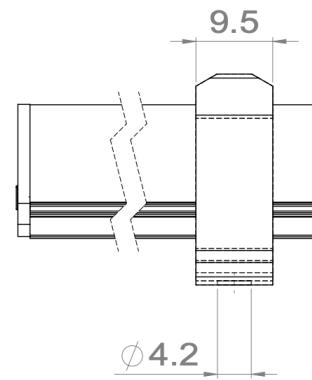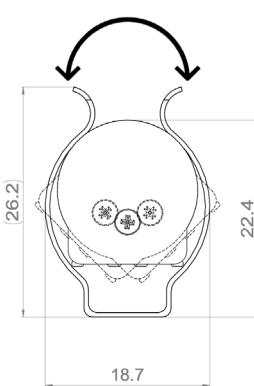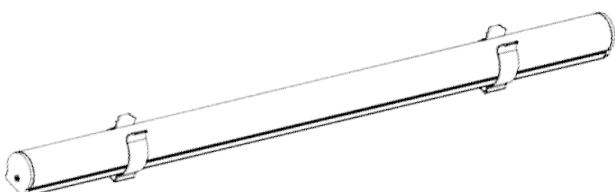


All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

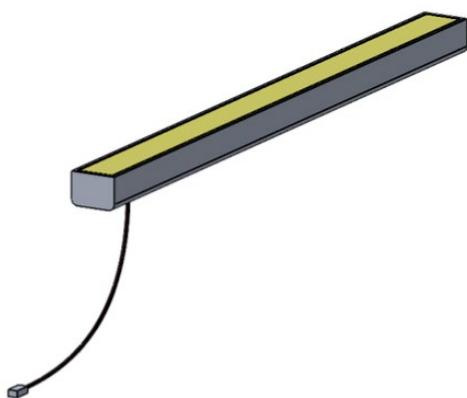


Cable below

110mm or 250mm cable + male quick connector on 1 end
or
1m cable + male quick connector on 1 end

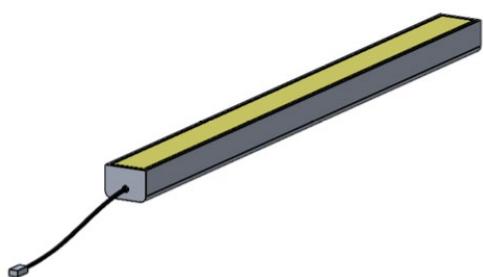


Cable on 1 end

110mm or 250mm cable + male quick connector on 1 end
or
1m cable + male quick connector on 1 end

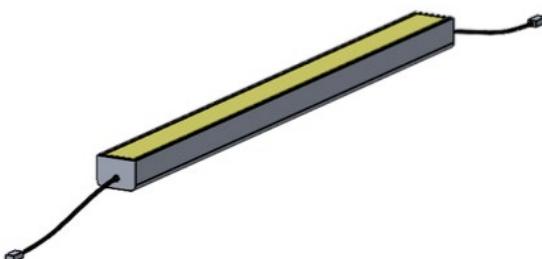

Daisy chain

110mm or 250mm cable + male quick connector on 1 end
+
110mm or 250mm cable + female quick connector on the other end

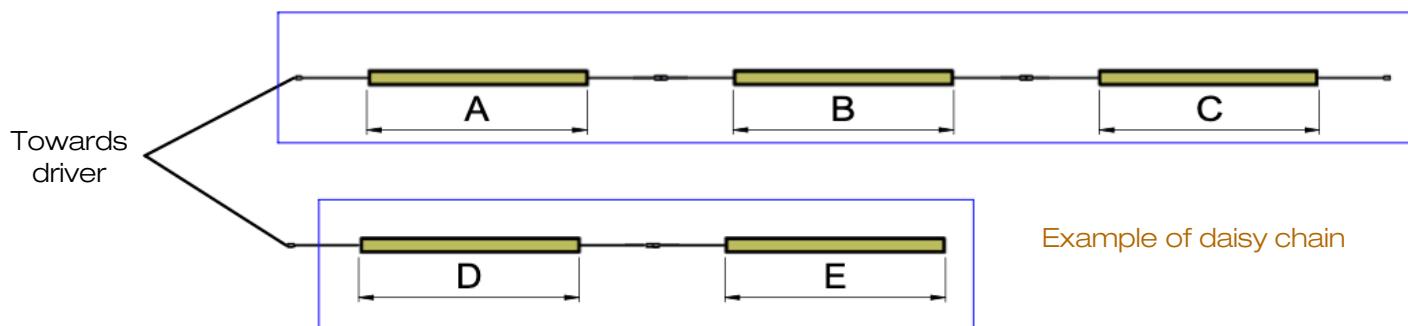

Example of daisy chain

Create as many lines as needed to respect the maximum length per line,
according to the selected LED strip and the wattage of the driver

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.