





MICROFILED

The miniature spotlight





SIMPLE MICROFILED



LOW LUMINANCE MICROFILED

MICROFILED

Gamme	Recessed spotlight for accent lighting
Description	Matt finish black anodized aluminium Supplied in standard or low luminance version
Dimensions	Installation diameter : 13mm standard version, 15mm low luminance version Length: 19mm standard version, 25mm low luminance version
Net Weight	0.20 kg
LED characteristics	1 LED : 2700K - 3000K - 3500K - 4000K - 5000K MacAdam ellipse : 3SDCM CRI : 92 R9>80
Optical beam	16° - 20° - 40° - 65° - 17°x49°
Connection	Delivered with 0.5m standard cable Individual connection or connection in series on external constant current driver Optional : Easy plug system (25cm cable + male & female quick connectors)
Separate power supply	≤ 500mA constant current driver
LED power	1.7W to 500mA max
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

2/4

LOuss

Last update : 18/02/2021

Firalux & LOuss brands



SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

SIMPLE MICROFILED



LOW LUMINANCE MICROFILED

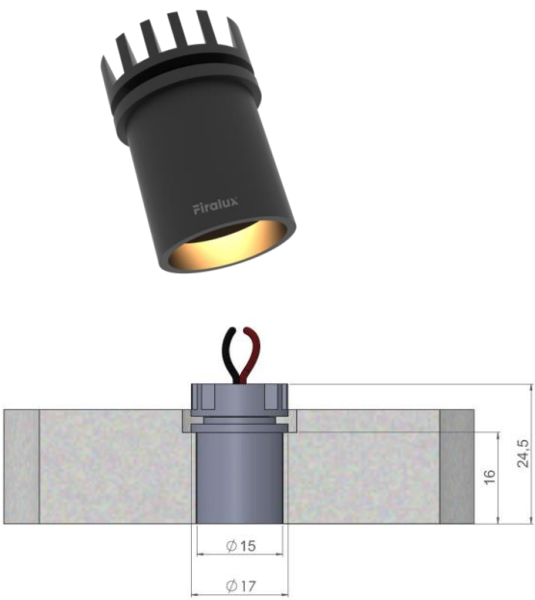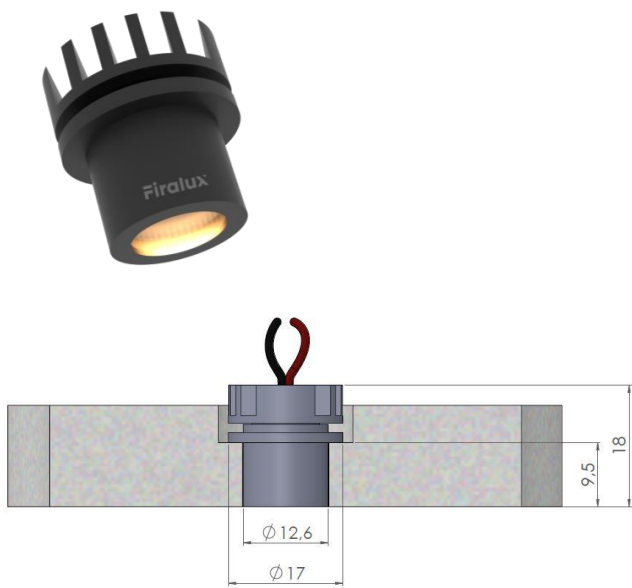

Installation from above

SIMPLE MICROFILED
MAGNETIC

LOW LUMINANCE MICROFILED
MAGNETIC

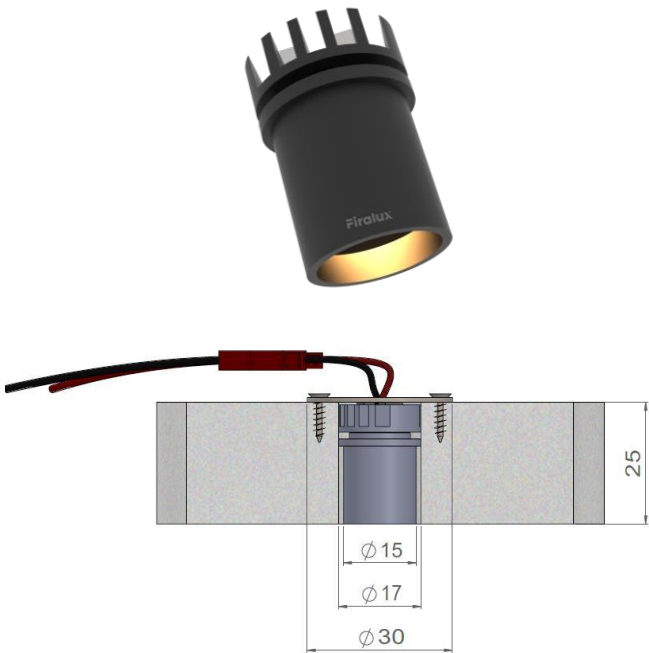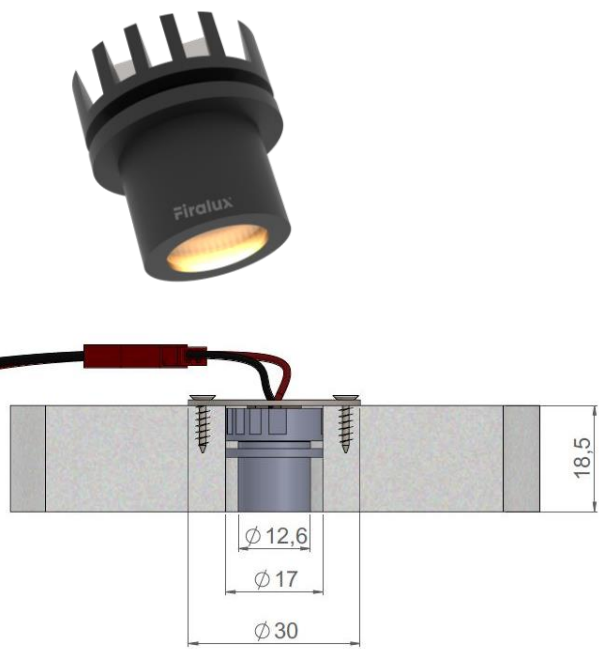

Installation from below



LOW LUMINANCE MICROFILED

Magnetic version

Installation principle from below

