



# LOUSS

Lighting Emotion



## MYSTA PLUG

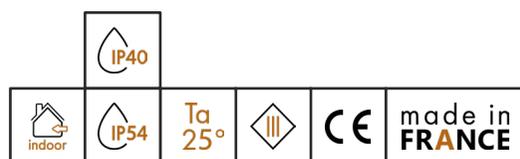



## MYSTA PLUG

<b>Range</b>	Adjustable low luminance recessed spotlight for general & accent lighting			
<b>Description</b>	Rotation 360° - Adjustable tilt 90° Easily changeable LED, optics & accessories on site, without any tool, with integrated Louss <b>Permuto</b> easy swap system (see page 4)			
<b>Finish</b>	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)			
<b>Dimensions</b>	Spotlight diameter : 46mm Spotlight length : 64mm (spotlight only) 79mm (with fixing device) Installation diameter : 24mm Installation depth : 29.5mm			
<b>Net weight</b>	± 0.150g according to version			
<b>LED characteristics</b>	2700K – 3000K – 3500K – 4000K – 5000K (other upon request) MacAdam ellipse : 3 SDCM (standard version) – 2 SDCM (premium version) CRI 90 (standard version) – CRI 95, R9>80 (premium version)			
<b>Optical beams &amp; Performances</b>	<b>Beam</b>	<b>Candela</b>	<b>Power</b>	<b>Photometry</b>
	11°	10,900 cd (3000K)	7W	les 2591A
	16°	6,300 cd (3500K)	8W	les 2645A
	20°	4,400 cd (3500K)	7W	les 2510A
	23°	3,100cd (3500K)	7W	les 2511A
	34°	1,700cd (3500K)	8W	les 2617A
	43°	1,050 cd (3500K)	7W	les 2513A
	Other beams upon request 300 to 800 lumen UGR < 15			
<b>Accessories</b>	Filters, honeycomb grid upon request			
<b>Connection</b>	Supplied with 0.5m cable (more length upon request)			
<b>Separate power supply</b>	700mA max. external constant current driver Dimmable driver upon request For the US & Canada use a UL class 2 driver			
<b>Consommation</b>	4W to 9W max. according to version			

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.03.18

Louss

2/6

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOUSS

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE



## MYSTA PLUG

<b>Use limitations</b>	<p>The product must be installed into a ventilated area</p> <p>Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees</p> <p>The drivers, if not delivered by LOuss, must be approved before use</p>
<b>Warranty</b>	<p>Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature.</p> <p>3-year parts and labor warranty</p> <p>The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product</p> <p>All products are electrically tested and received a functional burn-in</p>

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.03.18

LOuss

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOuss

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE



## MYSTA PLUG

### LOuss **Permuto** – Easy Swap System



All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.03.18

LOuss


BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOuss

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE



## MYSTA Plug Dimensions

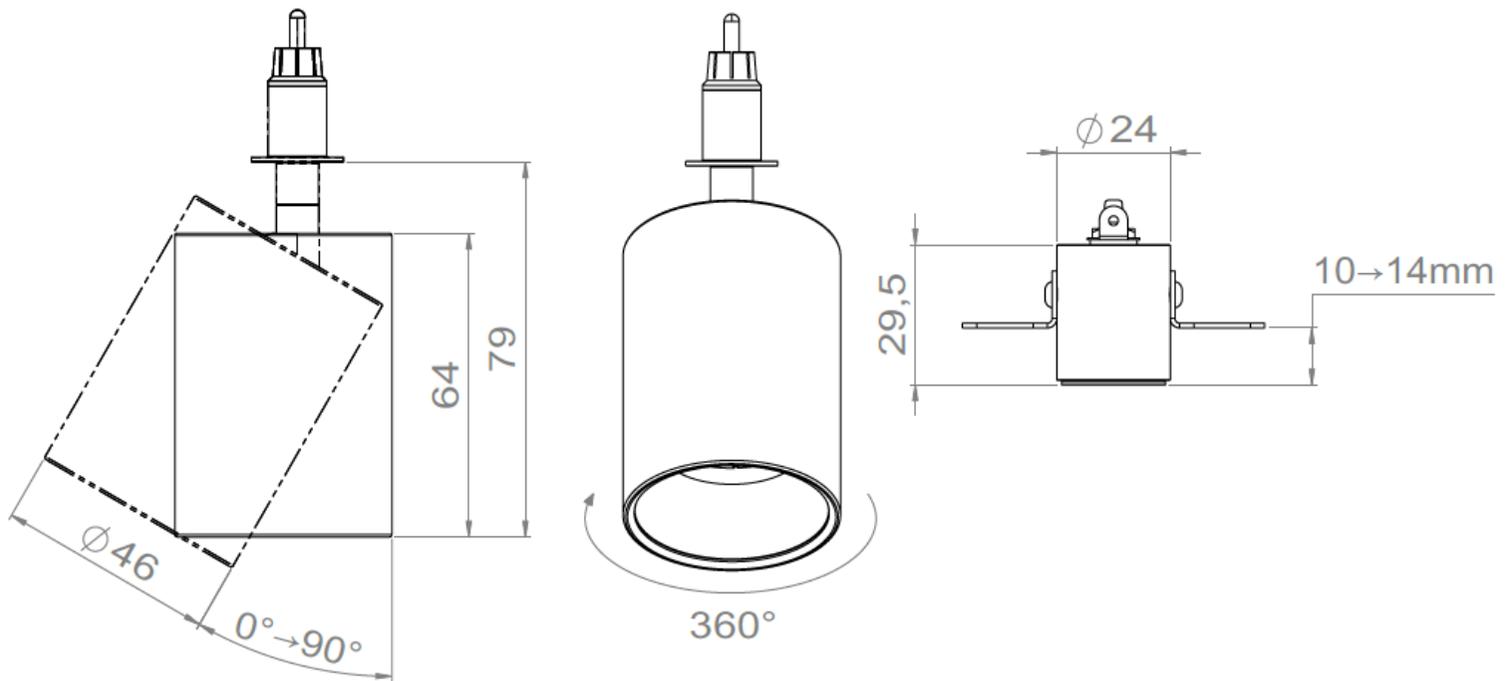

### After installation



All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.03.18

LOUSS

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z


Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOUSS

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE




## MYSTA Plug Installation guide

### Installation from above




Install the recessed box from above  
and screw it into the surface

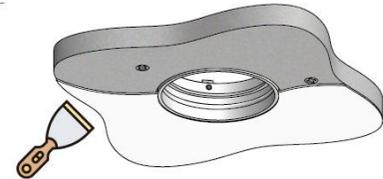


Cover the lateral plates of the recessed box  
by coating and painting




Insert the spotlight from below

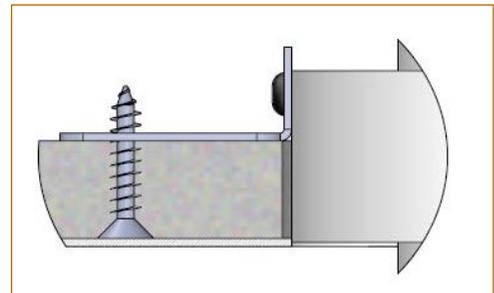


### Installation from below




Install the recessed box from below  
and screw it into the surface

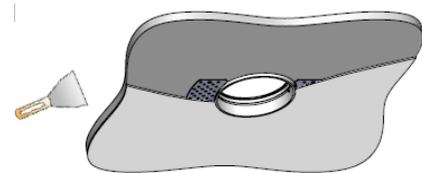

Cover the lateral plates of the recessed box  
by coating and painting



Insert the spotlight from below

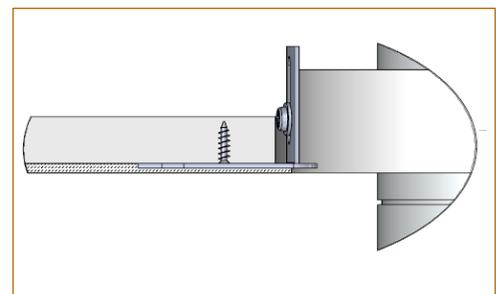

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.03.18

LOUSS

BEST SAS, Capital 200 000€  
RCS Dijon B 408 483 485  
TVA/VAT n° : FR94 408 483 485  
APE 2612Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best & LOUSS

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE