

LOUSS

Lighting Emotion



MYSTA PLUG



Mysta Plug • Mysta Plug-B • Mysta Plug-S • Mysta Plug-SB

Range	Adjustable low luminance recessed spotlight for general & accent lighting	
Description	Rotation 360° - Adjustable tilt 90°	
	Plug	Plug-B
	Optional : Easily changeable LED, optics and accessories on site, without any tool, with integrated Easy Swap system (see page 4)	To be installed in a concrete surface Optional : Easily changeable LED, optics and accessories on site, without any tool, with integrated Easy Swap system (see page 4)
	Plug-S	Plug-SB
	Without Easy Swap system	To be installed in a concrete surface Without Easy Swap system
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)	
Dimensions	Plug	Plug-B
	Spotlight diameter : 46.0mm Spotlight length : 64.0mm Installation diameter : 24.0mm Installation depth : 29.5mm	Spotlight diameter : 46.0mm Spotlight length : 64.0mm Installation diameter : 31.0mm Installation depth : 39.0mm
	Plug-S	Plug-SB
	Spotlight diameter : 35.0mm Spotlight length : 49.5mm Installation diameter : 24.0mm Installation depth : 29.5mm	Spotlight diameter : 35.0mm Spotlight length : 49.5mm Installation diameter : 31.0mm Installation depth : 39.0mm
Net weight	± 0.150g according to version	
LED characteristics	2700K – 3000K – 3500K – 4000K – 5000K (other upon request) MacAdam ellipse : 3 SDCM (standard version) – 2 SDCM (premium version) CRI 90 (standard version) – CRI 95, R9>80 (premium version)	
Accessories	Filters, honeycomb grid upon request	

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.04.08



Mysta Plug • Mysta Plug-B • Mysta Plug-S • Mysta Plug-SB

Optical beams & Performances Plug & Plug-B	Beam	Candela	Power	Photometry
	11°	10,900 cd (3000K)	7W	les 2591A
	16°	6,300 cd (3500K)	8W	les 2645A
	20°	4,400 cd (3500K)	7W	les 2510A
	23°	3,100cd (3500K)	7W	les 2511A
	34°	1,700cd (3500K)	8W	les 2617A
	43°	1,050 cd (3500K)	7W	les 2513A
	Other beams upon request 300 to 800 lumen UGR < 15			
Optical beams & Performances Plug-S & Plug-SB	15° - 25° - 35° 150 to 400 lumen UGR < 15			
Connection	Supplied with 0.5m cable (more length upon request)			
Separate power supply	700mA max. external constant current driver Dimmable driver upon request For the US & Canada use a UL class 2 driver			
Consommation	Plug • Plug-B		Plug-S • Plug-SB	
	4W à 9W max. according to version		3W ou 4W max. according to version	
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use			
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labor warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in			

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.04.08

LOuss

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

3/6



MYSTA • Plug • Plug-B

Easy Swap System



All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.04.08

LOUSS




BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOUSS

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



MYSTA Plug • Plug-B Dimensions

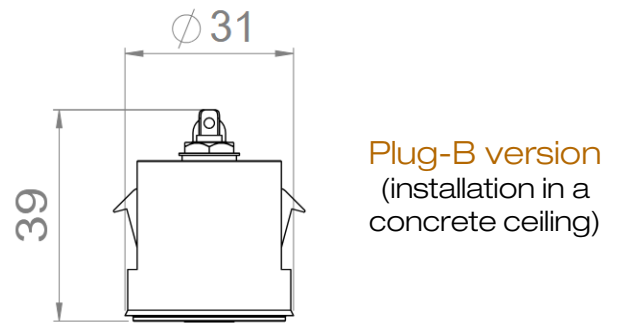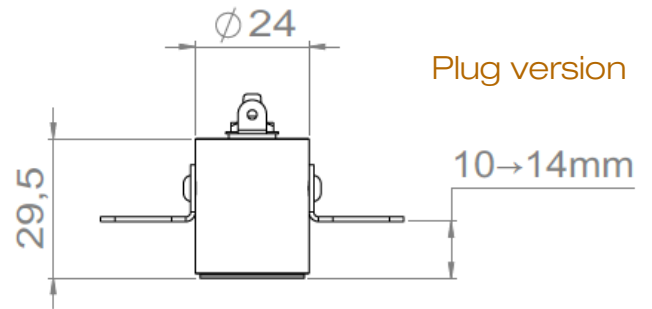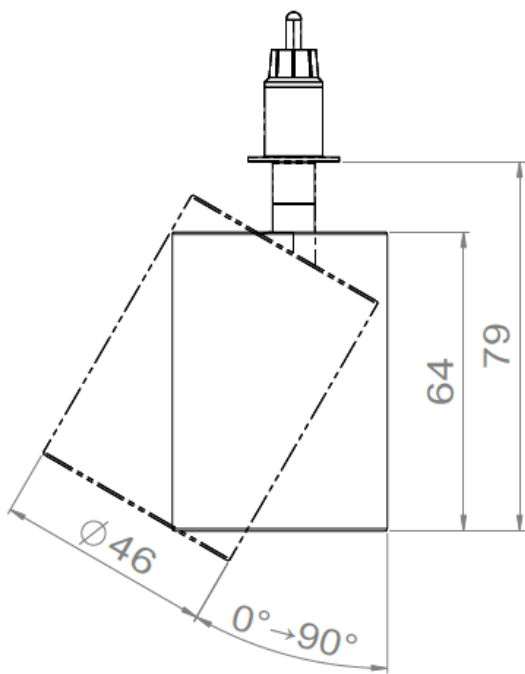

After installation

Plug version



Plug-B version



All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.04.08

LOUSS


BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOUSS

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



MYSTA Plug-S • Plug-SB Dimensions

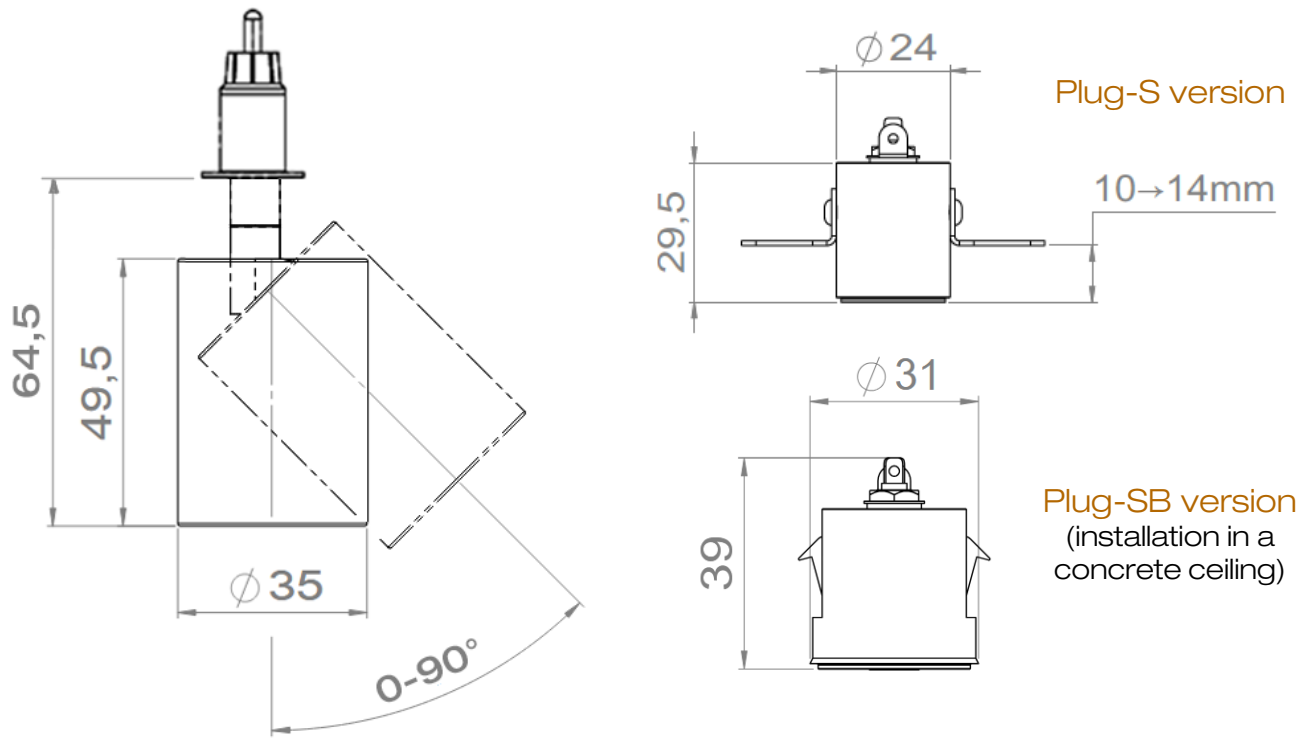

After installation

Plug-S version



Plug-SB version



All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Creation : 2025.04.08 / Last update : 2026.04.08

LOUSS

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOUSS

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE