




Standard





Low Luminance



ROLLED SPIKE

The garden lighting specialist

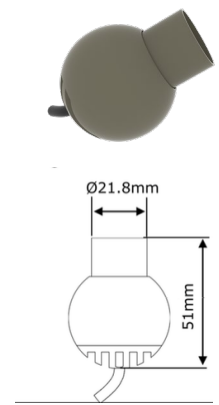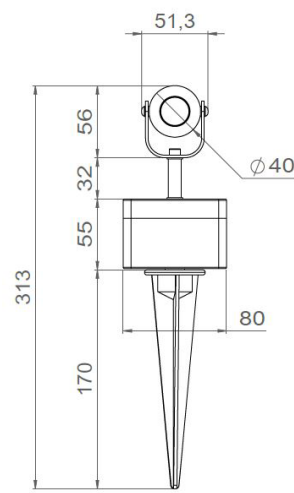

Low Luminance version

ROLLED SPIKE • Standard • Low Luminance

Range	Garden & outdoor multi-purpose floodlighting	
Description	1 LED or 3 LEDs floodlighting Rotary ball on bracket Supplied in Standard version or with a Low Luminance tube Waterproof junction box and connectors Ground rod	
Finish	Khaki RAL 7013 (other upon request)	
Dimensions	Spotlight	Junction box & Ground rod
	Diameter : 40mm Length : 51mm (Low Luminance) Width : 51.3mm (bracket included) Height : 88mm	Rod height : 170mm Junction box length : 80mm Junction box height : 55mm
LED characteristics	1 LED or 3 LEDs : 2700K – 3000K – 4000K – 5000K (other upon request) CRI 80	
Optical beams	Intensive – Semi intensive – Extensive – Elliptical	
Connection	Supplied with 1m cable (more length upon request)	
Integrated power supply	700mA max. integrated constant current driver in a waterproof junction box For the US & Canada use a UL class 2 driver	
LED power	1 LED : 2.4W at 700mA max. 3 LEDs : 7.2W at 700mA max.	
Use limitations	The drivers, if not delivered by LOuss, must be approved before use	
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labor warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in	

Tous les raccordements doivent impérativement être effectués avant la mise sous tension
sous peine d'endommager sérieusement les LED

LOuss

Creation : 2017.02.01 / Last update : 2025.07.28

2/2

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE