



## STIC

The colourful Linear LED light
















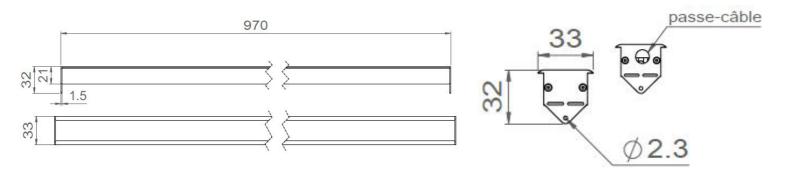

## STIC

Range	Indoor linear LED light
Description	Natural anodised aluminium profile  PMMA diffuser: opal, satin-like or transparent  Fixing foldable end caps (2 options)
Dimensions	Profile : 33x21mm Length : 330 ou 385mm - 450 ou 480mm - 650 mm - 760mm - 970mm - 1135mm
LED characteristics	6 LED (330mm / 385mm TW) : 3000K - 4000K - RGBW - RGB  12 LED (450mm / 650mm / 760mm TW) : 3000K - 4000K - RGBW - RGB  18 LED (970mm / 1135mm TW) : 3000K - 4000K - RGBW - RGB  White or RGB LED strip
Optical beam	14° - 30° - 40° - 60° - Elliptic (other LED colours upon request) LED strip or RGBW version: diffuser
Connection	Delivered with 1m standard cable (more length upon request)
Separate power supply	350mA – 500mA
LED power	350mA (PCB engine) : 7.2W (6 LED) – 14.4W (12 LED) – 21.6W (18 LED PCB) 500mA (PCB engine) : 10.8W (6 LED) – 21.6W (12 LED) – 32.4W (18 LED)
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees.  The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty.  The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product.  All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up, otherwise the luminaire could be seriously damaged.

**W**uss

Last update: 20/09/2018

Firalux & LOuss brands