

Wouss

Lighting Emotion



V25 Patella



V25 On-Plate



V25 Magnetic




V30 Patella



V30 On-Plate

V25/30





V25 • V30

Range	Adjustable luminaires for accent lighting		
Description	To be fixed via a patella, a plate or a magnet, according to version V25 : Orientation 120° - Adjustable tilt 105° V30 : Orientation 360° - Adjustable tilt 90°		
Finish	V25		V30
	Black matt finish (other upon request)		Natural or black anodized (other upon request)
Dimensions (fixing device included)	V25 Simple		V25 On-Plate
	Diameter : 24.9mm Length : 36.6mm Height : 47.2mm max.		Diameter : 24.9mm Length : 44.1mm Height : 50.2mm max.
	V25 Magnetic		
	Diameter : 24.9mm Length : 37.0mm Height : 52.2mm max.		
	V30 Patella		V30 On-Plate
	Diameter : 30.0mm Length : 44.3mm Height : 62.3mm max.		Diameter : 30.0mm Length : 56.6mm Max. height : 61.1mm
Weight	V25		V30
	± 0.05 kg according to version		0.039 kg
LED characteristics	1 LED : 2200K - 2700K - 3000K - 3500K - 4000K (other upon request) CRI 90 - 95 R9>80		
Optical beams	V25		V30
	CRI 92	10°- 12°- 18°- 24°- 36°- 40°- 54° - 60° - Elliptical Caution : The luminous border is poorly defined with 10° and 12° optics	10° - 12° - 15° - 28° - 32° - 40° (other upon request)
	CRI 95	15°- 17°- 25°- 31°- 36°- 40°- 57° - Elliptical	
Accessories	Filters, honeycomb grid upon request		
Connection	Supplied with 0.5m cable (more length upon request) Individual or series connection on external constant current driver		

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Last update : 2025.07.22



V25 • V30

Separate power supply	900mA max. external constant current driver Dimmable driver upon request For the US & Canada use a UL class 2 driver
LED power	2.7W at 900mA max
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use Electrical rating : III IP rating : 20 Dry locations only
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.



V25 PATELLA



V25 ON-PLATE





V25 MAGNETIC



Without accessories



With accessories
(example : honeycomb grid)

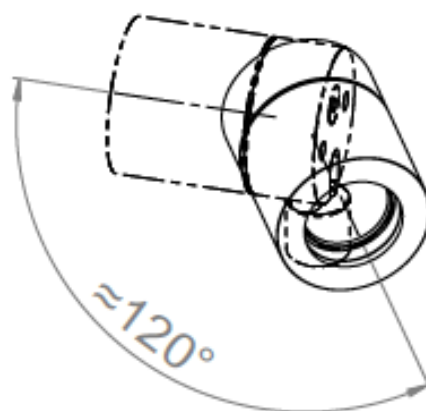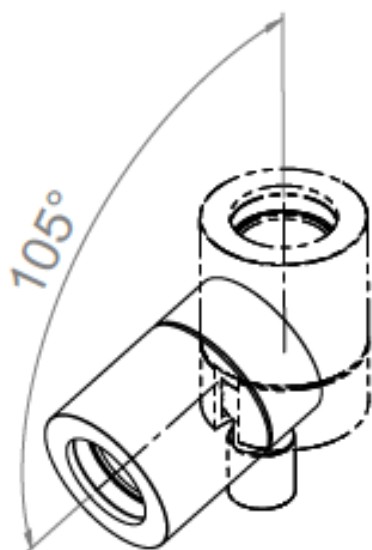

Beyond 120°, cables may
cause an inconvenience

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Last update : 2025.07.22

Louss

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

Firalux & LOuss brands




V25 PATELLA

Cable output below

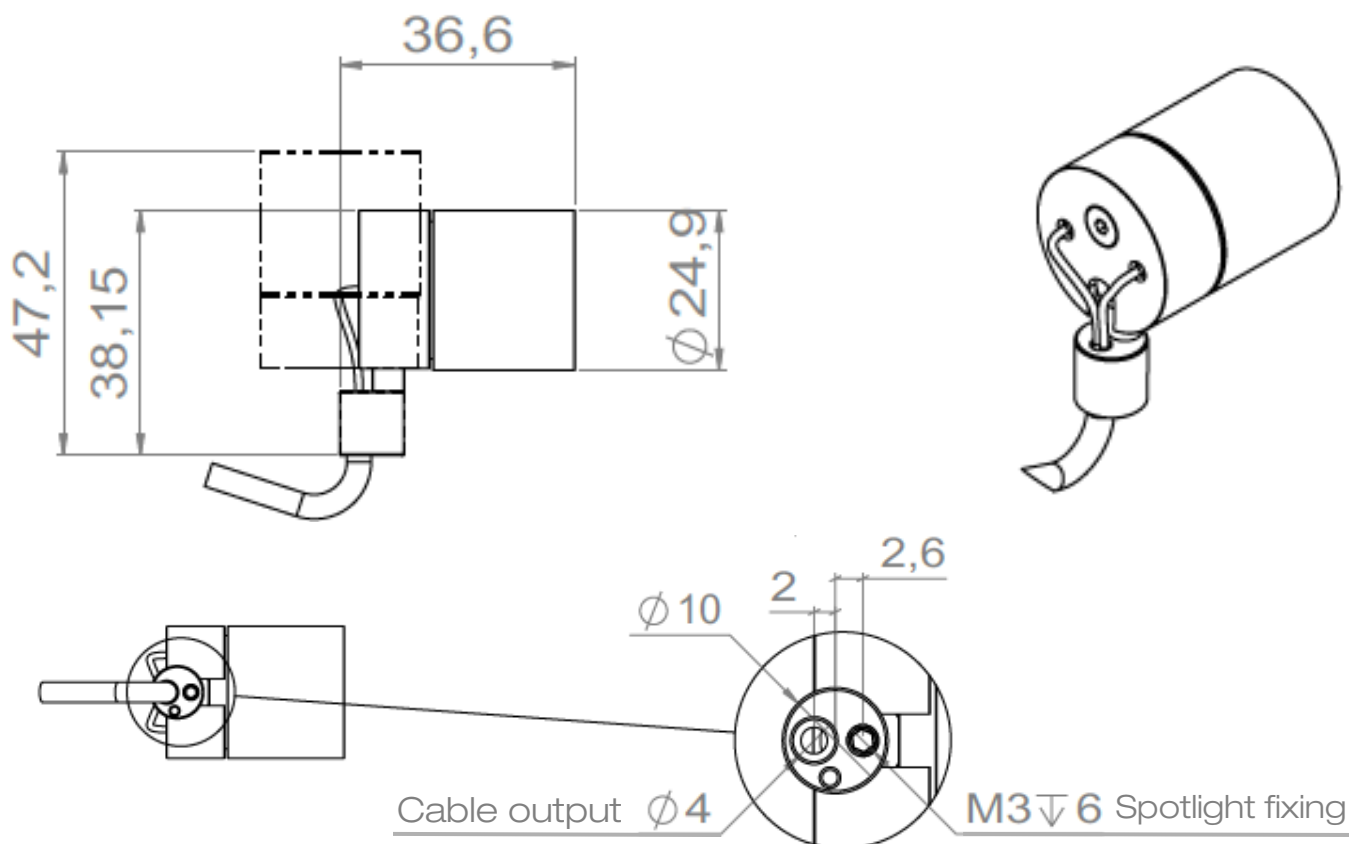

Cable output behind

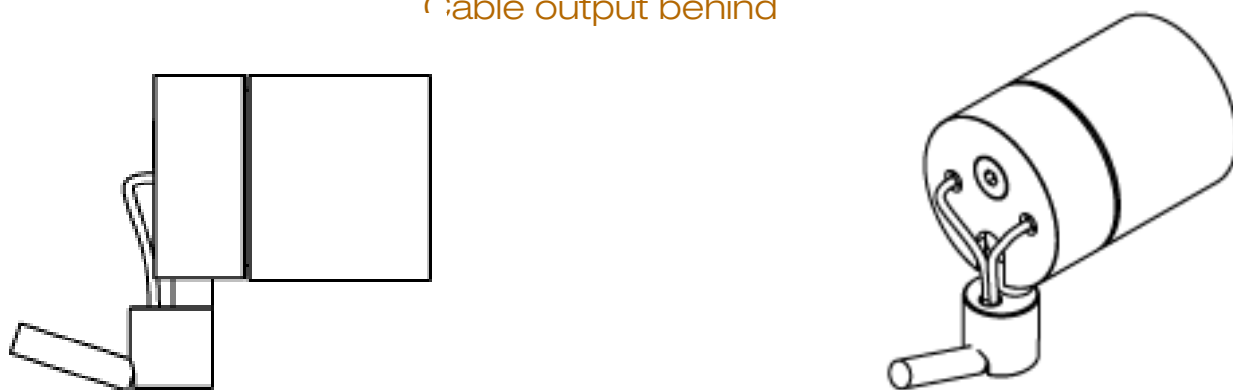

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Louss

Last update : 2025.07.22

5/8
Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z




Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





V25 ON-PLATE

Cable output below

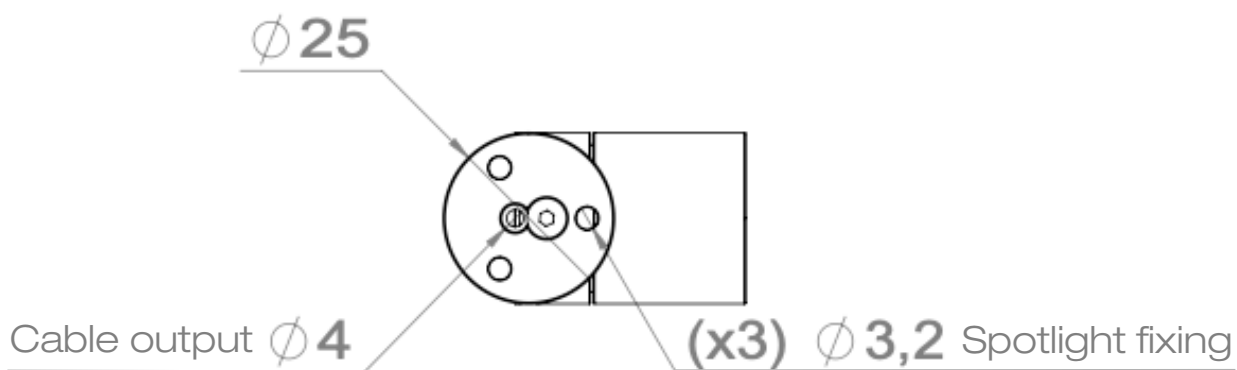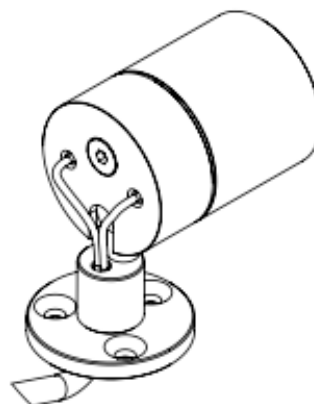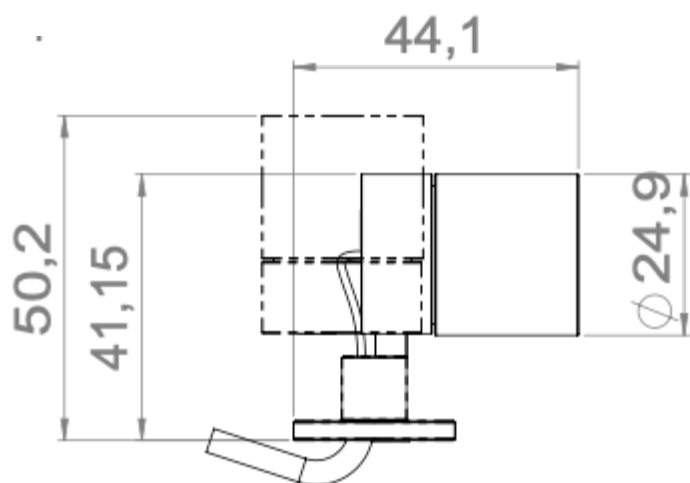

Cable output behind

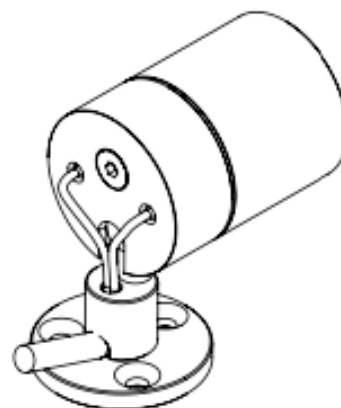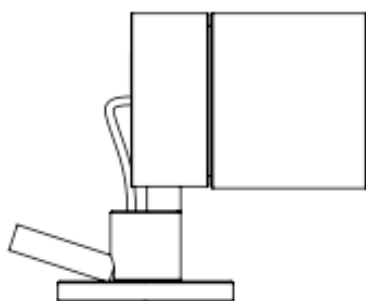

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Louss

Last update : 2025.07.22

6/8
Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z



Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



V25 MAGNETIC

Cable output behind only

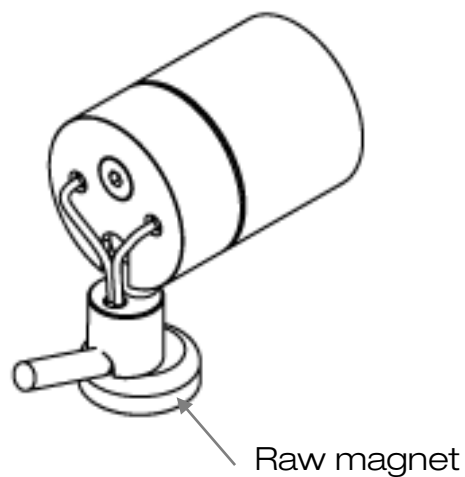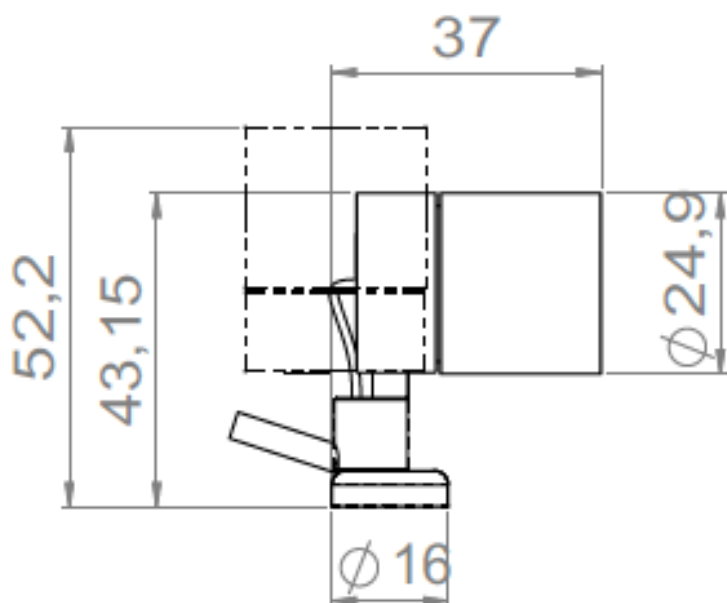

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Last update : 2025.07.22

7/8

Firalux & LOuss brands

LOuss



SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group



Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



V30 PATELLA

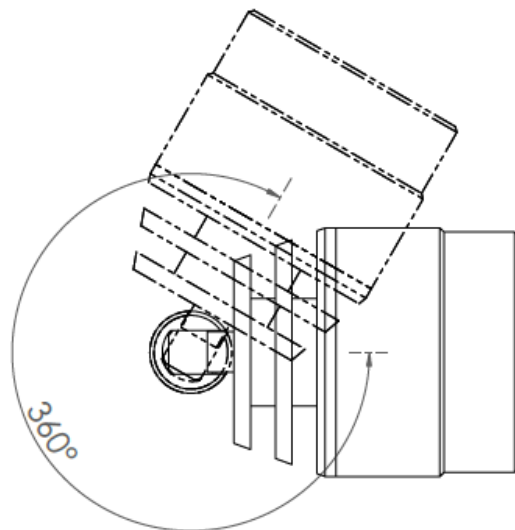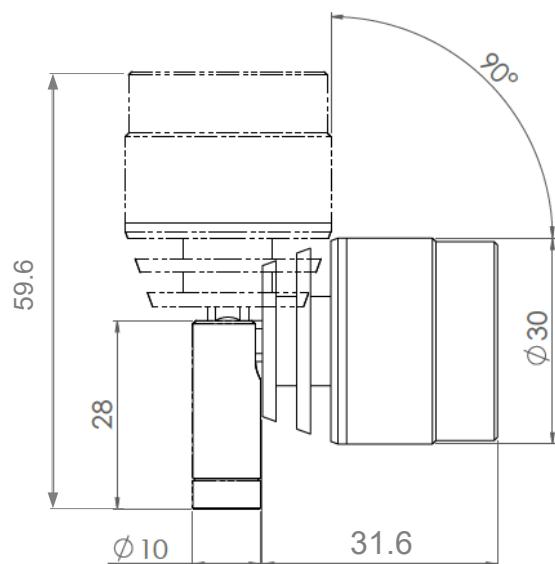

V30 ON-PLATE

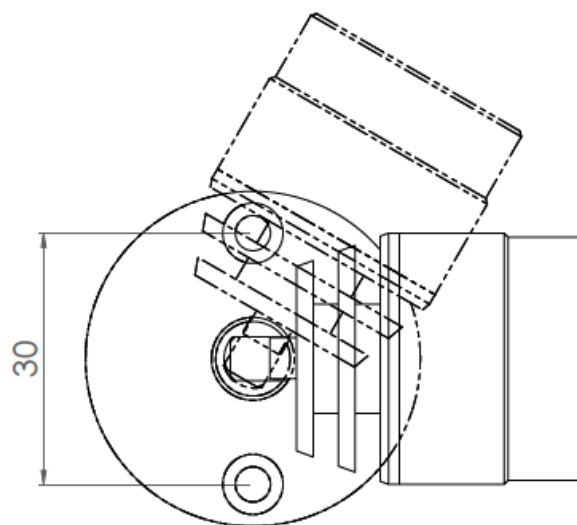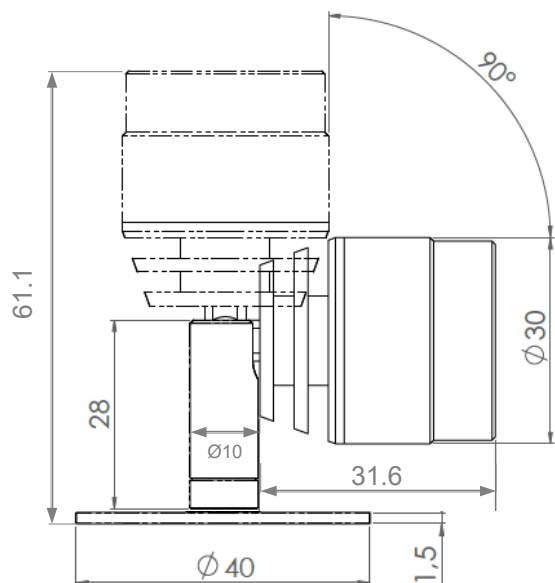

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Louss

Last update : 2025.07.22

8/8
Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE