

Wouss

Lighting Emotion



ANELO 30



ANELO 30 • LL



ANELO 30 • Patella



ANELO 45



ANELO 50



ANELO 60




ANELO 85



ANELO 130




ANELO 200



ANELO 250

ANELO





Range	Surface mounted architectural floodlighting	
Description	Aluminum body ANELO 30 - 30 Low Luminance - 30 Patella : • Supplied in Standard version or with a Low Luminance tube • Transparent polycarbonate protector, with anti-UV treatment • Installation on a plate or with a fixing screw • Orientation 360° - Adjustable tilt 110° ANELO 45 - 50 - 60 - 80 - 85 : • Transparent polycarbonate protector, with anti-UV treatment • Stainless steel fixing bracket ANELO 130 - 200 - 250 : • Extra clear tempered glass • Stainless steel fixing bracket	
Finish	ANELO 30 - 30 LL - 30 Patella - 45 : Thermo-lacquered paint – White RAL 9003 or Black RAL 9005 (other upon request) ANELO 50 - 60 - 80 - 85 - 130 - 200 - 250 Natural anodized aluminum (other upon request)	
Dimensions	Anelo 30 • LL • Patella	Anelo 45
	External diameter : 30mm 34mm (Low Luminance) Spotlight length : 48.25mm 66.25mm (LL) Spotlight weight : ± 0.12 kg	External diameter : 45mm Spotlight length : 73.5mm Spotlight weight : 0.20 kg
	Anelo 50	Anelo 60
	External diameter : 50mm Spotlight length : 61mm Spotlight weight : 0.22 kg	External diameter : 62mm Spotlight length : 70.25mm Spotlight weight : 0.30 kg
	Anelo 85	Anelo 130
	External diameter : 85mm Spotlight length : 76mm Spotlight weight : 0.60 kg	External diameter : 130mm Spotlight length : 59mm Spotlight weight : 1.30 kg
	Anelo 200	Anelo 250
	External diameter : 200mm Spotlight length : 67mm Spotlight weight : 3.10 kg	External diameter : 250mm Spotlight length : 80mm

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged



LED characteristics	2200K - 2700K - 3000K - 4000K - 5000K - 6500K (other upon request) CRI 80 - CRI 90 (R9>50) - CRI 95 (R9>80)	
	Anele 30 • Basse Luminance • Patella	Anele 45
	1 LED monochrome	1 or 4 LEDs monochrome
	Anele 50	Anele 60
	1 LED monochrome	1 LED monochrome 4in1 LED Twin White or RGBW
	Anele 85	Anele 130
	6 LEDs monochrome 8 LEDs Twin White or RGBW	6 or 12 LEDs monochrome 6 LEDs 4in1 RGBW 12 LEDs Twin White
	Anele 200	Anele 250
Optical beams (other beams upon request)	Anele 30 • Low Luminance • Patella	Anele 45
	12° - 15° - 35° - 55° - Elliptical	6° - 15° - 35° - 55° - Elliptical
	Anele 50	Anele 60
	6° - 15° - 35°	Monochrome / Twin White: 4° - 6° - 15° - 35° LED 4in1 RGBW : 12° - 24° - 32° - 10°x40°
	Anele 85	Anele 130
	15° - 20° - 35° - 40° - 60° - 80° - 18°x36° 4in1 LED : 20° - 30° - 55° - 70°	6° - 15° - 20° - 30° - 40° - 60° 4in1 LED : 20° - 30° - 55° - 70°
	Anele 200	Anele 250
	7° - 15° - 30° - 35° - 40° - 60°	12° - 15° - 20° - 30° - 35° - 40° - 50° - 55° - 80° - 100° - 120°
Accessories	Filters, honeycomb grid upon request	
Connection	Supplied with 1m cable Individual or serial connection on external constant current driver	

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOUSS

Last update : 2025.08.04

3/9
Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE






Separate power supply	ANELO 30 – 30 Low Luminance – 30 Patella : 1050mA max. external constant current driver according to LED type ANELO 45 – 50 – 60 – 80 – 85 – 130 – 200 : 700mA max. external constant current driver Anele 85 RGBW : 500mA max external constant current driver ANELO 250 : 1A max. / 55V max. external constant current driver RGBW version : DMX constant current driver For the US & Canada use a UL class 2 driver	
LED power	Anele 30 • Basse Luminance • Patella	Anele 45
	1 LED monochrome : 3.5W max.	1 LED monochrome : 2.1W max. 4 LEDs monochrome : 8.4W max.
	Anele 50	Anele 60
	1 LED monochrome: 2.4W max.	1 LED monochrome : 2.4W max. 4in1 LED : 8W max
	Anele 85	Anele 130
	6 LEDs monochrome : 12W max. 8 LEDs RGBW / Twin White : 15W max.	6 LEDs monochrome : 12W max. 12 LEDs monochrome / RGBW : 28.8W max.
	Anele 200	Anele 250
	18 LEDs monochrome : 36W max. 24 LEDs RGBW / Twin White : 45W max. (full RGBW)	16 groups of 4 LEDs Monochrome / Twin White / RGBW : 64 LED in total 40W max / group Total capacity : 100W
Use limitations	The drivers, if not delivered by LOuss, must be approved before use	
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labor warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in	


All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged






ANELO 30

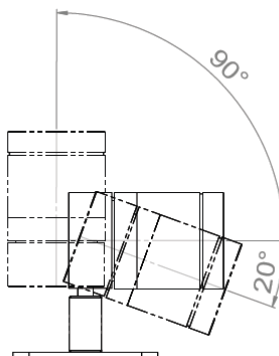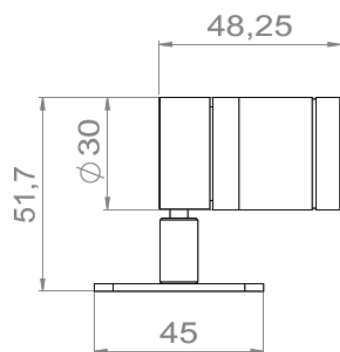


Rotation 360°






ANELO 30 • Low Luminance

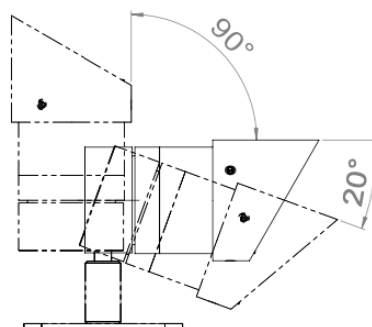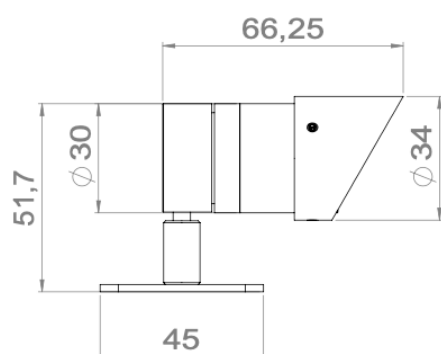


Rotation 360°



ANELO 30 • Patella

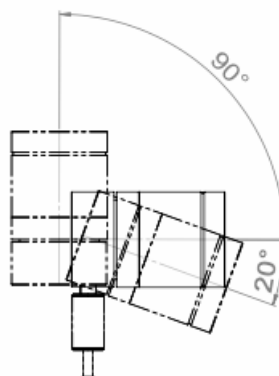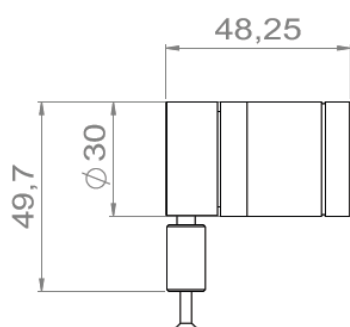

Rotation 360°



All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update : 2025.08.04

5/9

Firalux & LOuss brands

LOuss


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



ANELO 45

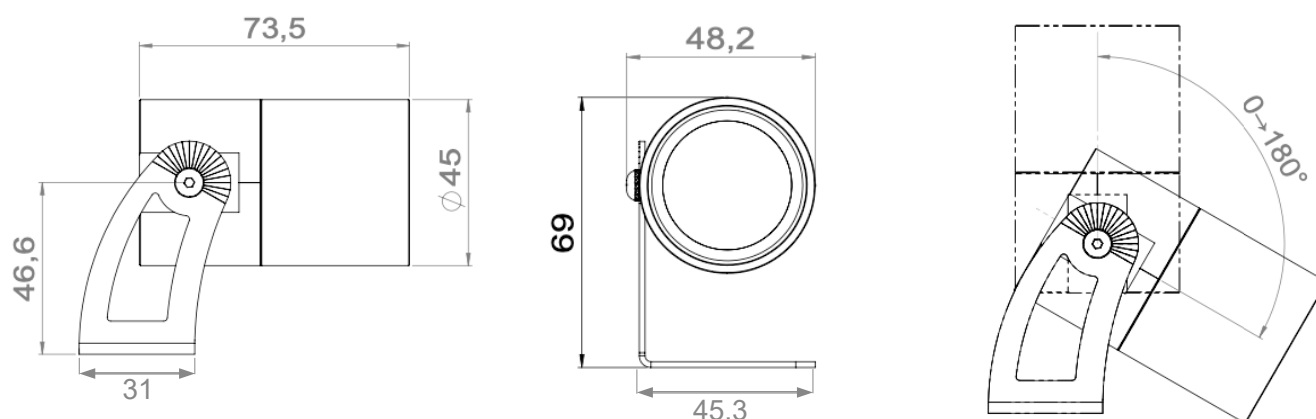

ANELO 50

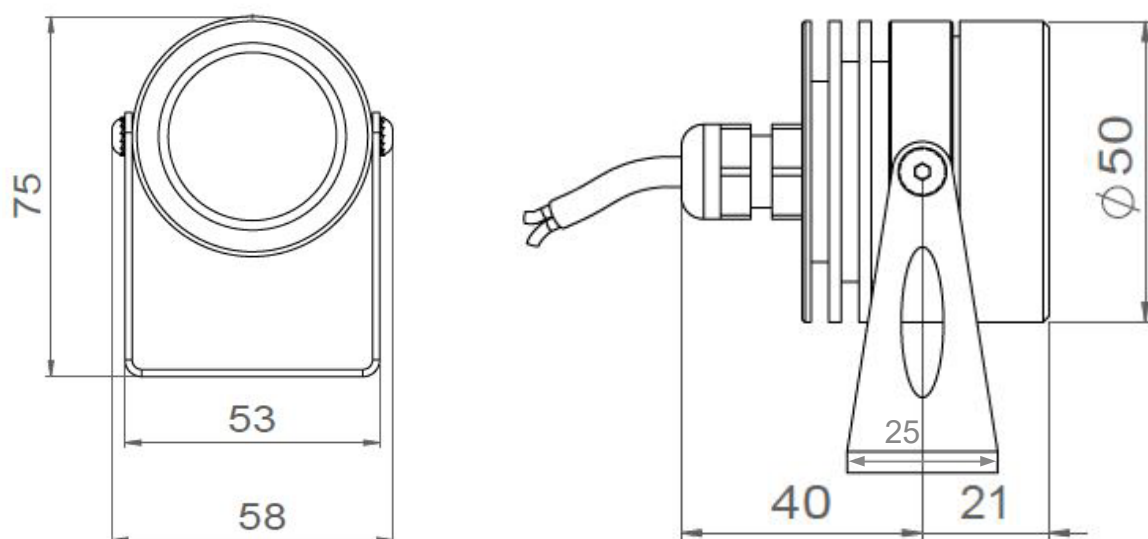

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update : 2025.08.04

6/9

Firalux & LOuss brands

LOuss

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




ANELO 60

Individual connection

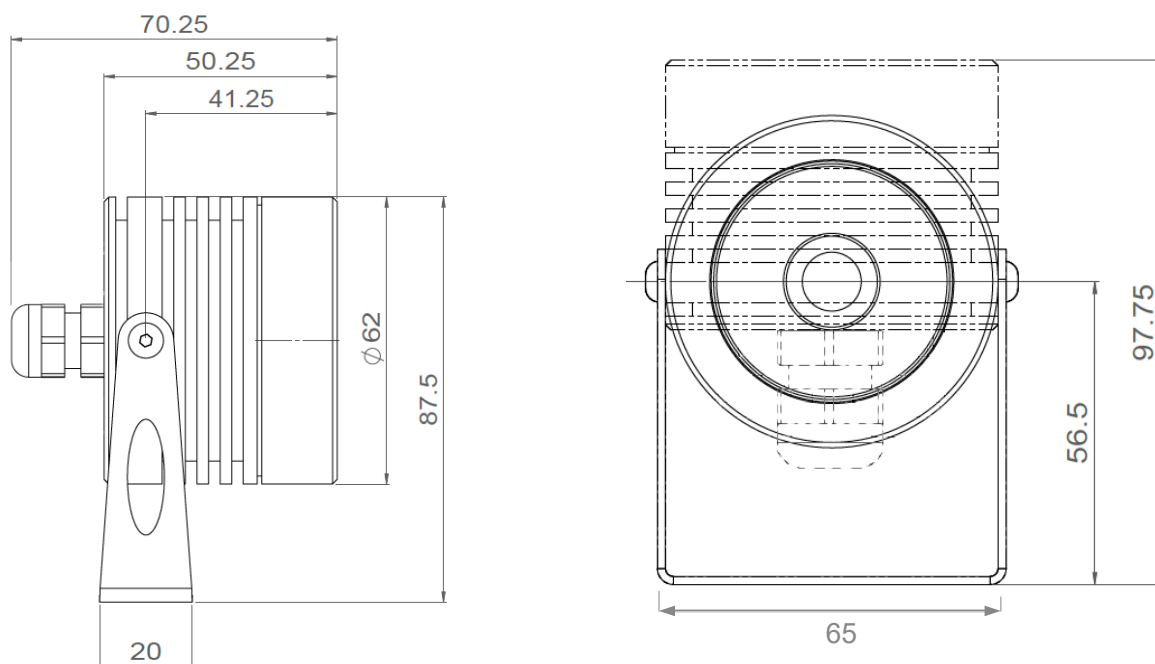

Daisy-chain connection

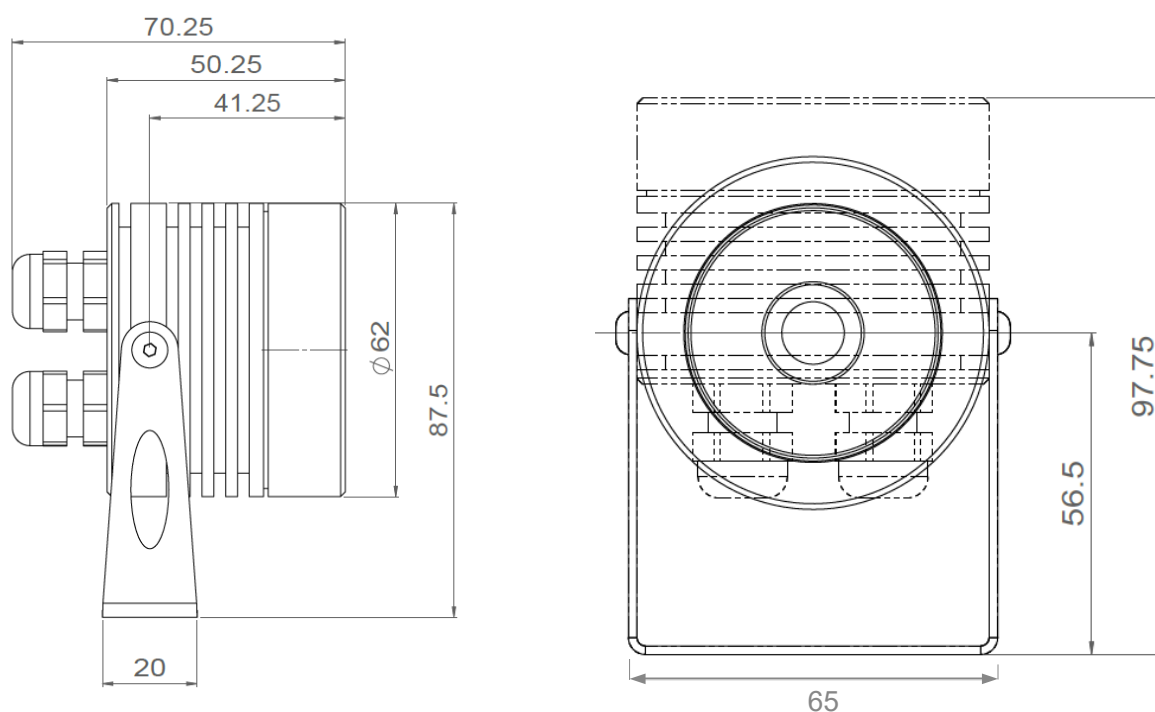

Tous les raccordements doivent impérativement être effectués avant la mise sous tension
sous peine d'endommager sérieusement les LED

Mise à jour : 04.08.2025

Firalux & LOuss brands

LOuss



SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group



Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



ANELO 85

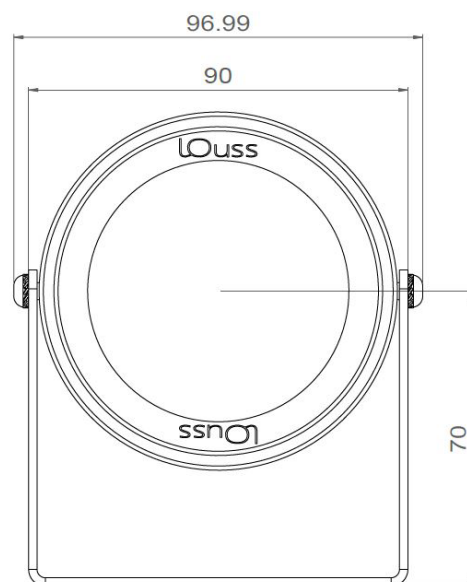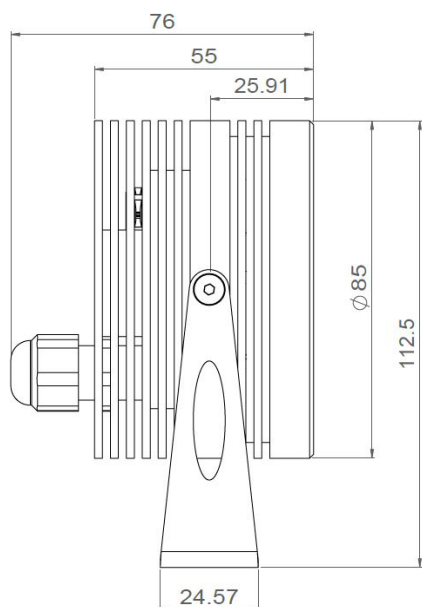

ANELO 130

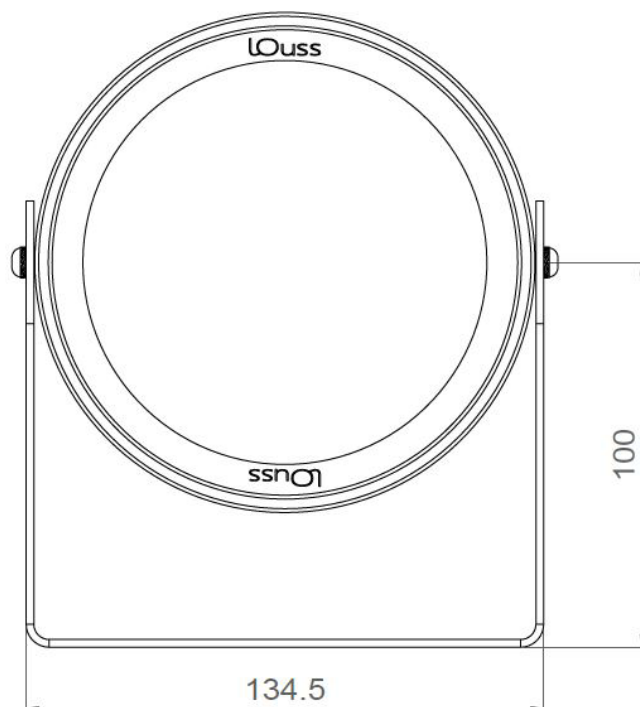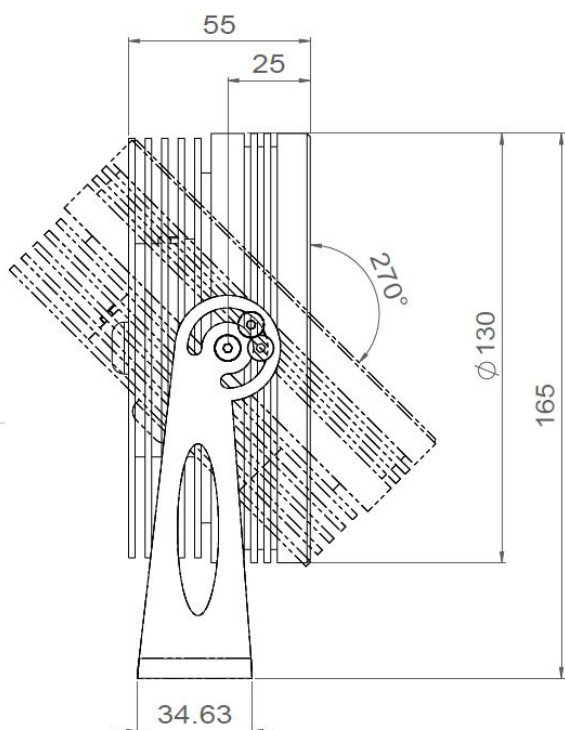

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update : 2025.08.04

8/9

Firalux & LOUSS brands

LOUSS



SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group




Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



ANELO 200

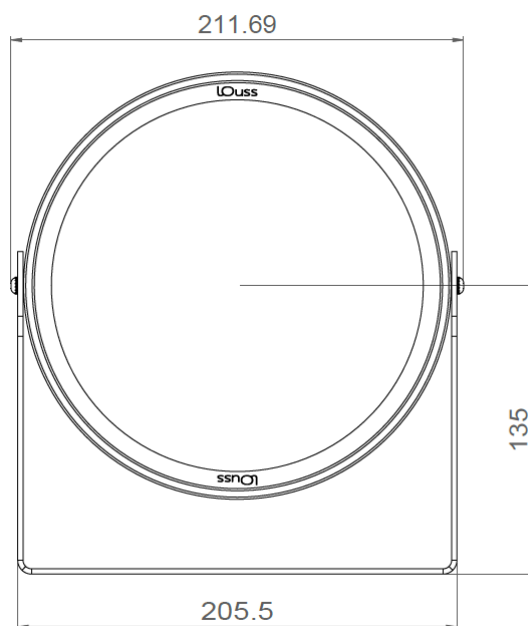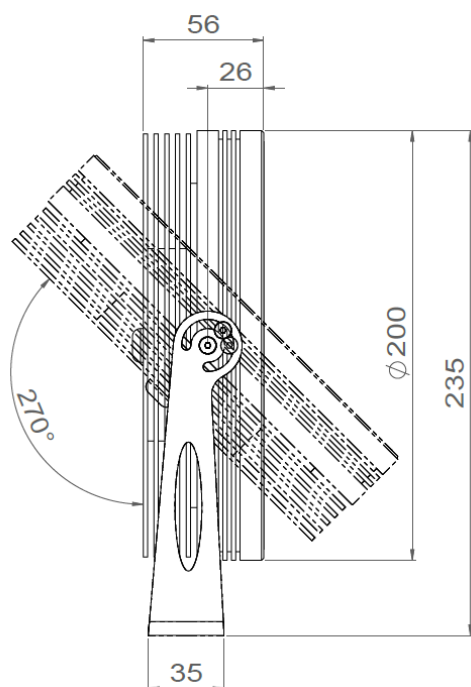

ANELO 250

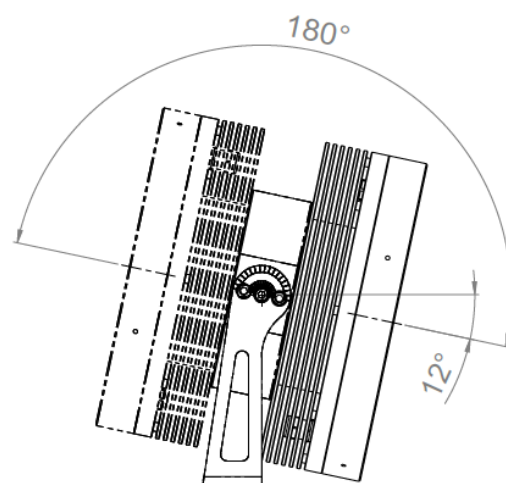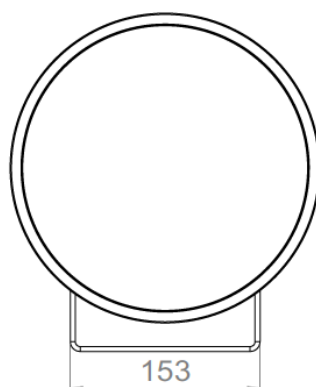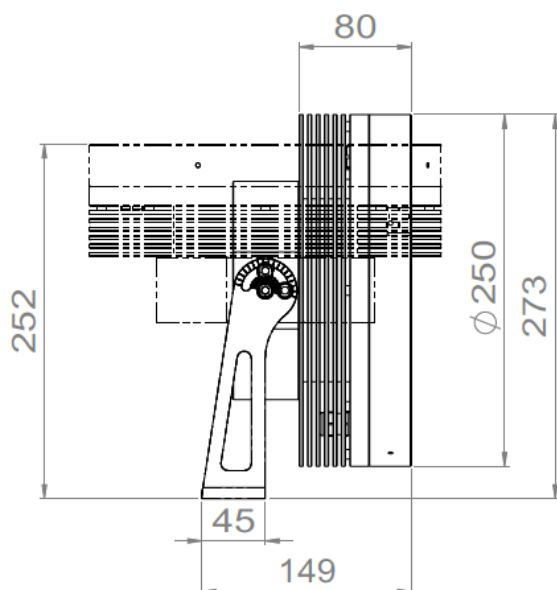

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update : 2025.08.04

9/9

Firalux & LOUSS brands

LOUSS

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE