




24/48V-S



24/48V DALI

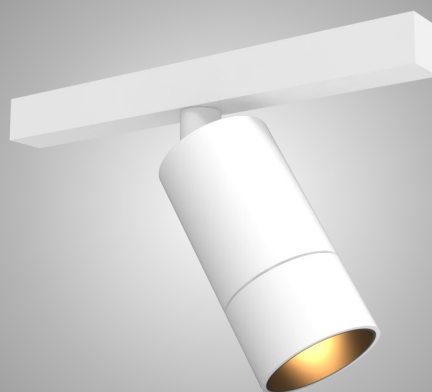

230V



230V DALI

AURORE D40 TRACK



AURORE D40 ON TRACK • 24/48V-S • 24/48V Dali • 230V • 230V Dali

Range	Highly flexible spotlight on track for general & accent lighting	
Description	Low luminance Rotation 360° - Adjustable tilt 90° Optional : Easily changeable LED, optics and accessories on site, without any tool, with integrated Easy Swap system (see page 7)	
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)	
Dimensions	24/48V-S • 24/48V DALI	230V • 230V DALI
	Spotlight Diameter : 40mm Length : 80mm Driver's length : 98mm (ON/OFF) 166mm (DALI) Stucchi Evo System Track ST1 : 26.2 x 21mm	Spotlight Diameter : 40mm Length : 80mm Driver's length : 162mm (ON/OFF) 253.5mm (DALI) Track Dimensions : 31.5 x 35.5mm
Net weight	24/48V-S • 24/48V DALI	230V • 230V DALI
	Spotlight (driver included) ± 0.150 kg according to version Stucchi Evo System Track ST1 : 0.7 kg/m	Spotlight (driver included) ± 0.3 kg according to version Track ± 1 kg/m
LED characteristics	24/48V-S • 24/48V DALI	230V • 230V DALI
	MacAdam ellipse : 3 SDCM (standard) 2 SDCM (premium)	MacAdam ellipse : 3 SDCM
	2700K - 3000K - 3500K - 4000K - 5000K (other upon request) CRI90 (standard version) - CRI95, R9 > 80	
Optical beams	6° - 10° - 15° - 20° - 25° - 30° - 35° - 40° - 55° - 60° - Elliptical UGR < 15	
Accessories	Filters, honeycomb grid upon request	
Luminous flux	300 to 800 lumen according to version	





AUORE D40 ON TRACK • 24/48V-S • 24/48V Dali • 230V • 230V Dali



Power supply	24/48V-S • DALI 24/48V	230V • DALI 230V
	Spot adaptator for 24/48V Stucchi Evo System track	230V : Track adapter suitable for Global Trac PRO XTS or simalar (ERCO, Trajectoire...) 230V DALI : • Track adapter suitable for Global Trac Pulse, STUCCHI, SLV... • Optional : CASAMBI-DALI gateway (see page 6)
Power	4W to 10W according to version	
Electric class	24/48V tracks : class 3 230V tracks : class 2	
Use limitations	The product must be installed in a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use	
Warranty	Life span : L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lightning injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in.	



AURORE D40 24/48V-S TRACK

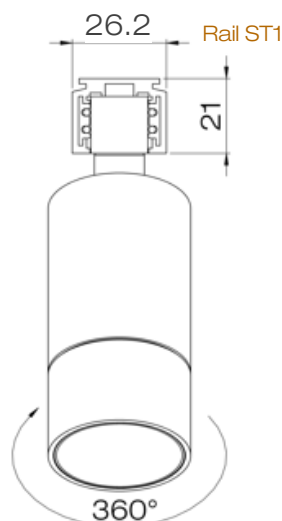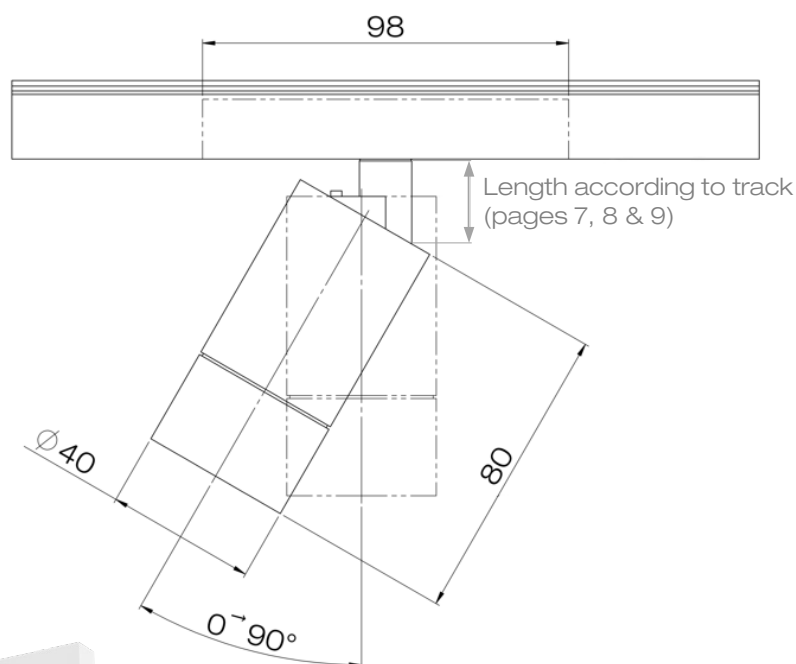

AURORE D40 24/48V DALI TRACK

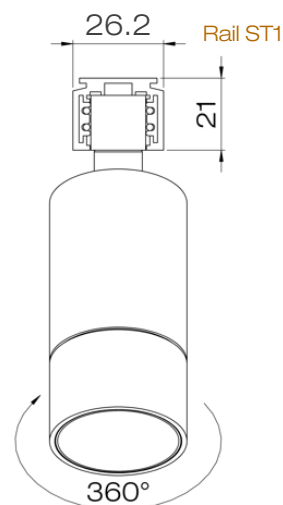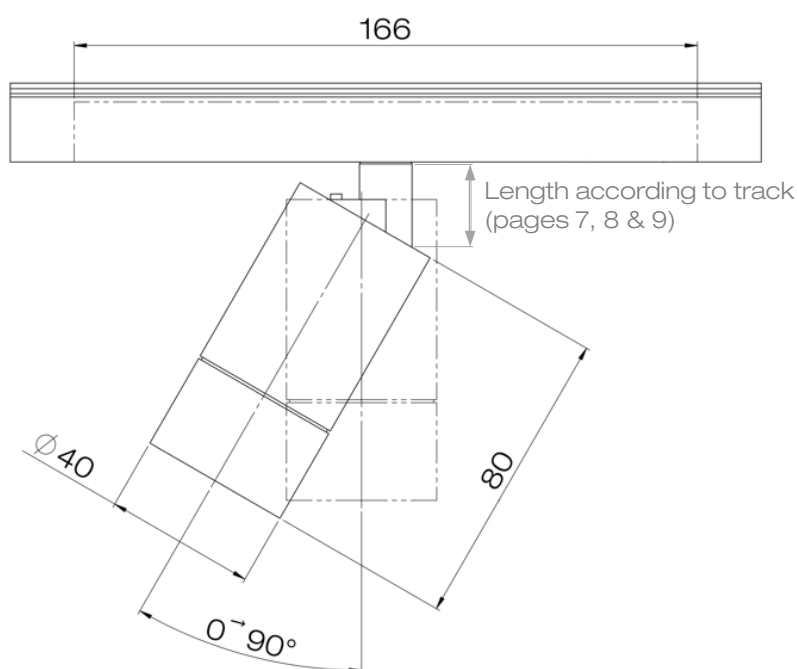

Wouss

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged
Last update : 2025.10.30

4/7

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z



Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





AUORE D40 230V TRACK

Track Global Trac PRO
Warning: Dimensions may vary by a few mms from one manufacturer to another

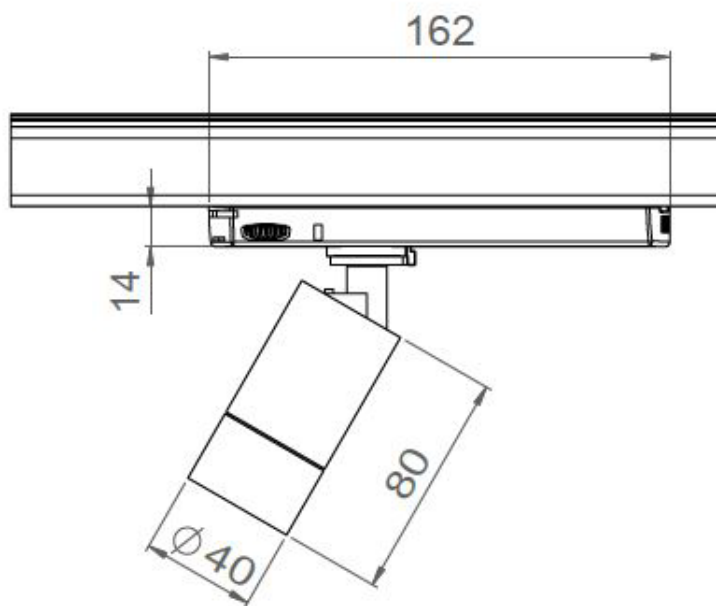

AUORE D40 230V DALI TRACK

Track DALI Global Trac pulse
Warning: Dimensions may vary by a few mms from one manufacturer to another

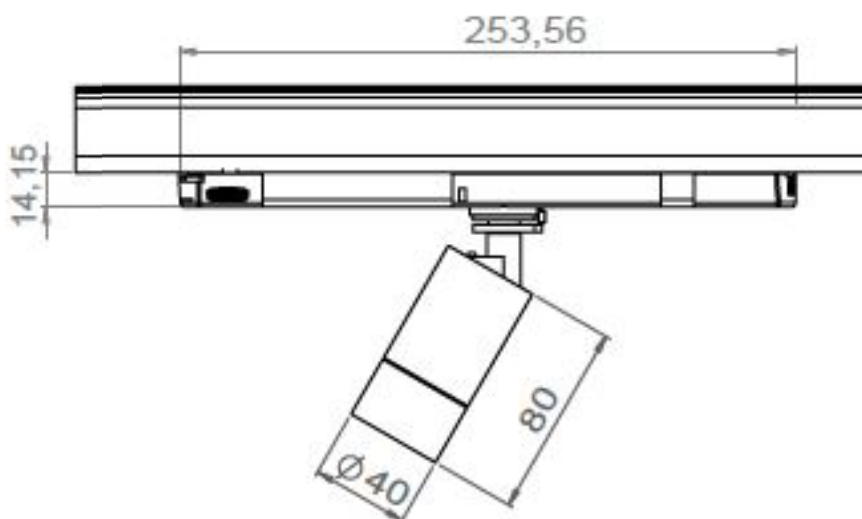

Louss

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged
Last update : 2025.10.30

5/7

Firalux & LOuss brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D40 230V TRACK CASAMBI-DALI Wiring system

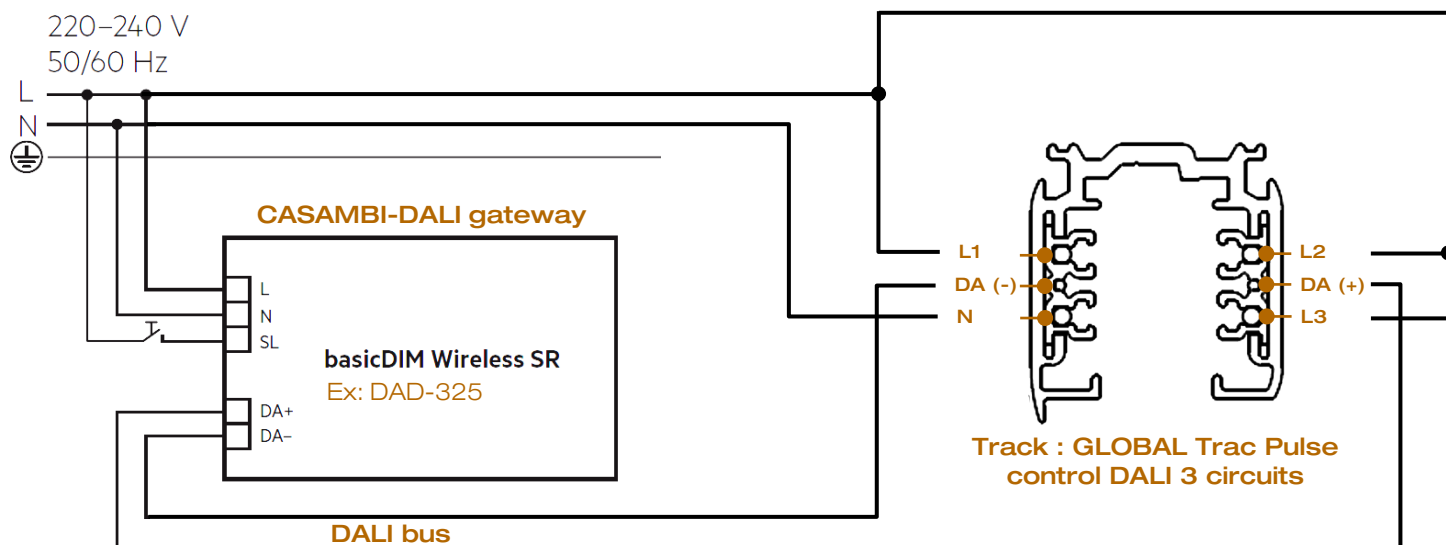

CAUTION : 25 drivers maximum per track

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update : 2025.10.30

6/7

LOUSS

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

Firalux & LOUSS brands



AUORE D40 ON TRACK • 24/48V-S • 24/48V Dali • 230V • 230V Dali

Easy swap system



All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOUSS

Last update : 2025.10.30

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE