




AURORE D52 RECESSED





Range	Highly adjustable recessed ceiling downlights for general & accent lighting			
Description	Low luminance Rotation 360° Trim, Trimless & Trimless Short : Adjustable tilt 30° Fixed Trimless : Droit – pre-adjusted tilt 20° (other upon request) Trimless Flush : Adjustable tilt 20° Recessed On-plate : Adjustable tilt 90°			
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)			
Dimensions	Recessed On-plate	Fixed Canon	Trim	Trimless
	Spotlight diameter : 52mm Plate diameter : 71mm Installation depth : 32mm Spotlight length : 13W : 95mm 20W : 140mm	Spotlight diameter : 52mm External diameter : 52mm Installation diameter : 58mm Installation depth : 13W : 39mm 20W : 84mm	Spotlight diameter : 52mm 110mm Recessing-box diameter : Installation diameter : 84.5mm Installation depth : 13W : 90mm 20W : 45mm	Spotlight diameter : 52mm 89mm Recessing-box diameter : Installation diameter : 89mm Spotlight length : 13W : 49mm 20W : 94mm
	Trimless Wall Washer	Trimless Flush	Fixed Trimless	
	Spotlight diameter : 52mm 89mm Recessing-box diameter : Installation diameter : 89mm Installation depth : 20W : 94mm	Spotlight diameter : 52mm 99mm Recessing-box diameter : Installation diameter : 99mm Installation depth : 95mm	Spotlight diameter : 52mm External diameter : 55mm Installation diameter : 55mm Installation depth : 144 to 160mm (according to installation mode)	
	2700K – 3000K – 3500K – 4000K – 5000K (other upon request) MacAdam ellipse : 3 SDCM (standard version) – 2 SDCM (premium version) IRC > 90 (standard) / IRC 95, R9 > 90 (premium)			
	7° - 12° - 15° - 18° - 20° - 25° - 30° - 35° - Elliptical UGR < 15			
Accessories	Filter, honeycomb grid			
Luminous flux	600 to 2,000 lumen according to version			

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged



RECESSED
ON-PLATE



FIXED CANON



TRIM



TRIMLESS



TRIMLESS W.W



TRIMLESS
FLUSH



FIXED TRIMLESS

Connection	Supplied with 0.5m cable
Power supply	Remote constant current driver 1400mA max. according to version Dimmable driver upon request For USA & Canada use UL class 2 power supply
Power	6W to 25W according to version
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span: L80-B10 = 35,000 hours (80% remaining flux) at 30°C ambient temperature The warranty applies to components and fabrication supplied by Louss The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and receive a functional burn-in

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOuss

Last update: 2025/06/12

Firalux & LOuss brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D52 RECESSED ON-PLATE

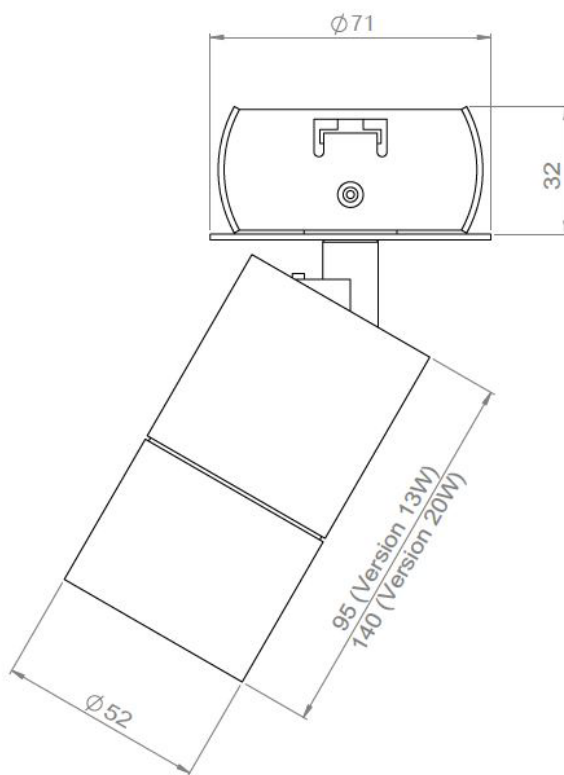

AURORE D52 FIXED CANON

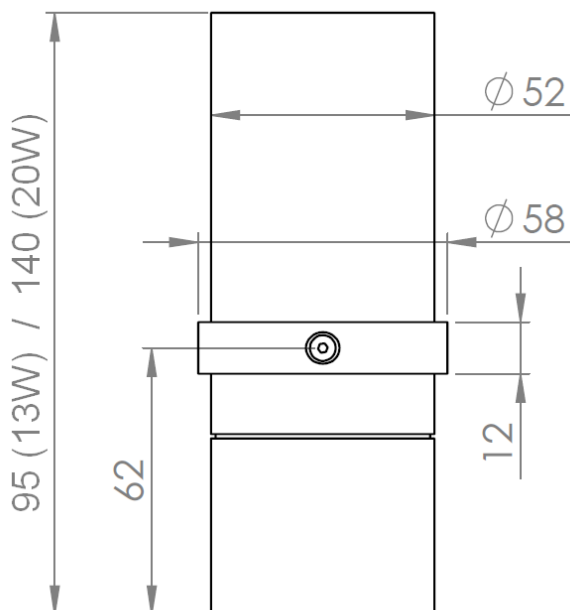

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOUSS

Last update: 2025/06/12

Firalux & LOUSS brands



SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group



Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D52 TRIM 13W

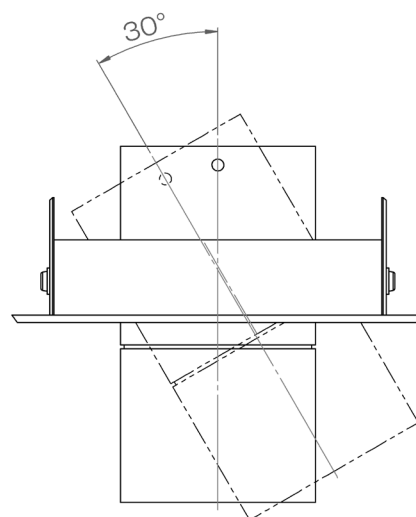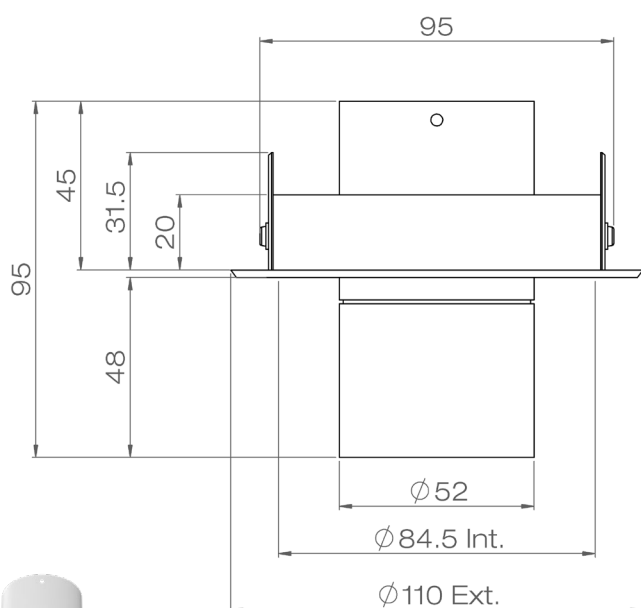

AURORE D52 TRIM 20W

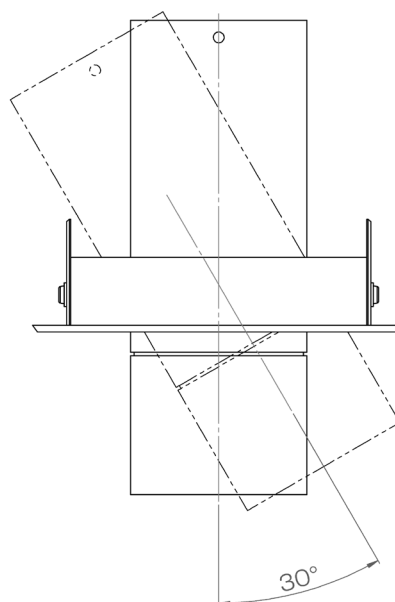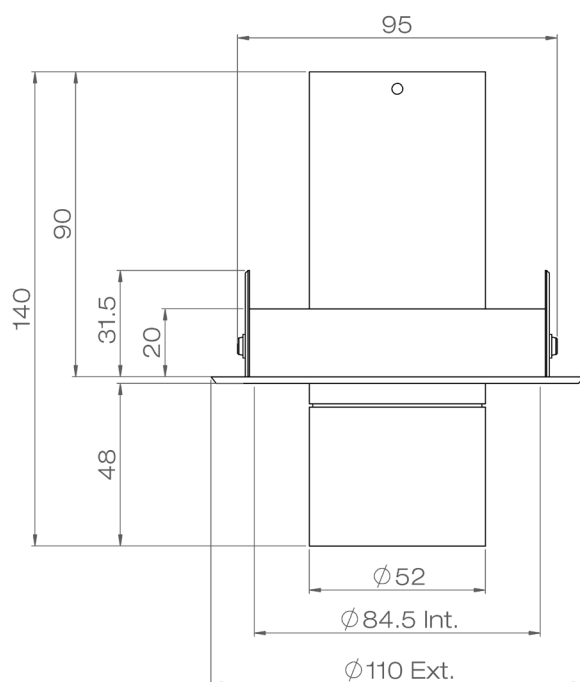

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Louss

Last update: 2025/06/12

Firalux & LOuss brands




SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group



Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D52 TRIMLESS 13W

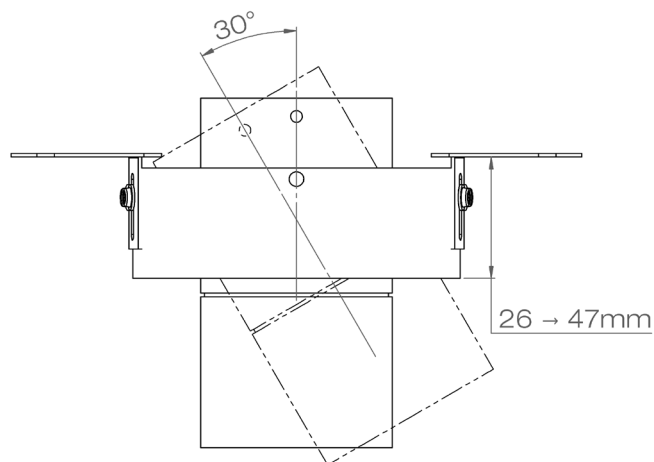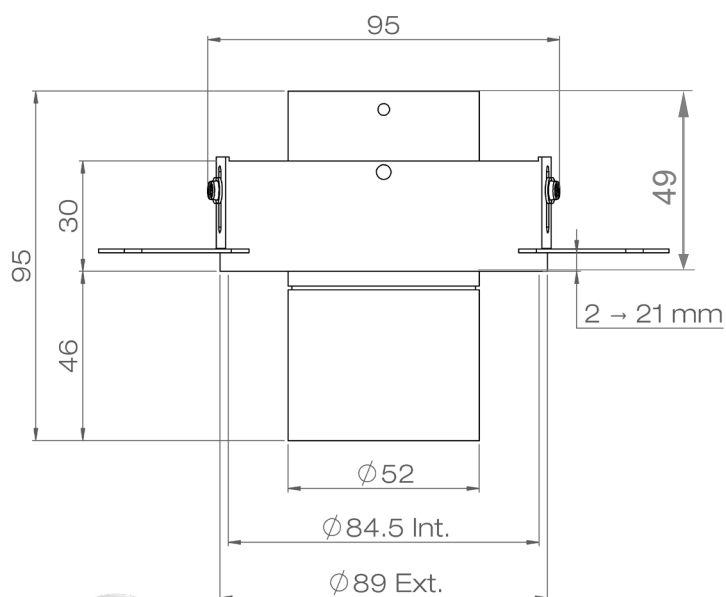

AURORE D52 TRIMLESS 20W

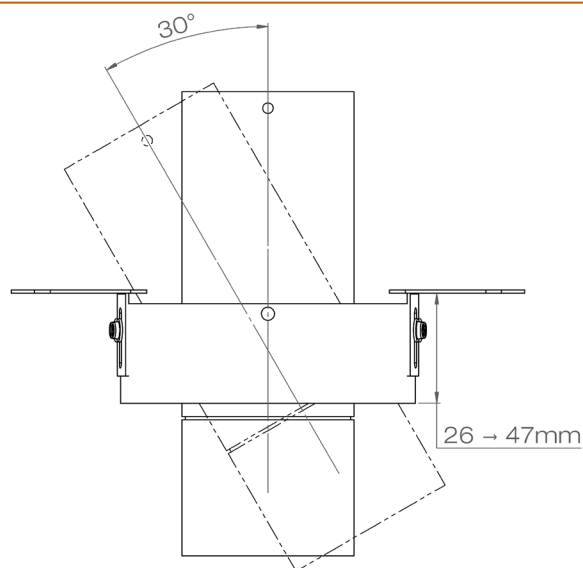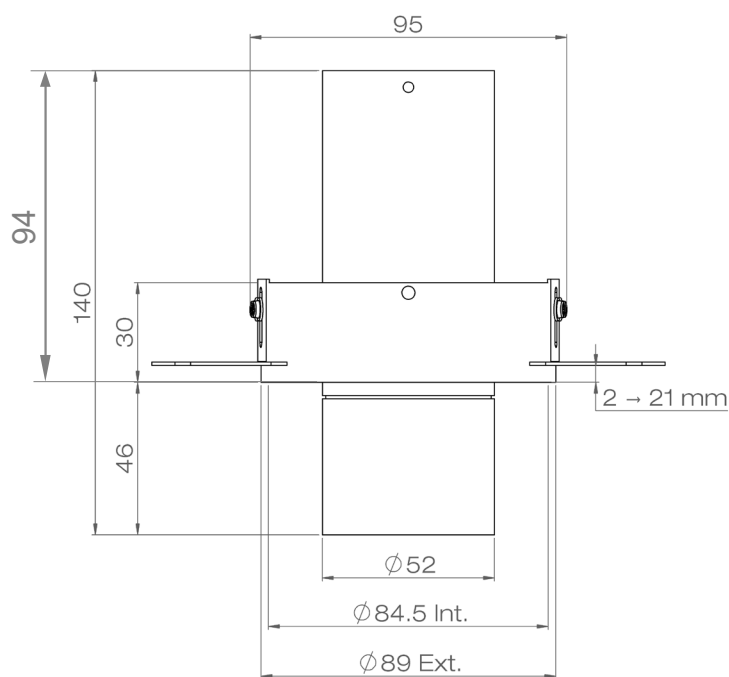

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Louss

Last update: 2025/06/12

Firalux & LOuss brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group



Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D52 TRIMLESS WALL WASHER


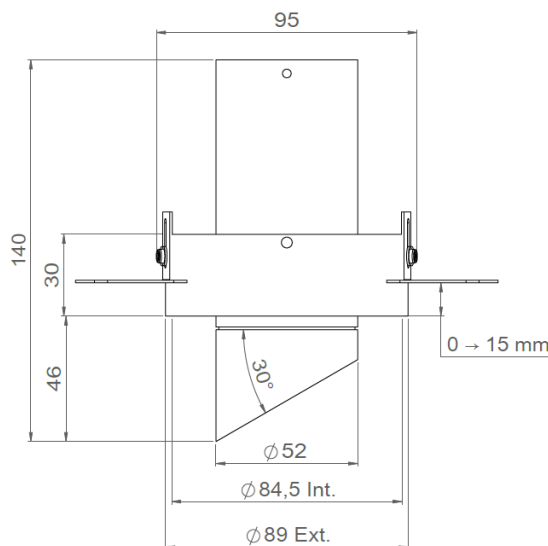


AURORE D52 TRIMLESS FLUSH

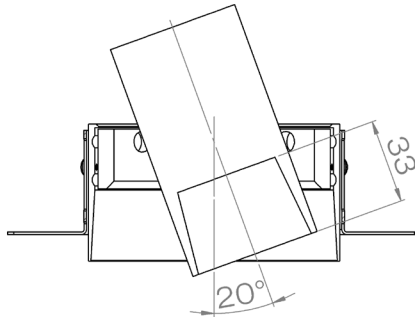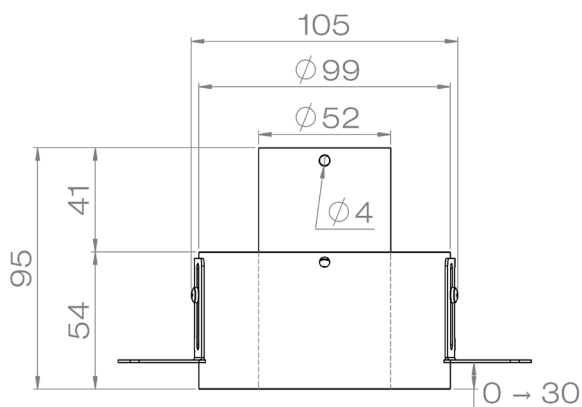

Upper position

Insert the luminaire into the **upper position** of the recessed frame to obtain a **flush** luminaire

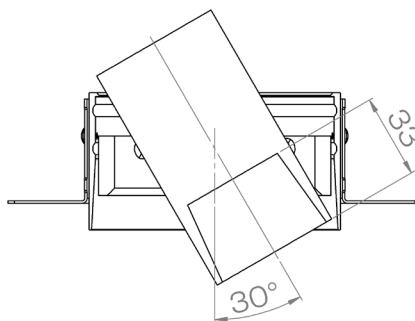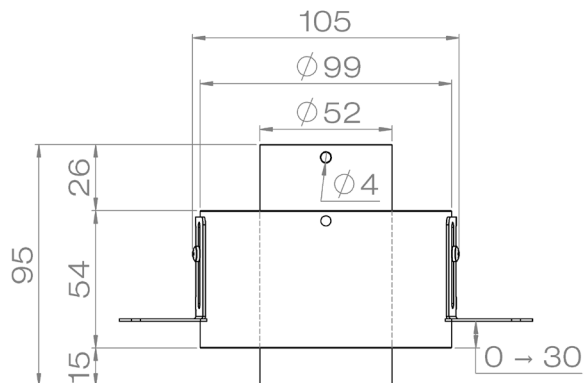

Low position

To obtain **30° orientation** angle, insert the luminaire in the **lowest position**

WARNING :
in this position, the spotlight cannot flush with the ceiling

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Wouss

Last update: 2025/06/12

7/10

Firalux & LOuss brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




Installation from above




Install the recessed frame from above and screw it into the surface

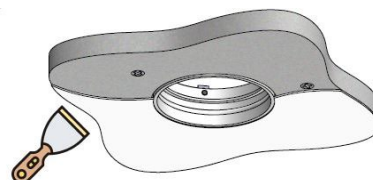


Cover the lateral plates of the recessed frame by coating and painting




Insert the spotlight from below

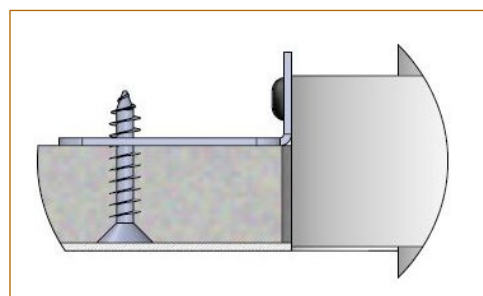


Installation from below




Install the recessed frame from below and screw it into the surface

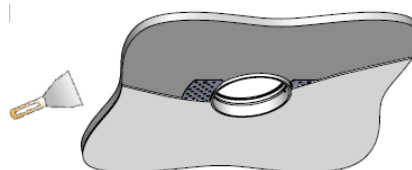

Cover the lateral plates of the recessed frame by coating and painting



Insert the spotlight from below

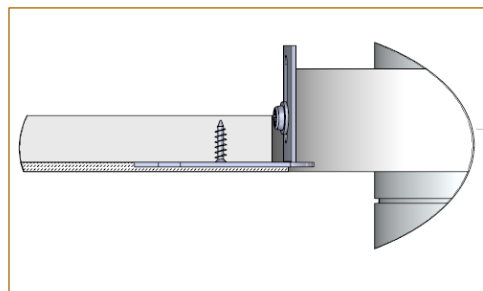

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update: 2025/06/12

Louss


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




AURORE D52 TRIMLESS FIXE DROIT

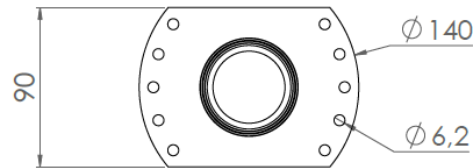


BA13 version
Installation from above

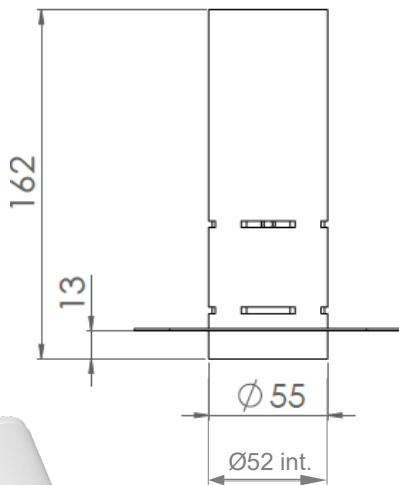


BA18 version
Installation from above

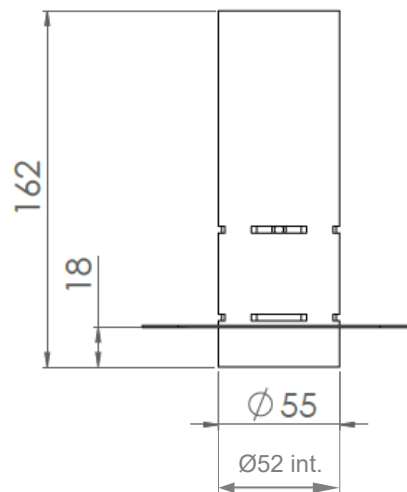


Installation from below

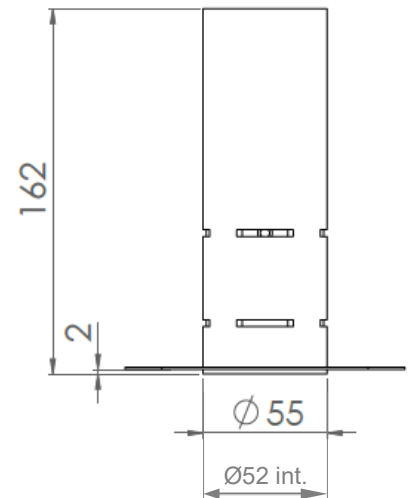


AURORE D52 TRIMLESS FIXE INCLINÉ

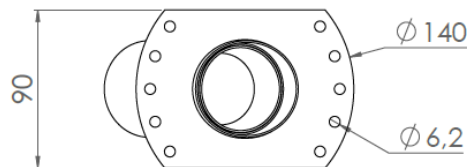


BA13 version
Installation from above

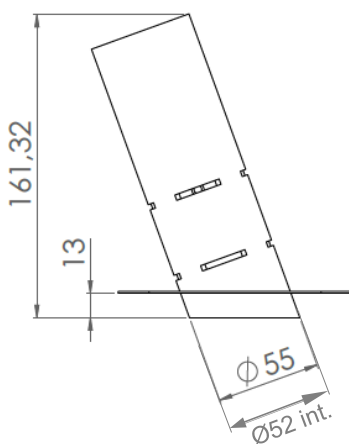

BA18 version
Installation from above

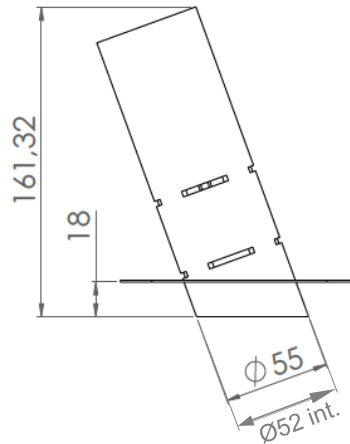

Installation from below

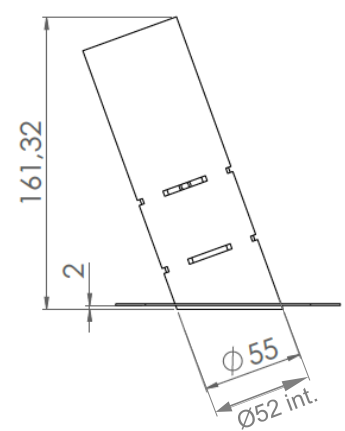

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOUSS


Last update: 2025/06/12

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




AUORE D55 FIXED TRIMLESS

Installation from above




Install the recessed tube from above and screw it into the surface




Cover the lateral plates of the recessed tube by coating and painting




Insert the spotlight from below

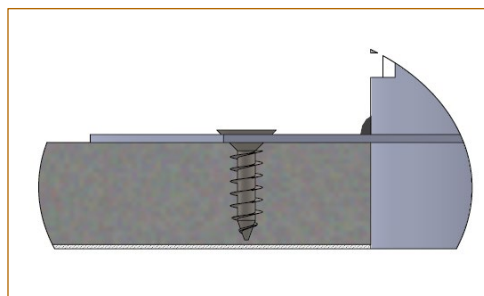

Installation from below




Install the recessed tube from below and screw it into the surface



Cover the lateral plates of the recessed tube by coating and painting



Insert the spotlight from below

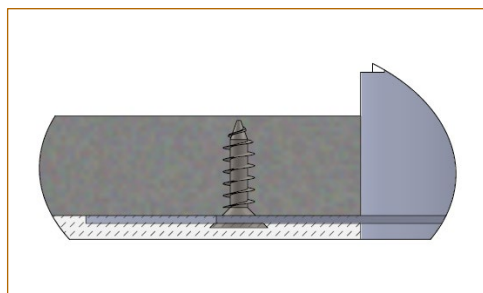

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

LOUSS

Last update: 2025/06/12

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE