



# AURORE D52

Wall-mounted version







### AURORE D52 Wall-mounted version

| Range                   | Highly flexible recessed ceiling downlight for general & accent lighting  |
|-------------------------|---|
| Description             | Low luminance<br>Rotation 360° - Adjustable tilt 90°<br>White finish RAL 9003 (other upon request)  |
| Net weight              | 0.80 kg   |
| Installation            | No specific tools required  |
| LED characteristics     | 2700K – 3000K – 4000K – 5000K<br>MacAdam ellipse: 3 SDCM (standard version) – 2 SDCM (premium version)<br>CRI: 90 (standard version) – CRI: 95, R9 > 90 (premium version)<br>UGR < 15<br>LED ENGINE 600 to 2 000 Im according to version  |
| Optical beam            | 7°- 12° - 15° - 25° - 30° - 40° - Elliptic - Special filter upon request  |
| Connection              | Connectors in the box   |
| Integrated power supply | 350mA to 700mA constant current driver integrated in the box  |
| Separate power supply   | 350mA to 1400mA constant current driver according to version<br>Dimmable driver upon request  |
| LED power               | 6W to 25W   |
| Use limitations         | The product must be installed into a ventilated area.<br>Any use with an ambient temperature higher than the specified ambient temperature<br>(Ta) would lead to a more rapid mortality of the product and the withdrawal of our<br>guarantees.<br>The drivers, if not delivered by LOuss, must be approved before use.   |
| Warranty                | Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature.<br>3-year parts and labour warranty.<br>The warranty does not apply to products that have been opened, modified or repaired<br>and does not cover the effects of a wrong connection, careless, abusive handling,<br>overvoltage, lighting injury, as well as the normal wear of the product.<br>All products are electrically tested and received a functional burn-in. |


## All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.




Last update : 03.03.2022

SARL, Capital 40 000€ RCS DIJON B 503 367 245 TVA/VAT n°: FR24 503 367 245 APE 4676Z Tel. : +33 380 48 65 68 contact@louss.fr www.louss.fr Best group Firalux & LOuss brands

Siège social / Head Office PA Les Terres d'Or Route de Saint Philibert 21220 Gevrey Chambertin - FRANCE

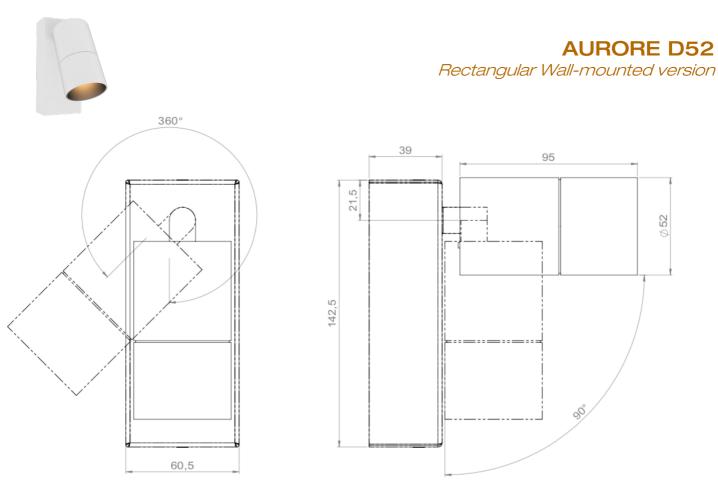

AURORE D52 Rectangular Wall-mounted – Lenght 95mm  $\leq$  13W

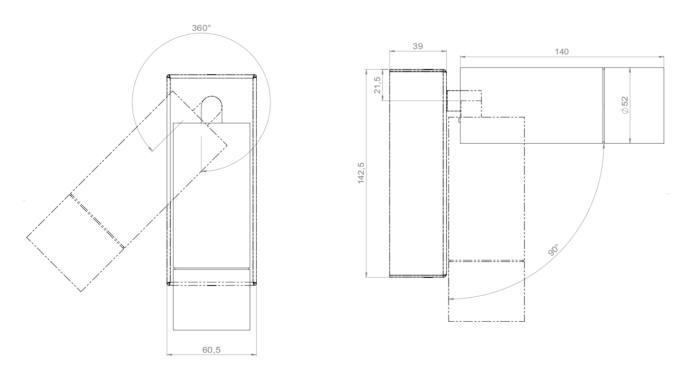

#### AURORE D52 Rectangular Wall-mounted – Lenght 140mm $\leq$ 13W

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.



Last update : 03.03.2022

#### Firalux & LOuss brands

SARL, Capital 40 000€ RCS DIJON B 503 367 245 TVA/VAT n°: FR24 503 367 245 APE 4676Z

Tel. : +33 380 48 65 68


contact@louss.fr

www.louss.fr

Best group

Siège social / Head Office PA Les Terres d'Or Route de Saint Philibert 21220 Gevrey Chambertin - FRANCE



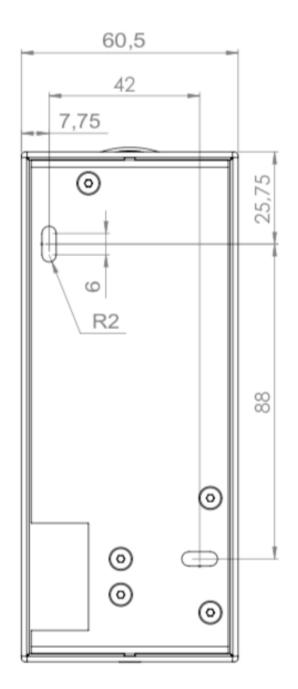

#### AURORE D52 Rectangular Wall-mounted - Wall-mounted fixing

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.



SARL, Capital 40 000€ RCS DIJON B 503 367 245 TVA/VAT n°: FR24 503 367 245 APE 4676Z Last update : 03.03.2022

Tel. : +33 380 48 65 68 contact@louss.fr www.louss.fr Best group Firalux & LOuss brands

Siège social / Head Office PA Les Terres d'Or Route de Saint Philibert 21220 Gevrey Chambertin - FRANCE