




ROUND WALL-MOUNTED



RECTANGULAR WALL-MOUNTED

## AURORE D60 WALL-MOUNTED






## AURORE D60 • Round Wall-Mounted • Rectangular Wall-Mounted

<b>Range</b>	Highly adjustable luminaires for general & accent lighting	
<b>Description</b>	Low luminance Rotation 360° - Adjustable tilt 90°	
<b>Finish</b>	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)	
	<b>Round Wall-Mounted</b>	<b>Rectangular Wall-Mounted</b>
<b>Dimensions</b>	Spotlight diameter : 52mm Spotlight length : 145mm Box diameter : 52mm	Spotlight diameter : 52mm Spotlight length : 140 mm Box dimensions : 142.5x61mm
<b>Net weight</b>	0.3kg	0.8kg
<b>LED characteristics</b>	2700K – 3000K – 3500K – 4000K – 5000K (other upon request) MacAdam ellipse : 3 SDCM (standard) – 2 SDCM (premium) CRI 90 (standard) – CRI 95, R9 > 90 (premium)	
<b>Optical beams</b>	7° - 12° - 15° - 25° - 30° - 40° - Asymmetrical – Elliptical UGR < 15	
<b>Accessoires</b>	Filters, honeycomb grid upon request	
<b>Luminous flux</b>	600 to 2,000 lumen according to version	
<b>Connection</b>	Delivered with 0.5m cable or connectors in the round or rectangular box	
<b>Separated Power supply</b>	Remote constant current driver 1400mA max. according to version Dimmable driver upon request	
<b>Integrated Power supply</b>	Rectangular wall-mounted : driver 700mA max. integrated in the box	
<b>Power</b>	6W to 25W according to version	
<b>Use limitations</b>	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use	
<b>Warranty</b>	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in	


All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged



## AURORE D60 ROUND WALL-MOUNTED

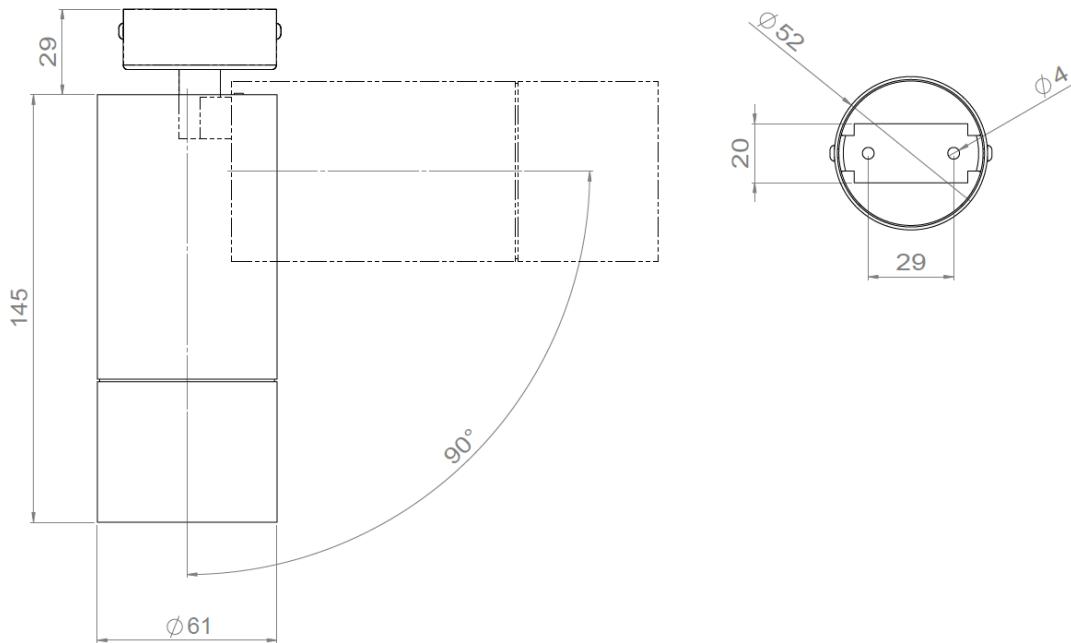

## AURORE D60 RECTANGULAR WALL-MOUNTED

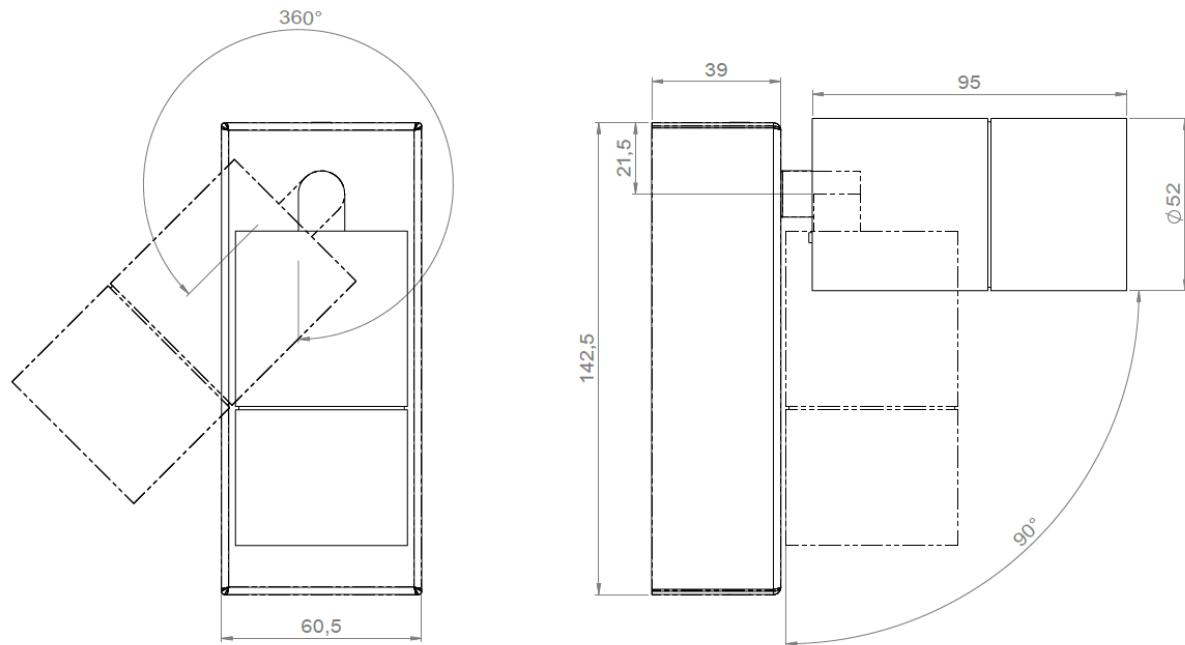

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged