



## AURORE D82 ON TRACK



## AURORE D82

## 230V TRACK

## 230V DALI TRACK



<b>Range</b>	Highly flexible spotlight on track for general & accent lighting	
<b>Description</b>	Low luminance 1 LED or 3 LEDs versions Rotation 360° - Adjustable tilt 90°	
<b>Finish</b>	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)	
<b>Dimensions</b>	<b>230V</b>	<b>230V DALI</b>
	Spotlight diameter : 81mm Spotlight length : 146mm Driver length : 162mm Track dimensions : 31.5 x 32.5mm	Spotlight diameter : 81mm Spotlight length : 146mm Driver length : 253.5mm Track dimensions : 31.5 x 32.5mm
<b>Net weight</b>	± 0.8 kg according to version	
<b>LED characteristics</b>	2700K - 3000K - 3500K - 4000K - 5000K (other upon request) Trio version : 2700K + 4000K + 6500K (no tunable white) MacAdam ellipse : 3 SDCM (standard) 2 SDCM (premium) CRI 90 (standard version) - CRI 95, R9 > 90 (premium version)	
<b>Optical beams</b>	7° - 12° - 15° - 25° - 30° - 40° - Elliptical UGR < 15	
<b>Accessories</b>	Filters, honeycomb grid upon request	
<b>Luminous flux</b>	700 to 2,500 lumen according to version	
<b>Power supply</b>	<b>230V</b>	<b>230V DALI</b>
	Track adapter suitable for Global Trac PRO XTS or similar (ERCO, Trajectoire...)	Track adapter suitable for Global Trac Pulse, STUCCHI, SLV...  Optional : CASAMBI-DALI gateway (see page 4)
<b>Power</b>	15W to 30W according to version	
<b>Use limitations</b>	The product must be installed in a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use	
<b>Warranty</b>	Life span : L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lightning injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in	

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged





## AUORE D82 ON TRACK 230V

Global Trac PRO 3-circuits track  
Warning: Dimensions may vary  
by a few mms from one  
manufacturer to another

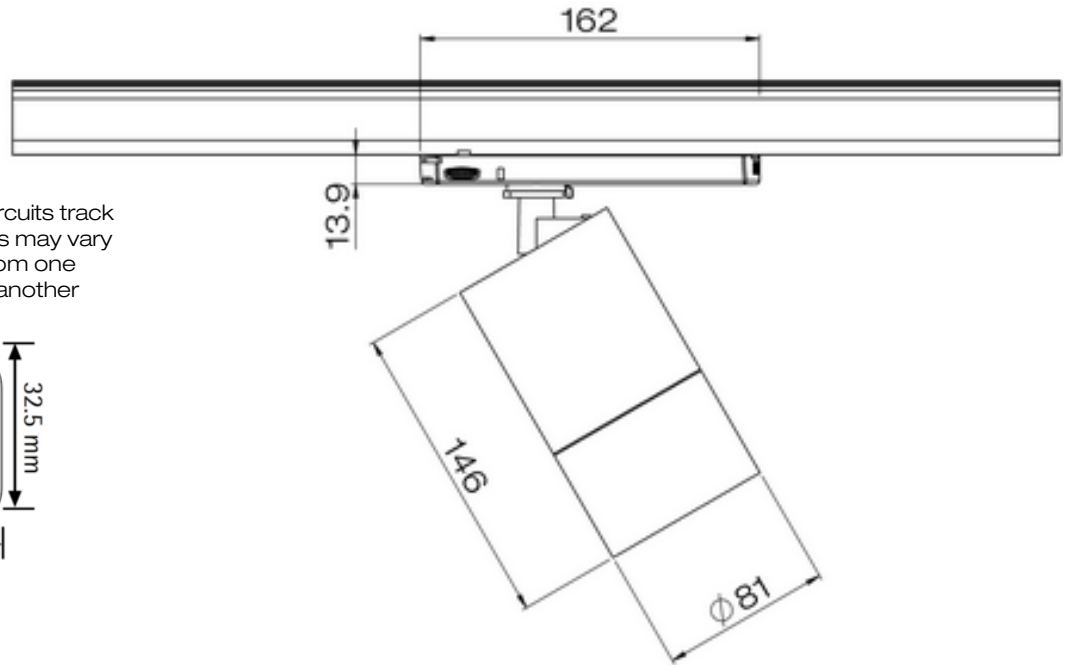

## AUORE D82 ON TRACK 230V DALI


Track DALI Global Trac pulse  
Warning: Dimensions may vary  
by a few mms from one  
manufacturer to another

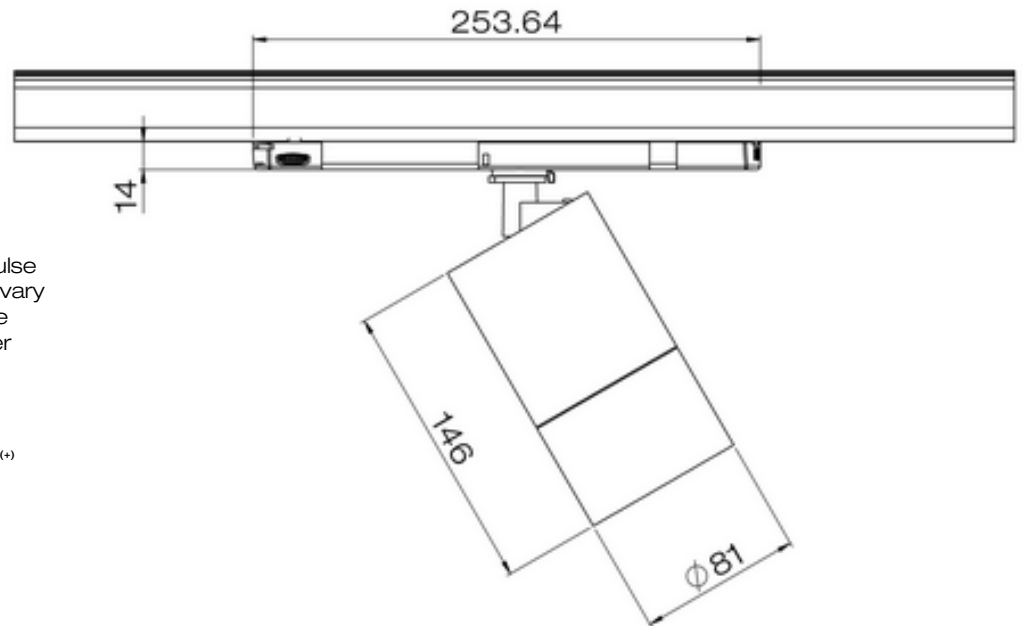

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged



# AURORE D82 230V TRACK CASAMBI-DALI Wiring system

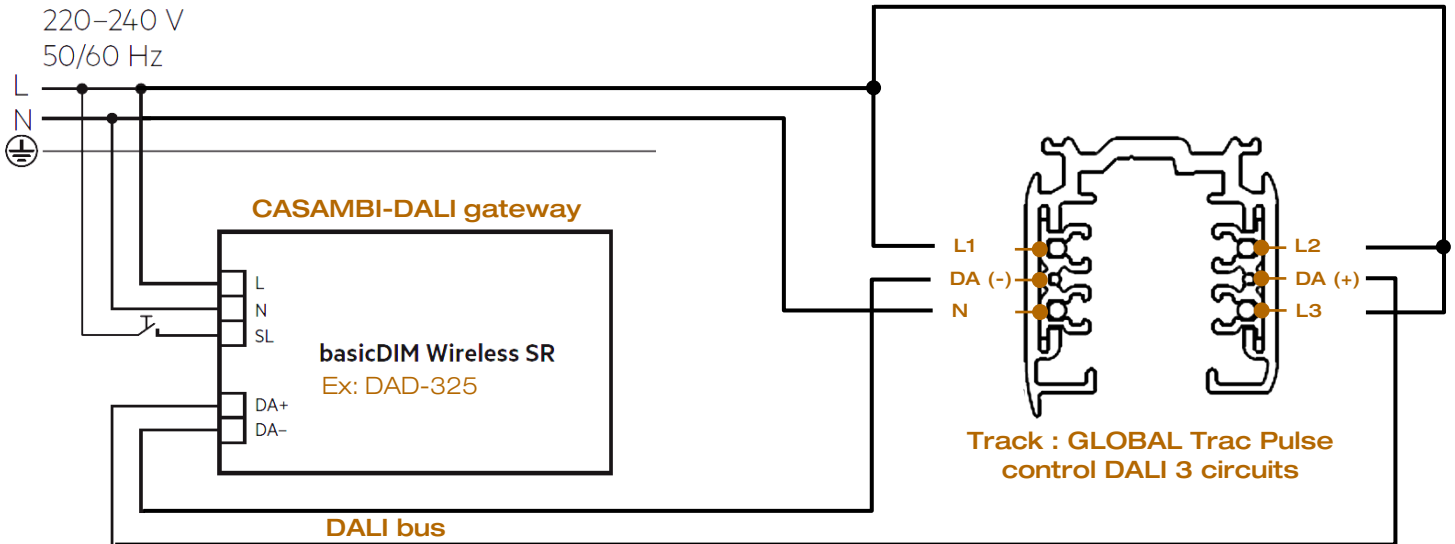

CAUTION : 25 drivers maximum per track

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged