lOuss


Firalux

AURORE ON TRACK




Best&lOuss


Index

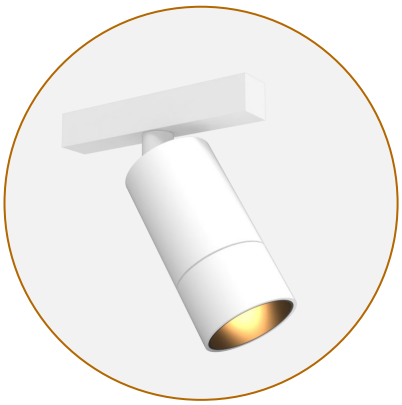


Aurore D40
3

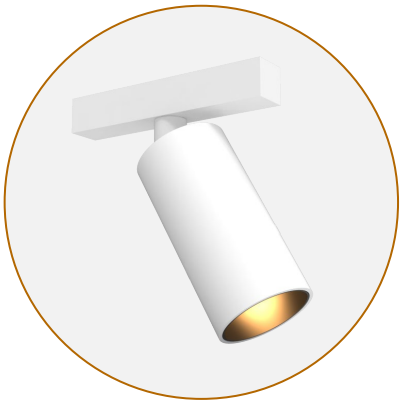

Aurore D42
10

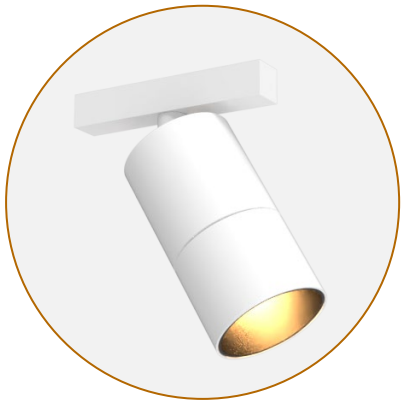

Aurore D52
16

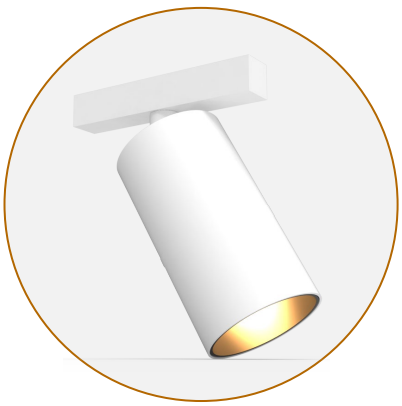

Aurore D55
22




Aurore D60
28




Aurore D82
32

Firalux
Lighting Emotion

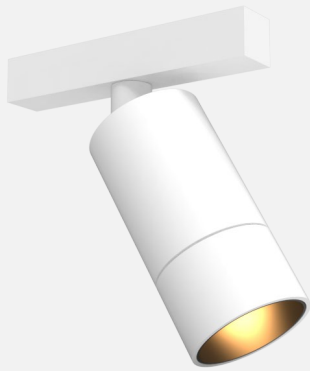

24/48V-S

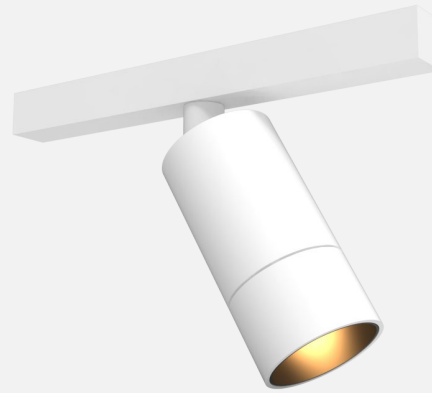

24/48V DALI



230V




230V DALI

AURORE D40 TRACK

Easy Swap System

indoor | IP20 | Ta 25° | CE | made in FRANCE






AURORE D40 ON TRACK • 24/48V-S • 24/48V Dali • 230V • 230V Dali


Range	Highly flexible spotlight on track for general & accent lighting	
Description	Low luminance Spotlight's body in painted aluminum Rotation 360° - Adjustable tilt 90° Optional : Easily changeable LED, optics and accessories on site, without any tool, with integrated **Easy Swap** system (see page 7)	
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)	
Dimensions	**24/48V-S • 24/48V DALI**	**230V • 230V DALI**
	Spotlight Diameter : 40mm Length : 80mm Driver's length : 98mm (ON/OFF) 166mm (DALI) **Stucchi Evo System Track** ST1 : 26.2 x 21.0mm	**Spotlight** Diameter : 40mm Length : 80mm Driver's length : 162mm (ON/OFF) 253.5mm (DALI) **Track** Dimensions : 31.5 x 35.5mm
Net weight	**24/48V-S • 24/48V DALI**	**230V • 230V DALI**
	Spotlight (driver included) ± 0.150 kg according to version **Stucchi Evo System Track** ST1 : 0.7 kg/m	**Spotlight (driver included)** ± 0.3 kg according to version **Track** ± 1 kg/m
LED characteristics	**24/48V-S • 24/48V DALI**	**230V • 230V DALI**
	MacAdam ellipse : 3 SDCM (standard) 2 SDCM (premium)	MacAdam ellipse : 3 SDCM
	2700K - 3000K – 3500K – 4000K – 5000K (other upon request) CRI90 (standard version) – CRI95, R9 > 80	
Optical beams	6° - 10° - 15° - 20° - 25° - 30° - 35° - 40° - 55° - 60° - Elliptical UGR < 15	
Accessories	Filters, honeycomb grid upon request	
Luminous flux	300 to 800 lumen according to version	

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE






AURORE D40 ON TRACK • 24/48V-S • 24/48V Dali • 230V • 230V Dali

	24/48V-S • DALI 24/48V	230V • DALI 230V
Power supply	Spot adaptator for 24/48V Stucchi Evo System track	230V : Track adapter suitable for Global Trac PRO XTS or simalar (ERCO, Trajectoire...) 230V DALI : • Track adapter suitable for Global Trac Pulse, STUCCHI, SLV... • Optional : CASAMBI-DALI gateway (see page 6)
Power	4W to 10W according to version	
Electric class	24/48V tracks : class 3 230V tracks : class 2	
Use limitations	The product must be installed in a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use	
Warranty	Life span : L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lightning injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in.	

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged


BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




AURORE D40 24/48V-S TRACK

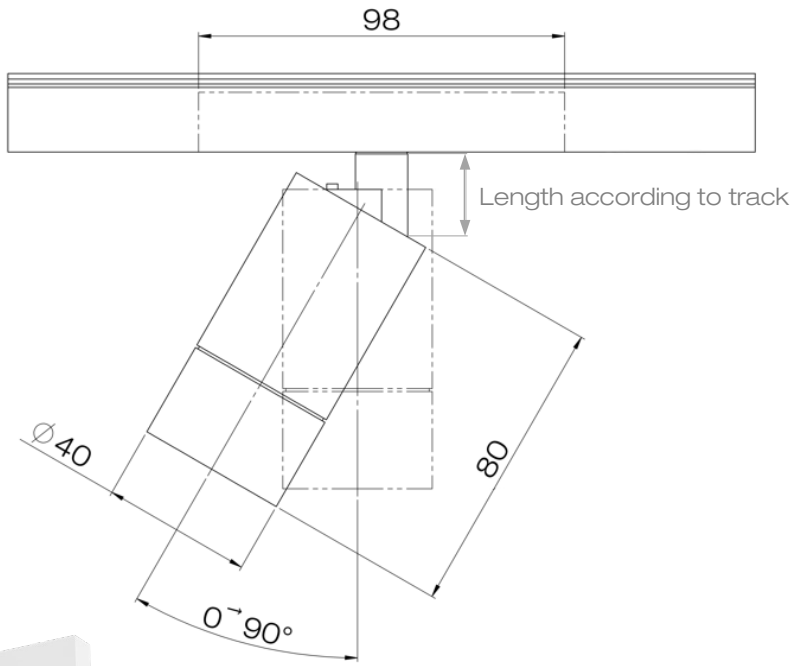


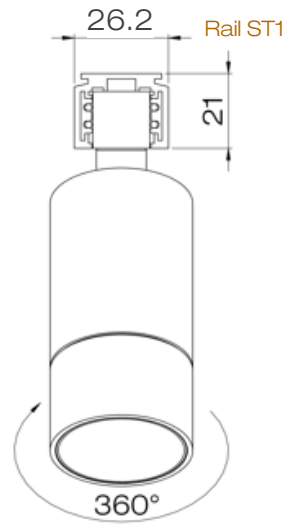



AURORE D40 24/48V DALI TRACK

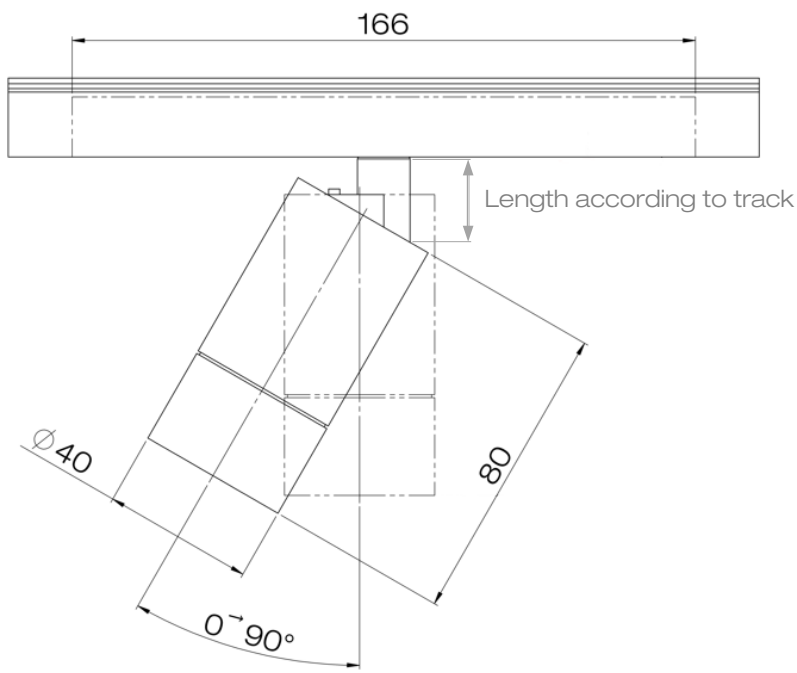

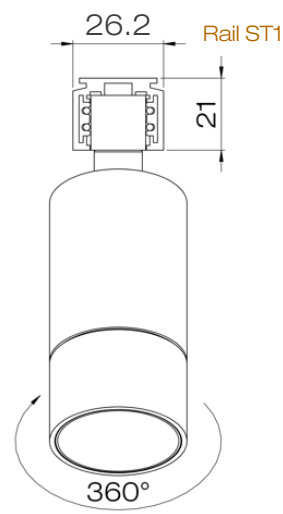

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D40 230V TRACK

Track Global Trac PRO
Warning: Dimensions may vary by a few mms from one manufacturer to another




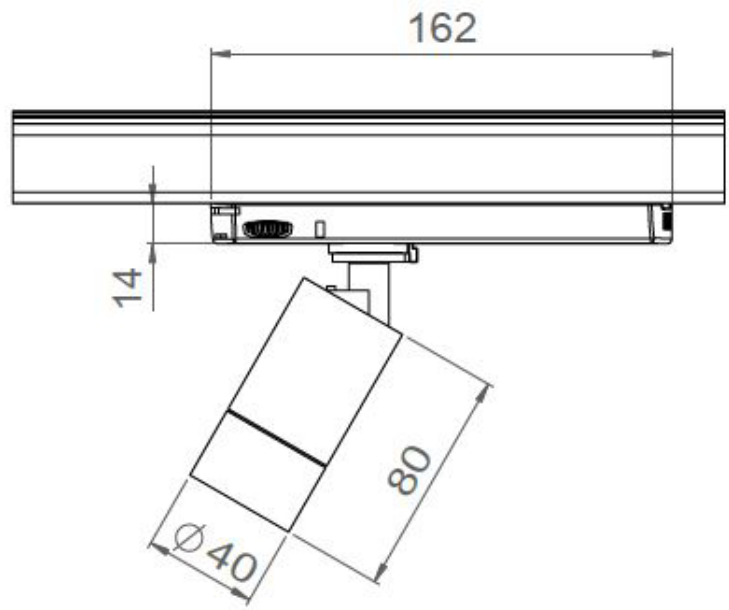




AURORE D40 230V DALI TRACK

Track DALI Global Trac pulse
Warning: Dimensions may vary by a few mms from one manufacturer to another



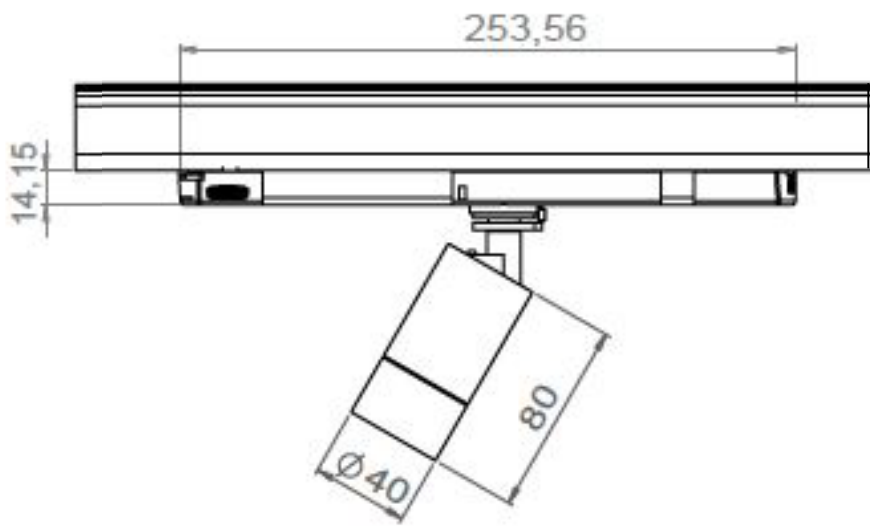

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged


BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D40 230V TRACK
CASAMBI-DALI
Wiring system

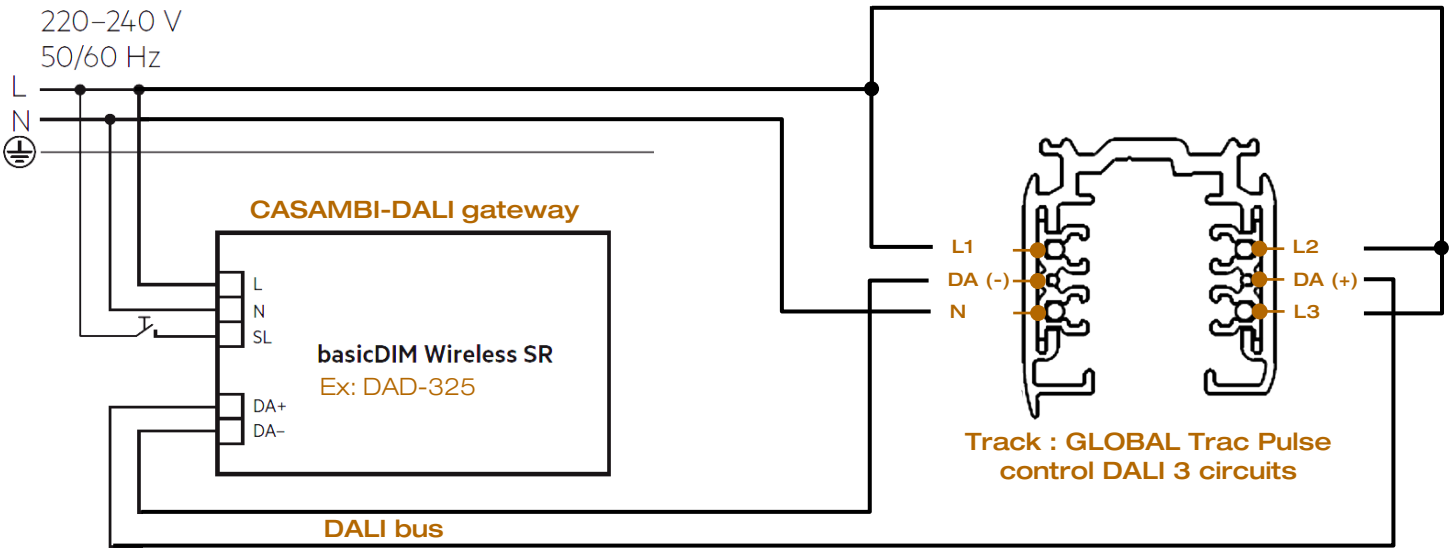

CAUTION : 25 drivers maximum per track


All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

lOuss

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE






AURORE D40 ON TRACK • 24/48V-S • 24/48V Dali • 230V • 230V Dali

Easy swap system



All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged


Creation : 2022.01.19 / Last update : 2025.10.30

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

Firalux
Lighting Emotion

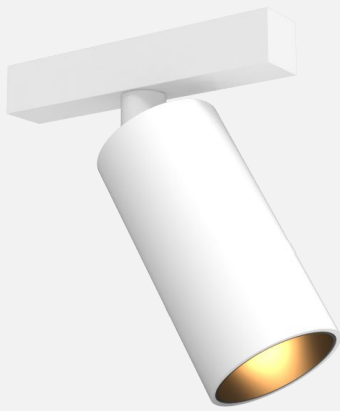

24/48V-S



24/48V DALI



230V



230V DALI

AURORE D42
ON TRACK

PERMUTO
Easy Swap System

indoor | IP20 | Ta 25° | made in FRANCE






AURORE D42 ON TRACK • 24/48V-S • 24/48V DALI • 230V • 230V DALI

<table>
<tr><td>Range</td><td colspan="2">Highly flexible spotlight on track for general & accent lighting</td></tr>
<tr><td>Description</td><td colspan="2">Low luminance
Spotlight's body in painted aluminum
Rotation 360° - Adjustable tilt 90°
Easily changeable LED, optics and accessories on site, without any tool, with integrated LOuss Permuto easy swap system (see page 6)</td></tr>
<tr><td>Finish</td><td colspan="2">White RAL 9003 matt finish
Black RAL 9005 matt finish
(other upon request)</td></tr>
<tr><td rowspan="2">Dimensions</td><td>24/48V-S • 24/48V DALI</td><td>230V • 230V DALI</td></tr>
<tr><td>Spotlight
Diameter : 42mm
Length : 80mm
Driver's length : 98mm (ON/OFF)
166mm (DALI)

Stucchi Evo System Track
ST1 : 26.2 x 21mm</td><td>Spotlight
Diameter : 42mm
Length : 80mm
Driver length : 162mm (ON/OFF 700mA)
228mm (ON/OFF 1,050mA)
253.5mm (DALI)

Track
Dimensions : 31.5 x 35.5mm</td></tr>
<tr><td rowspan="2">Net weight</td><td>24/48V-S • 24/48V DALI</td><td>230V • 230V DALI</td></tr>
<tr><td>Spotlight (driver included)
± 0.2 kg according to version

Stucchi Evo System Track
ST1 : 0.7 kg/m</td><td>Spotlight (driver included)
± 0.3 kg according to version

Track
± 1 kg/m</td></tr>
<tr><td rowspan="3">LED characteristics</td><td>24/48V-S • 24/48V DALI</td><td>230V • 230V DALI</td></tr>
<tr><td>MacAdam ellipse : 3 SDCM (standard)
2 SDCM (premium)</td><td>MacAdam ellipse : 3 SDCM</td></tr>
<tr><td colspan="2">2700K - 3000K – 3500K – 4000K – 5000K (other upon request)
CRI90 (standard version) – CRI95, R9 > 80</td></tr>
<tr><td>Optical beams</td><td colspan="2">6° - 10° - 15° - 20° - 25° - 30° - 35° - 40° - 55° - 60° - Elliptical
UGR < 15</td></tr>
<tr><td>Accessories</td><td colspan="2">Filters, honeycomb grid upon request</td></tr>
<tr><td>Luminous flux</td><td colspan="2">300 to 800 lumen according to version</td></tr>
</table>

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE






AURORE D42 ON TRACK • 24/48V-S • 24/48V DALI • 230V • 230V DALI

	24/48V-S • DALI 24/48V	230V • DALI 230V
Power supply	Spot adaptator for 24/48V Stucchi Evo System track	230V : Track adapter suitable for Global Trac PRO XTS or simalar (ERCO, Trajectoire...) 230V DALI : • Track adapter suitable for Global Trac Pulse, STUCCHI, SLV... • Optional : CASAMBI-DALI gateway (see page 5)
Power	4W to 10W according to version	
Electric class	24/48V tracks : class 3 230V tracks : class 2	
Use limitations	The product must be installed in a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use	
Warranty	Life span : L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lightning injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in.	

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged


BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D42 ON TRACK
24/48V-S • 24/48V DALI

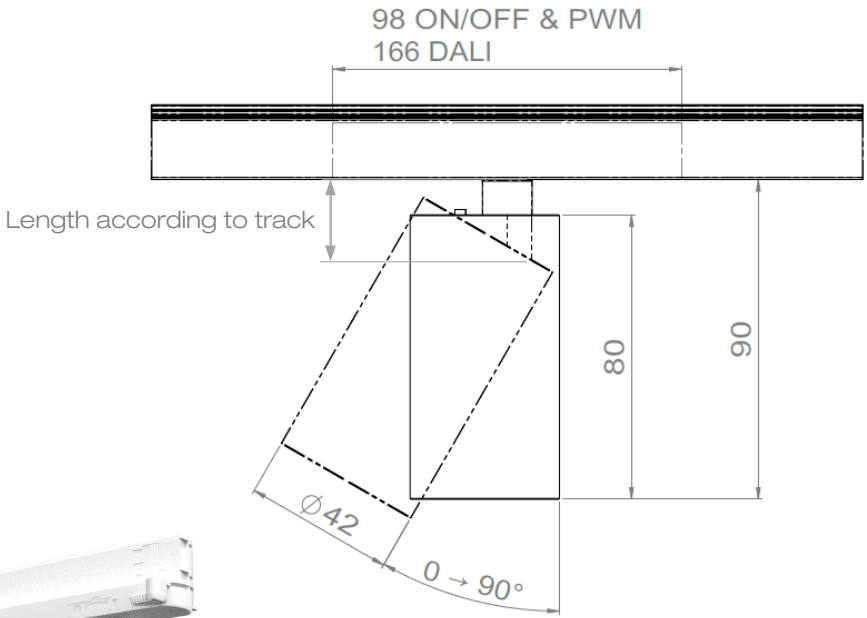


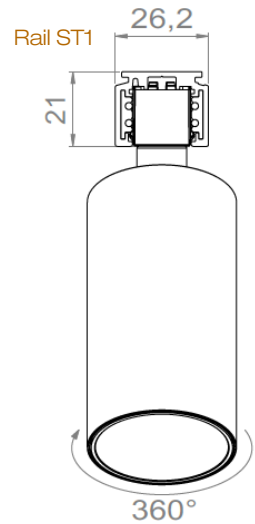





AURORE D42 ON TRACK
230V-S • 230V DALI


Track Global Trac PRO
Warning: Dimensions may vary by a few mms from one manufacturer to another



Track DALI Global Trac pulse
Warning: Dimensions may vary by a few mms from one manufacturer to another



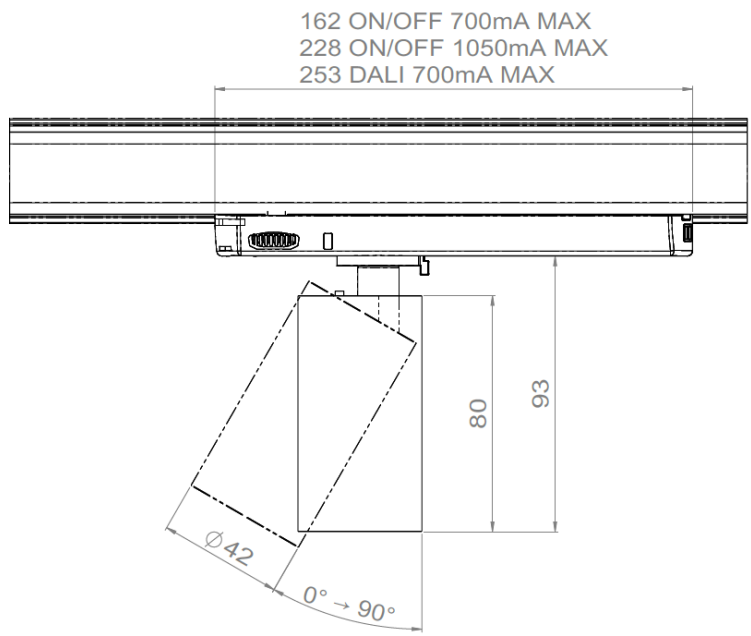

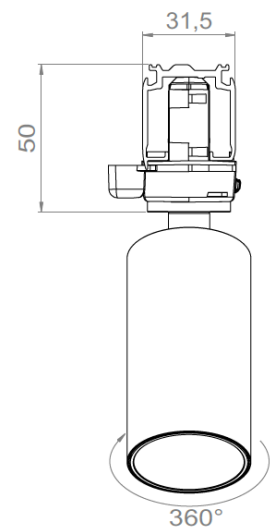

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged


BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D42 230V TRACK
CASAMBI-DALI
Wiring system

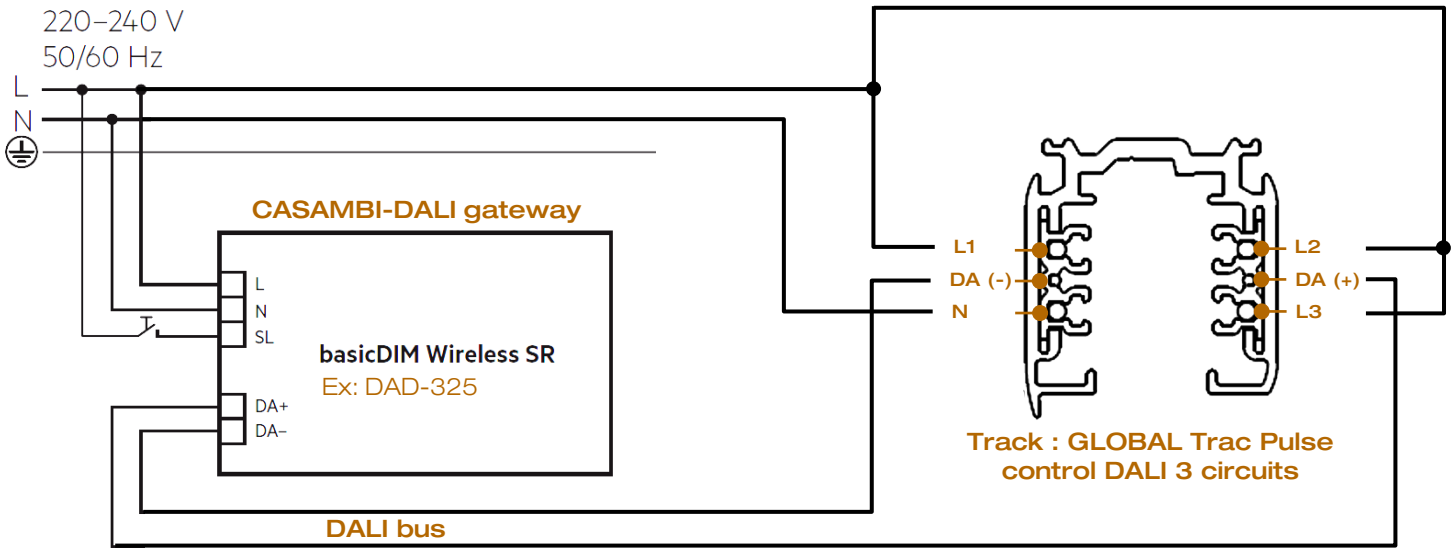


CAUTION : 25 drivers maximum per track

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE






AURORE D42 ON TRACK • 24/48V-S • 24/48V DALI • 230V • 230V DALI

LOuss **Permuto** – Easy swap system

PERMUTO
Easy Swap System



COB

Optics

Accessories (filters, honeycomb grid)

Spotlight's body

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

Firalux
Lighting Emotion



24/48V-S



24/48V DALI



230V



230V DALI

AURORE D52
TRACK

indoor | IP20 | Ta 25° | CE | made in FRANCE






AURORE D52 ON TRACK • 24/48V-S • 24/48V Dali • 230V • 230V Dali

Range	Highly flexible spotlight on track for general & accent lighting	
Description	Low luminance Spotlight's body in painted aluminum Rotation 360° - Adjustable tilt 90°	
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)	
Dimensions	**24/48V-S • DALI 24/48V**	**230V • DALI 230V**
	Spotlight Diameter : 52mm Length : 96mm (≤ 13W) 140mm (≤ 20W) Driver's length : 98mm (ON/OFF) 166mm (DALI) **Stucchi Evo System Track** ST1 : 26.2 x 21mm	**Spotlight** Diameter : 52mm Length : 96mm (≤ 13W) 140mm (≤ 20W) Driver's length : 162mm (ON/OFF) 253.5mm (DALI) **Track** Dimensions : 31.5 x 35.5mm
Net weight	**24/48V-S • DALI 24/48V**	**230V • DALI 230V**
	Spotlight (driver included) ± 0.270 kg according to version **Stucchi Evo System Track** ST1 : 0.7 kg/m	**Spotlight (driver included)** ± 0.5 kg according to version **Track** ± 1 kg/m
LED characteristics	2700K - 3000K – 3500K – 4000K – 5000K (other upon request) MacAdam ellipse : 3 SDCM (standard) 2 SDCM (premium) CRI 90 – 95 - 98	
Optical beams	7° - 12° - 15° - 20° - 25° - 30° - 35° - Elliptical UGR < 15	
Accessories	Filters, honeycomb grid, chamfered spotlight body upon request	
Luminous flux	**24/48V-S • 24/48V DALI**	**230V • 230V DALI**
	600 to 1,200 lumen according to version	600 to 2,000 lumen according to version

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

Creation : 2020.05.19 / Last update : 2025.10.30

lOuss

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE






AURORE D52 ON TRACK • 24/48V-S • 24/48V Dali • 230V • 230V Dali

	24/48V-S • DALI 24/48V	230V • DALI 230V
Integrated Power supply	Spot adaptator for 24/48V Stucchi Evo System track	230V : Track adapter suitable for Global Trac PRO XTS or simalar (ERCO, Trajectoire...) 230V DALI : • Track adapter suitable for Global Trac Pulse, STUCCHI, SLV... • Optional : CASAMBI-DALI gateway (see page 6)
Power	≤ 18W LED (20W driver included) according to version	
Power Consumption	6W to 25W according to version	
Electric class	24/48V tracks : class 3 230V tracks : class 2	
Use limitations	The product must be installed in a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use	
Warranty	Life span : L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lightning injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in	

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged


BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




AURORE D52 24/48V-S TRACK

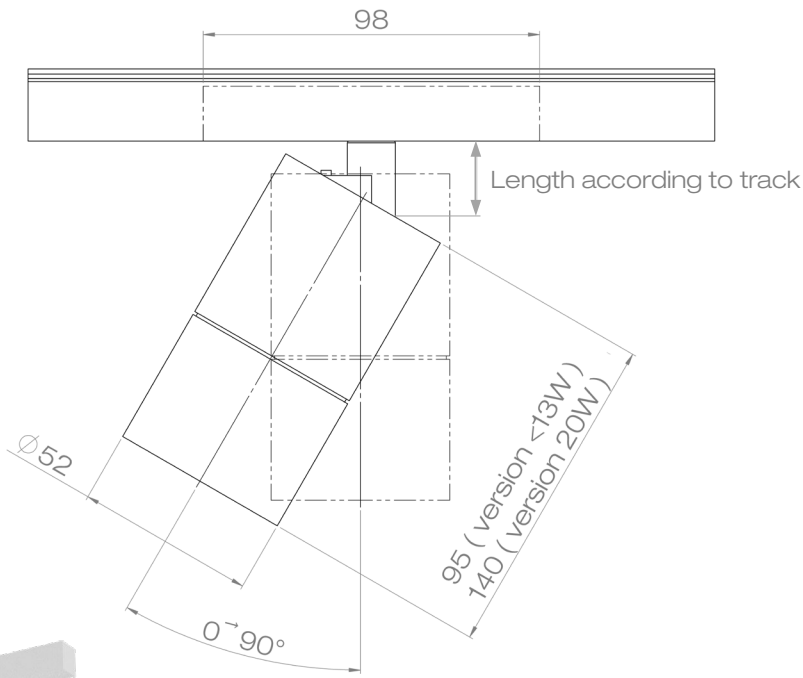


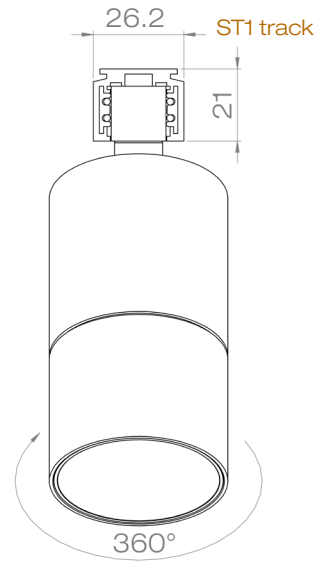



AURORE D52 24/48V DALI TRACK

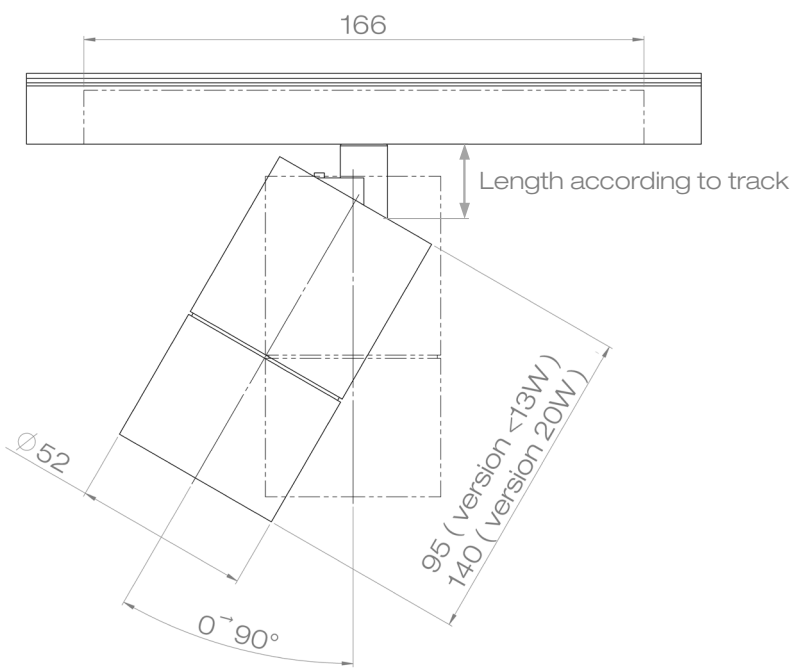

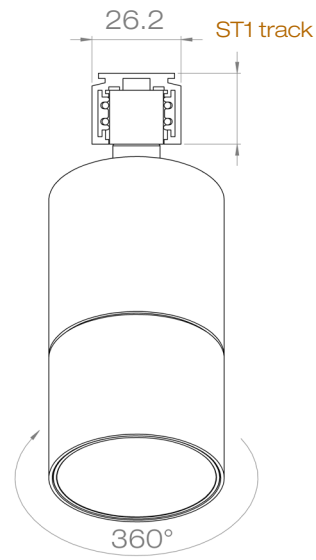

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Creation : 2020.05.19 / Last update : 2025.10.30

lOuss

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D52 230V TRACK


Track Global Trac PRO
Warning: Dimensions may vary by a few mms from one manufacturer to another



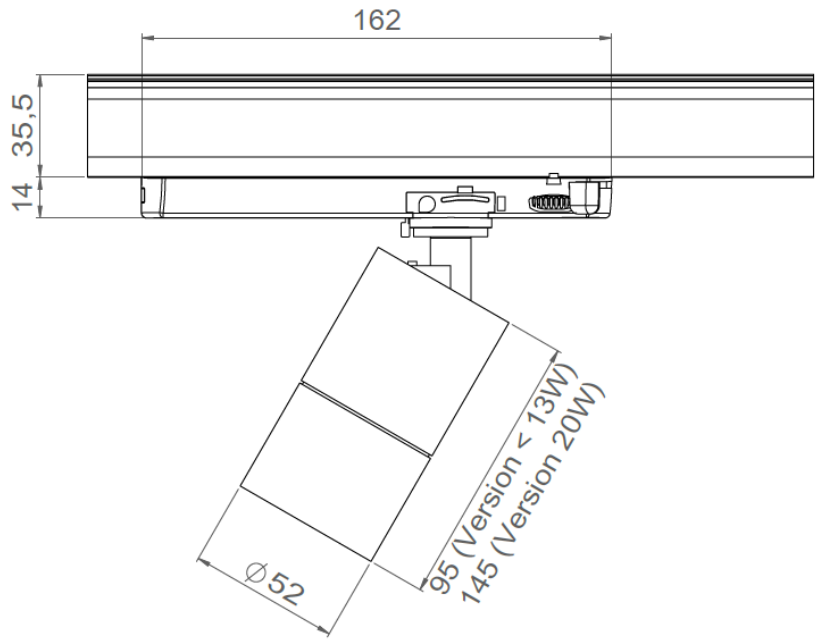





AURORE D52 230V DALI TRACK

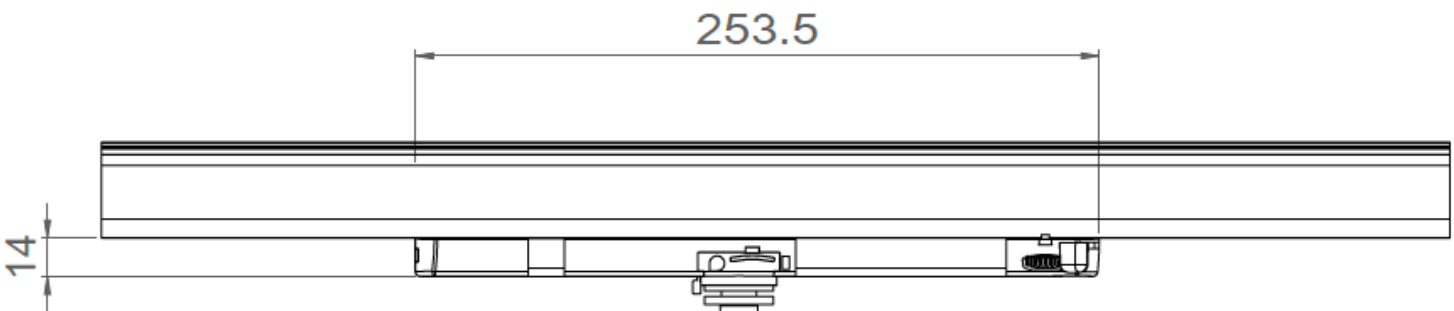

Track DALI Global Trac pulse
Warning: Dimensions may vary by a few mms from one manufacturer to another



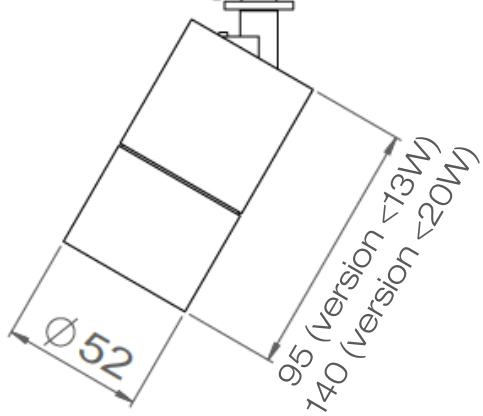

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

Creation : 2020.05.19 / Last update : 2025.10.30

lOuss


BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D52 230V TRACK
CASAMBI-DALI
Wiring system

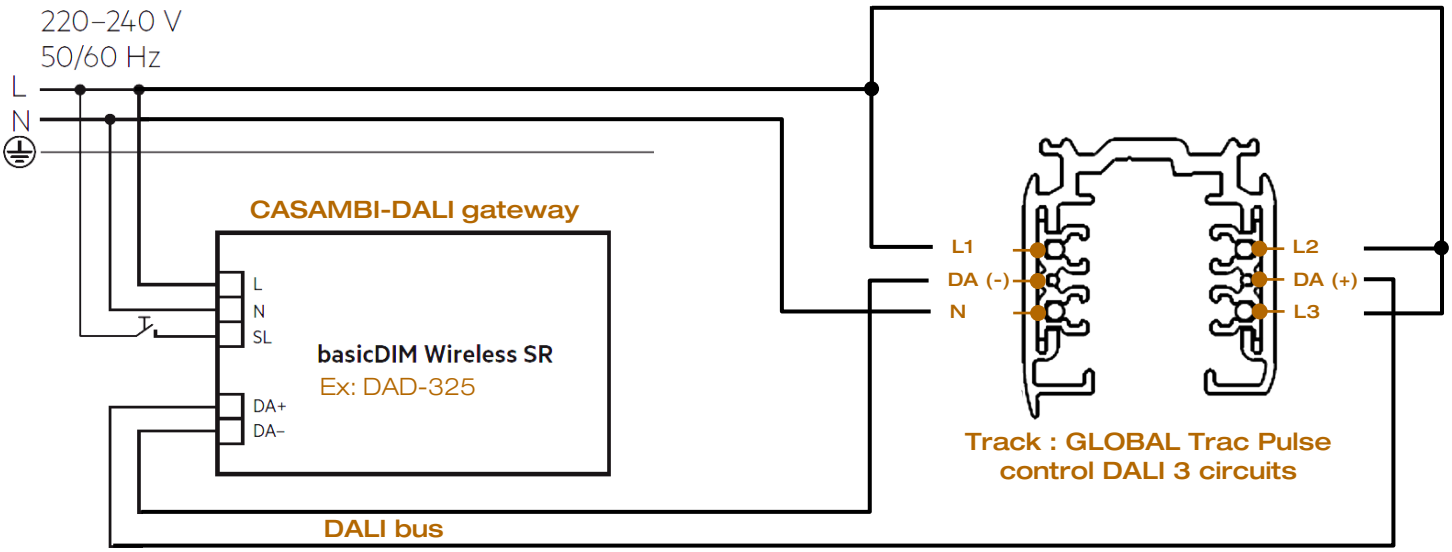

CAUTION : 25 drivers maximum per track

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

Firalux
Lighting Emotion



24/48V-S



24/48V DALI



230V



230V DALI

AURORE D55
ON TRACK

PERMUTO
Easy Swap System

indoor | IP40 | Ta 25° | CE | made in FRANCE






AURORE D55 ON TRACK • 24/48V-S • 24/48V Dali • 230V • 230V Dali

<table>
<tr><td>Range</td><td colspan="2">Highly flexible spotlight on track for general & accent lighting</td></tr>
<tr><td>Description</td><td colspan="2">Low luminance
Spotlight's body in painted aluminum
Rotation 360° - Adjustable tilt 90°
Easily changeable LED, optics and accessories on site, without any tool, with integrated LOuss Permuto easy swap system (see page 6)</td></tr>
<tr><td>Finish</td><td colspan="2">White RAL 9003 matt finish
Black RAL 9005 matt finish
(other upon request)</td></tr>
<tr><td rowspan="2">Dimensions</td><td>24/48V-S • 24/48V DALI</td><td>230V • 230V DALI</td></tr>
<tr><td>Spotlight
Diameter : 55mm
Length : 95mm
Driver's length : 98mm (ON/OFF)
166mm (DALI)

Stucchi Evo System Track
ST1 : 26.2 x 21mm</td><td>Spotlight
Diameter : 55mm
Length : 95mm
Driver length : 162mm (ON/OFF 700mA)
228mm (ON/OFF 1,050mA)
253.5mm (DALI)

Track
Dimensions : 31.5 x 35.5mm</td></tr>
<tr><td rowspan="2">Net weight</td><td>24/48V-S • 24/48V DALI</td><td>230V • 230V DALI</td></tr>
<tr><td>Spotlight (driver included)
± 0.3 kg according to version

Stucchi Evo System Track
ST1 : 0.7 kg/m</td><td>Spotlight (driver included)
± 0.5 kg according to version

Track
± 1 kg/m</td></tr>
<tr><td rowspan="3">LED characteristics</td><td>24/48V-S • 24/48V DALI</td><td>230V • 230V DALI</td></tr>
<tr><td>MacAdam ellipse : 3 SDCM (standard)
2 SDCM (premium)</td><td>MacAdam ellipse : 3 SDCM</td></tr>
<tr><td colspan="2">2700K - 3000K – 3500K – 4000K – 5000K (other upon request)
CRI 90 – 95 – 98</td></tr>
<tr><td>Optical beams</td><td colspan="2">13° - 18° - 24° - 32° (CRI < 98)
7° (CRI 90)
UGR < 15</td></tr>
<tr><td>Accessories</td><td colspan="2">Filters, honeycomb grid upon request</td></tr>
<tr><td rowspan="2">Luminous flux</td><td>24/48V-S • 24/48V DALI</td><td>230V • 230V DALI</td></tr>
<tr><td>600 to 1,200 lumen according to version</td><td>600 to 2,000 lumen according to version</td></tr>
</table>

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE






AURORE D55 ON TRACK • 24/48V-S • 24/48V Dali • 230V • 230V Dali


	24/48V-S • DALI 24/48V	230V • DALI 230V
Power supply	Spot adaptator for 24/48V Stucchi Evo System track	230V : Track adapter suitable for Global Trac PRO XTS or simalar (ERCO, Trajectoire...) 230V DALI : • Track adapter suitable for Global Trac Pulse, STUCCHI, SLV... • Optional : CASAMBI-DALI gateway (see page 6)
Power	6W to 25W according to version	
Electric class	24/48V tracks : class 3 230V tracks : class 2	
Use limitations	The product must be installed in a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use	
Warranty	Life span : L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lightning injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in.	

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged


BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D55 ON TRACK
24/48V-S • 24/48V DALI

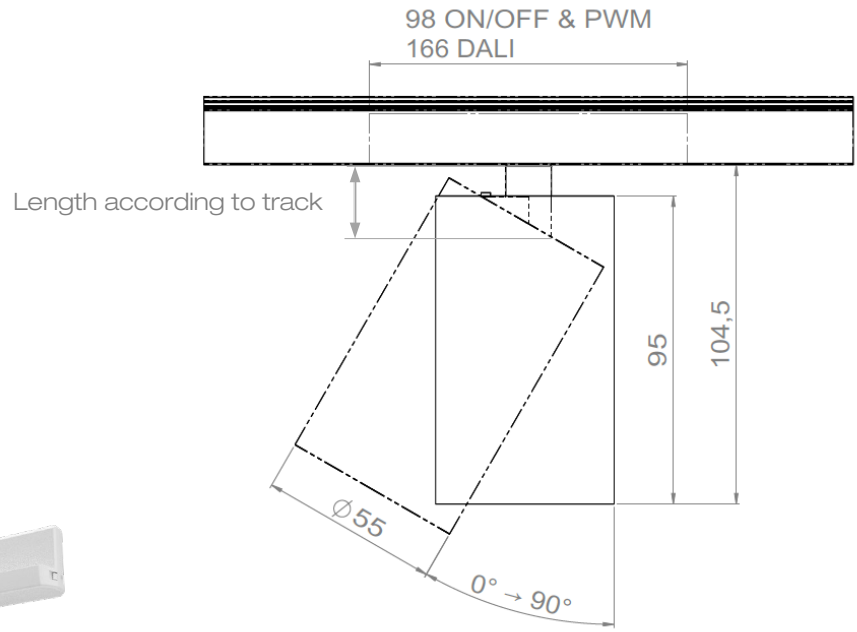


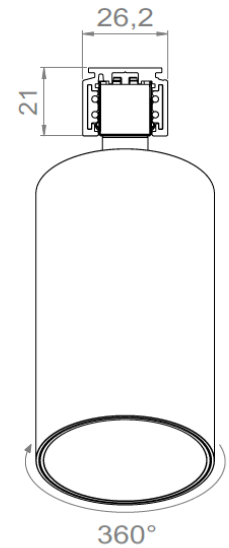





AURORE D55 ON TRACK
230V • 230V DALI


Track Global Trac PRO
Warning: Dimensions may vary by a few mms from one manufacturer to another



Track DALI Global Trac pulse
Warning: Dimensions may vary by a few mms from one manufacturer to another



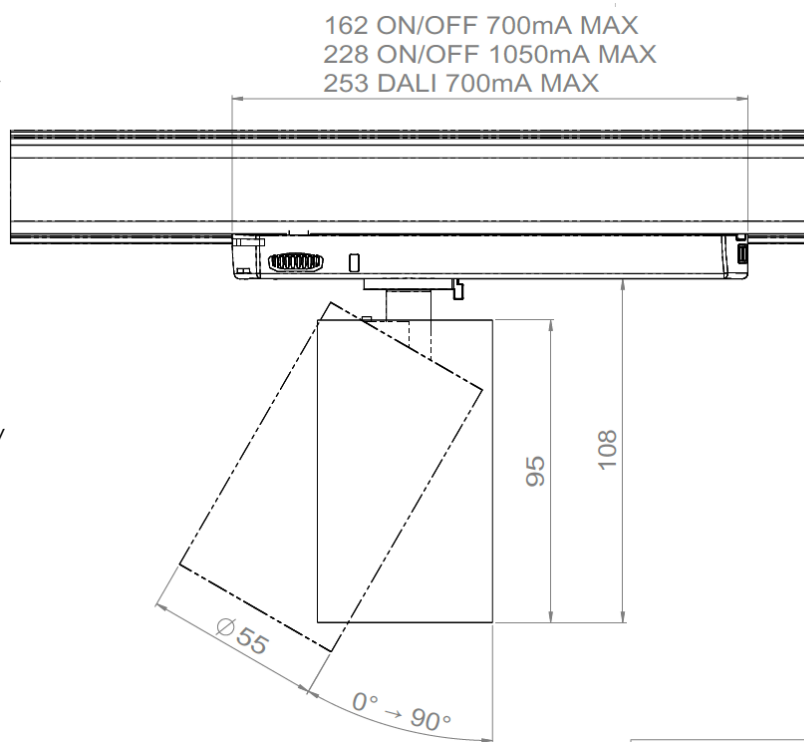

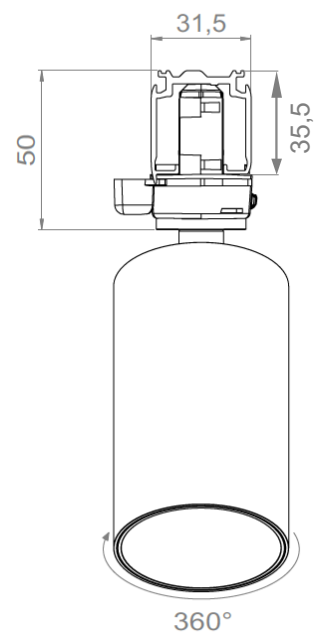

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged


BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D55 230V TRACK
CASAMBI-DALI
Wiring system

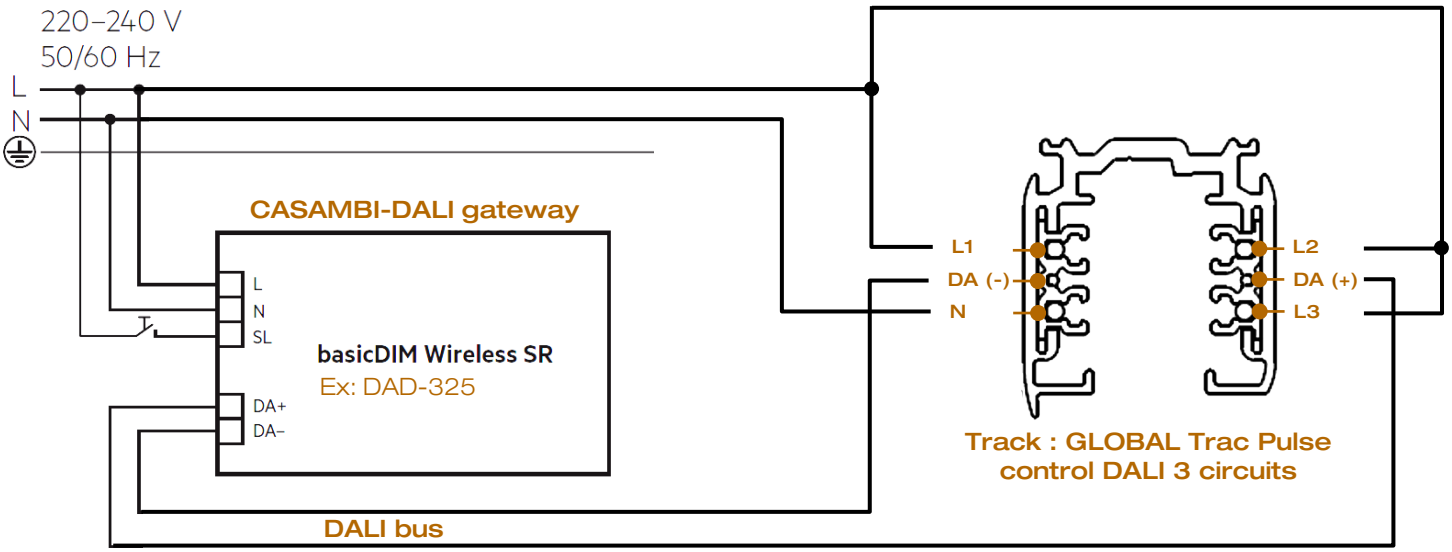

CAUTION : 25 drivers maximum per track

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE






AURORE D55 ON TRACK • 24/48V-S • 24/48V Dali • 230V • 230V Dali

LOuss **Permuto** – Easy swap system



LED / COB

Optics

Accessories (filters, honeycomb grid)

Spotlight's body

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

Firalux
Lighting Emotion



230V



230V DALI

AURORE D60
ON TRACK

indoor | IP20 | Ta 25° | CE | made in FRANCE





AURORE D60 • 230V TRACK • 230V DALI TRACK

Range	Highly flexible spotlight on track for general & accent lighting	
Description	Low luminance Spotlight's body in painted aluminum Rotation 360° - Adjustable tilt 90°	
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)	
Dimensions	**230V**	**230V DALI**
	Spotlight diameter : 61mm Spotlight length : 145mm Driver length : 162mm Track dimensions : 31.5 x 32.5mm	Spotlight diameter : 61mm Spotlight length : 145mm Driver length : 228mm Track dimensions : 31.5 x 32.5mm
Net weight	± 0.5 kg according to version	
LED characteristics	2700K - 3000K – 3500K – 4000K – 5000K (other upon request) MacAdam ellipse : 3 SDCM (standard) 2 SDCM (premium) CRI 90 (standard version) – CRI 95, R9 > 90 (premium version)	
Optical beams	7° - 12° - 15° - 20° - 25° - 30° - 35° - Elliptical UGR < 15	
Accessories	Filters, honeycomb grid upon request	
Luminous flux	600 to 2,000 lumen according to version	
Power supply	**230V**	**230V DALI**
	Track adapter suitable for Global Trac PRO XTS or simalar (ERCO, Trajectoire...)	Track adapter suitable for Global Trac Pulse, STUCCHI, SLV... Optional : CASAMBI-DALI gateway (see page 4)
Power	6W to 25W according to version	
Use limitations	The product must be installed in a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use	
Warranty	Life span : L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lightning injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in	

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D60 ON TRACK 230V

Global Trac PRO 3-circuits track
Warning: Dimensions may vary by a few mms from one manufacturer to another




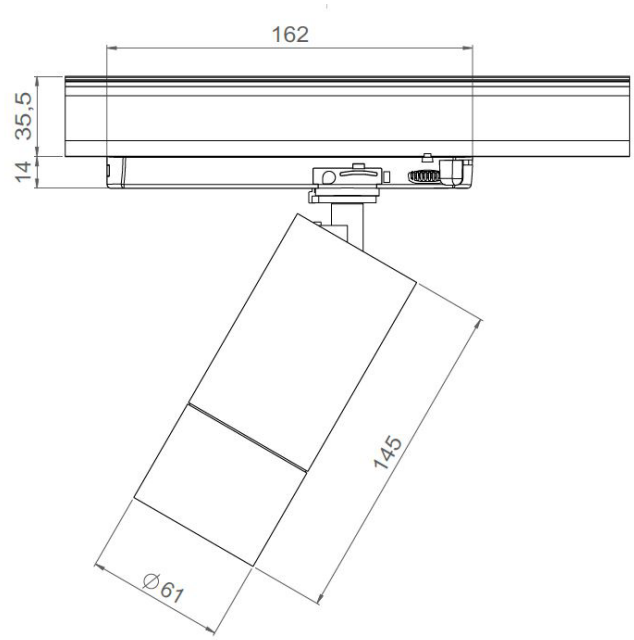




AURORE D60 ON TRACK 230V DALI

Track DALI Global Trac pulse
Warning: Dimensions may vary by a few mms from one manufacturer to another



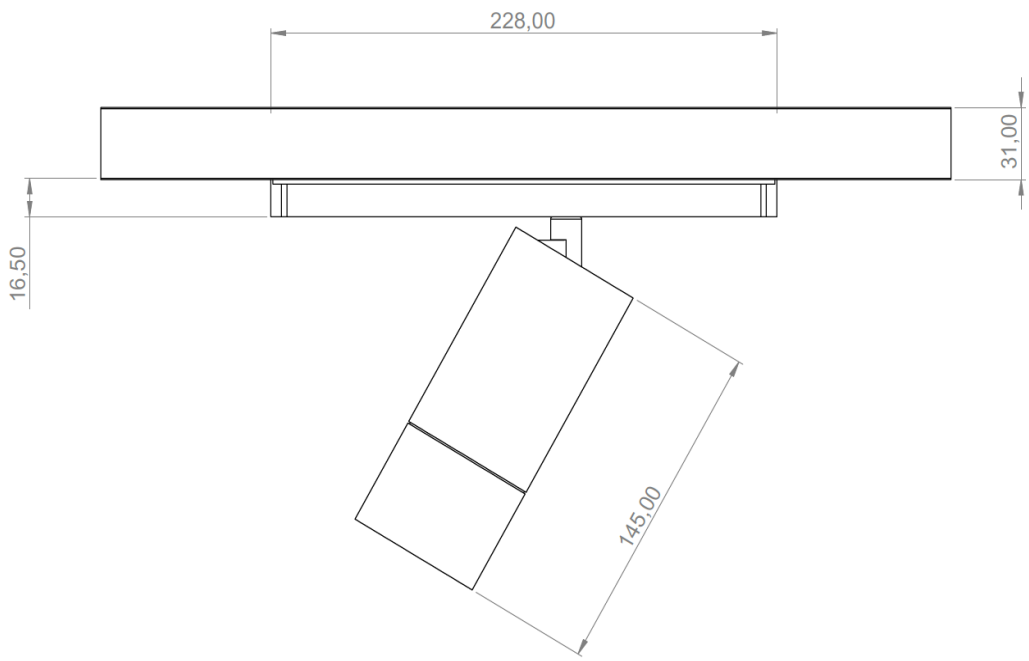

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

Creation : 2019.07.11 / Last update : 2025.09.25

lOuss


BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D60 230V TRACK
CASAMBI-DALI
Wiring system

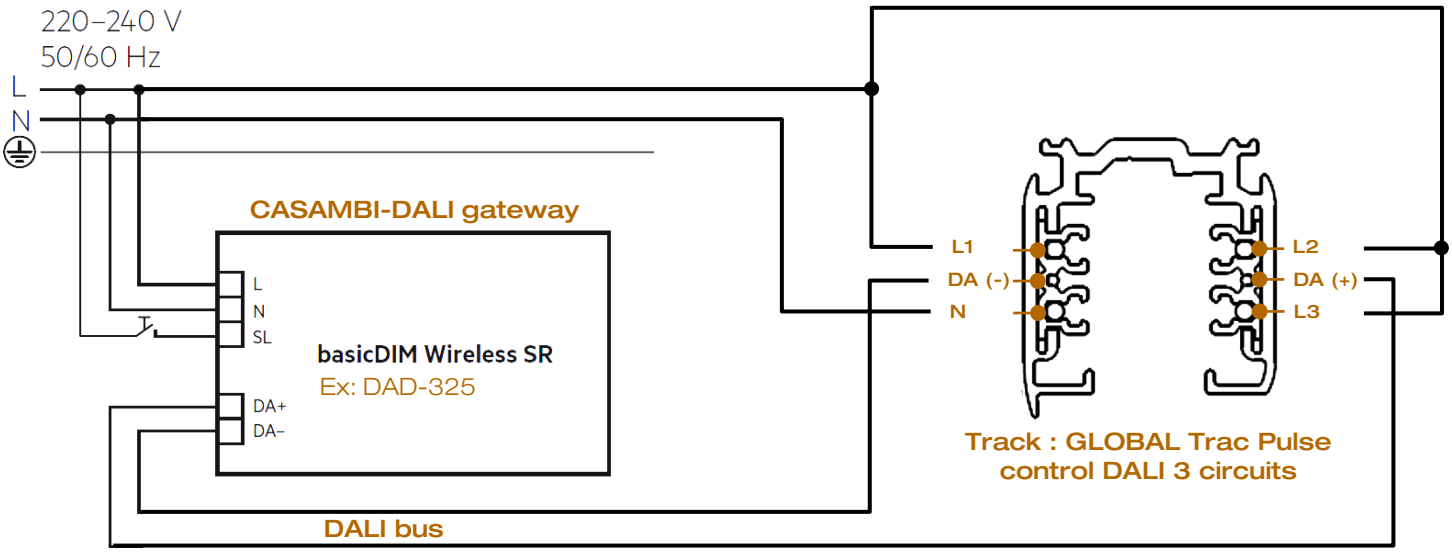

CAUTION : 25 drivers maximum per track

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

Firalux
Lighting Emotion



230V



230V DALI

AURORE D82
ON TRACK

indoor | IP20 | Ta 25° | CE | made in FRANCE





AURORE D82 • 230V TRACK • 230V DALI TRACK

Range	Highly flexible spotlight on track for general & accent lighting	
Description	Low luminance Spotlight's body in painted aluminum 1 LED or 3 LEDs versions Rotation 360° - Adjustable tilt 90°	
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)	
Dimensions	**230V**	**230V DALI**
	Spotlight diameter : 81mm Spotlight length : 146mm Driver length : 162mm Track dimensions : 31.5 x 32.5mm	Spotlight diameter : 81mm Spotlight length : 146mm Driver length : 253.5mm Track dimensions : 31.5 x 32.5mm
Net weight	± 0.8 kg according to version	
LED characteristics	2700K - 3000K – 3500K – 4000K – 5000K (other upon request) Trio version : 2700K + 4000K + 6500K (no tunable white) MacAdam ellipse : 3 SDCM (standard) 2 SDCM (premium) CRI 90 (standard version) – CRI 95, R9 > 90 (premium version)	
Optical beams	7° - 12° - 15° - 25° - 30° - 40° - Elliptical UGR < 15	
Accessories	Filters, honeycomb grid upon request	
Luminous flux	700 to 2,500 lumen according to version	
Power supply	**230V**	**230V DALI**
	Track adapter suitable for Global Trac PRO XTS or simalar (ERCO, Trajectoire...)	Track adapter suitable for Global Trac Pulse, STUCCHI, SLV... Optional : CASAMBI-DALI gateway (see page 4)
Power	15W to 30W according to version	
Use limitations	The product must be installed in a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use	
Warranty	Life span : L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lightning injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in	

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged


BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D82 ON TRACK 230V

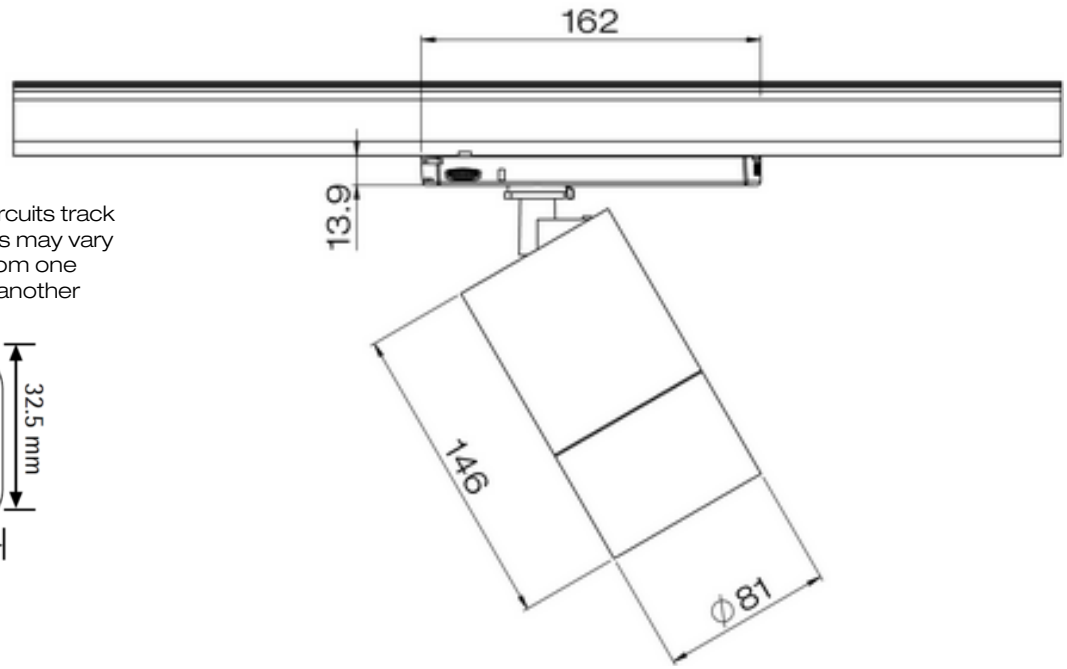


Global Trac PRO 3-circuits track
Warning: Dimensions may vary by a few mms from one manufacturer to another






AURORE D82 ON TRACK 230V DALI

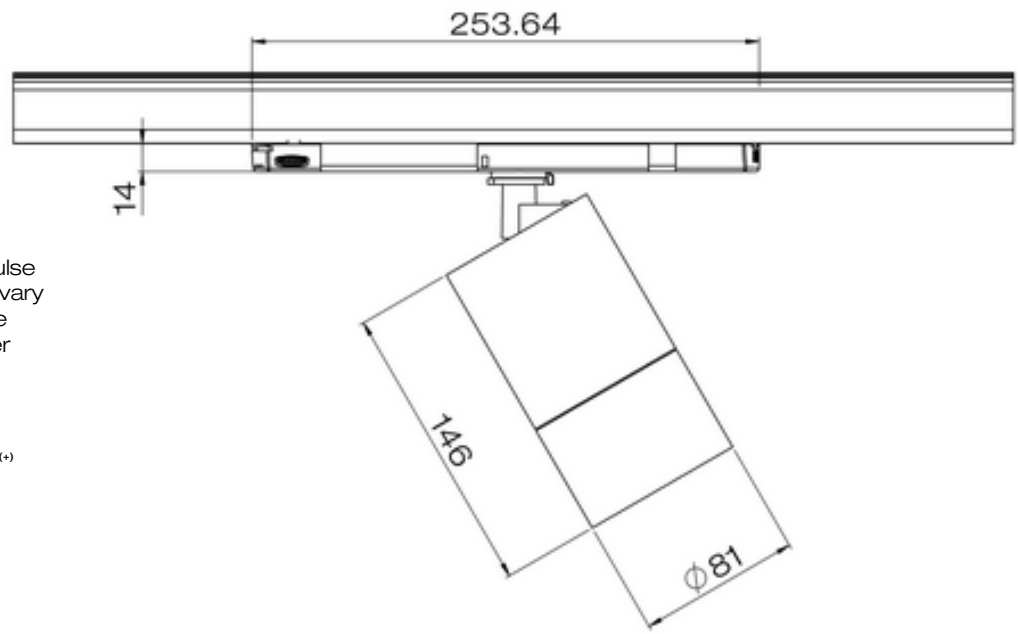

Track DALI Global Trac pulse
Warning: Dimensions may vary by a few mms from one manufacturer to another



All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged


BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D82 230V TRACK
CASAMBI-DALI
Wiring system

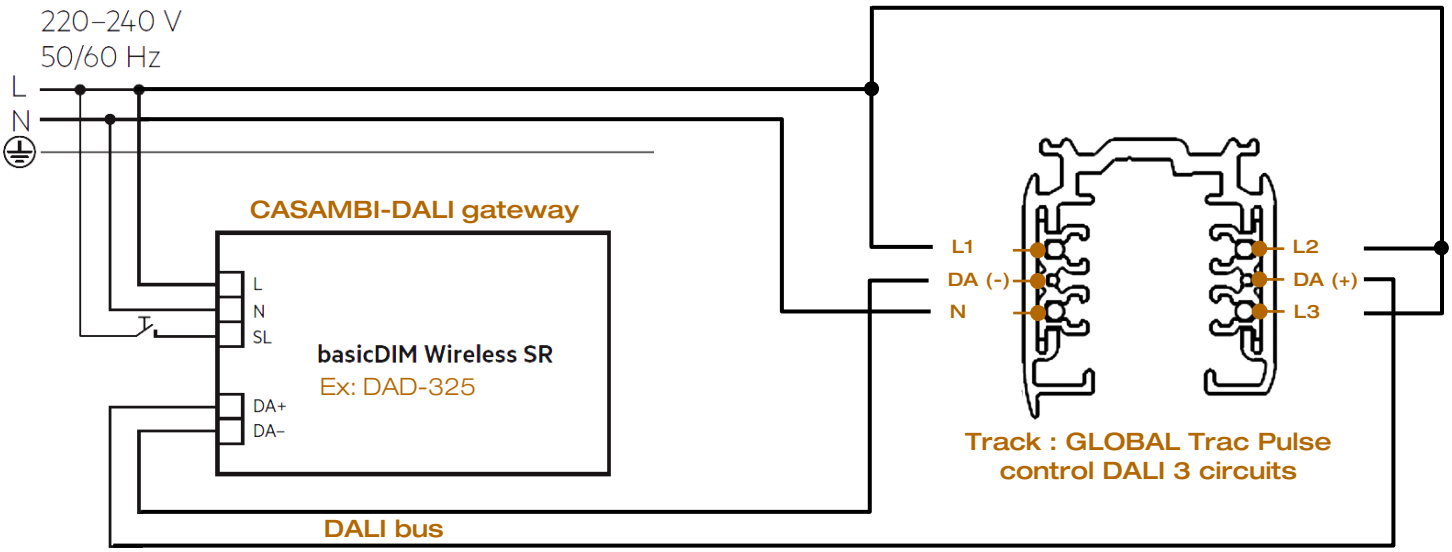

CAUTION : 25 drivers maximum per track

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best&LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE