

AURORE TRACK RANGE

CONTENTS

AURORE D40

AURORE D42

AURORE D52

AURORE D55

AURORE D60

AURORE D82

2

8

13

18

23


26



48V-S Track




230V Track

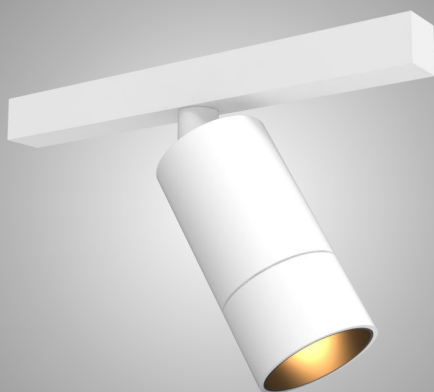

48V DALI Track



230V DALI Track

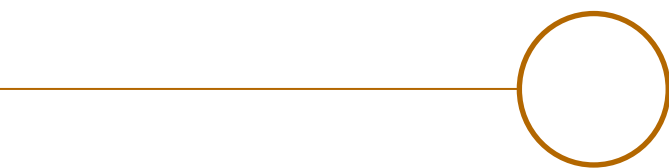

AURORE D40 TRACK



AUORE D40 • 48V-S Track • 230V Track • 48V DALI Track • 230V DALI Track

Range	Highly flexible spotlight on track for general & accent lighting	
Description	Low luminance Rotation 360° - Adjustable tilt 90° Optional : Easily changeable LED, optics and accessories on site, without any tool, with integrated Easy Swap system (see page 6)	
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)	
Dimensions	48V Stucchi Track	230V Track
	Spotlight diameter : 40mm Height : 90mm Driver length : 98mm Track dimensions : 26.4 x 21mm	Spotlight diameter : 40mm Height : 90mm Driver length : 162mm Track dimensions : 31.5 x 32.5mm
	48V DALI Track	230V DALI Track
	Spotlight diameter : 40mm Height : 90mm Driver length : 166mm Track dimensions : 26.4 x 21mm	Spotlight diameter : 40mm Height : 90mm Driver length : 253.5mm Track dimensions : 31.5 x 32.5mm
Net weight	± 0.3 kg according to version	
LED characteristics	48V	230V
	MacAdam ellipse : 3 SDCM (standard) 2 SDCM (premium)	MacAdam ellipse : 3 SDCM
	2700K - 3000K – 3500K – 4000K – 5000K (other upon request) CRI90 (standard version) – CRI95, R9 > 80	
Optical beams	6° - 10° - 15° - 20° - 25° - 30° - 35° - 40° - 55° - 60° - Elliptical UGR < 15	
Accessories	Filters, honeycomb grid upon request	
Luminous flux	300 to 800 lumen according to version	
Power supply	48V-S Track	230V Track
	Spot adaptor for 48V track 48V power supply on the spotlight	230V power supply on the spotlight Track adapter suitable for Global Trac PRO XTS or similar (ERCO, Trajectoire...)
	48V DALI Track	230V DALI Track
	Spot adaptor for 48V track 48V DALI power supply on the spotlight Dimming by pwm	230V DALI power supply on the spotlight Track adapter suitable for Global Trac Pulse, STUCCHI, SLV...
For USA & Canada use UL class 2 power supply		

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

2/6

LOUSS

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Firalux & LOUSS brands
Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




AUORE D40 • 48V-S Track • 230V Track • 48V DALI Track • 230V DALI Track

Power	4W to 10W according to version
Electric class	48V tracks : class 3 230V tracks : class 2
Use limitations	The product must be installed in a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span : L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lightning injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in.





AURORE D40 48V-S TRACK

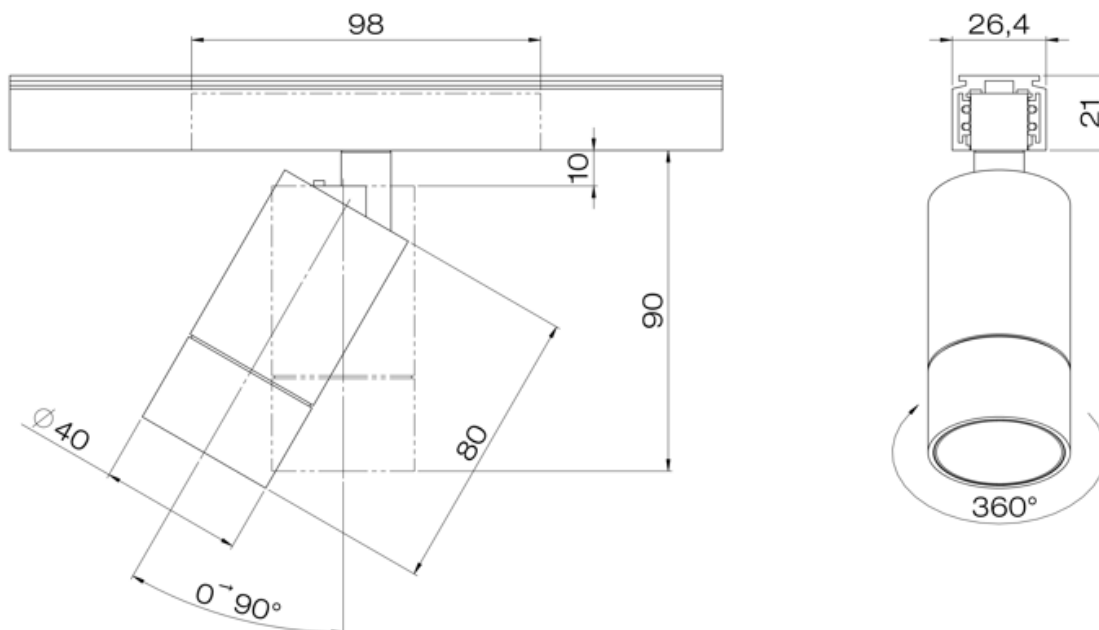

AURORE D40 230V TRACK

Track Global Trac PRO
Warning: Dimensions may vary by a few mms from one manufacturer to another

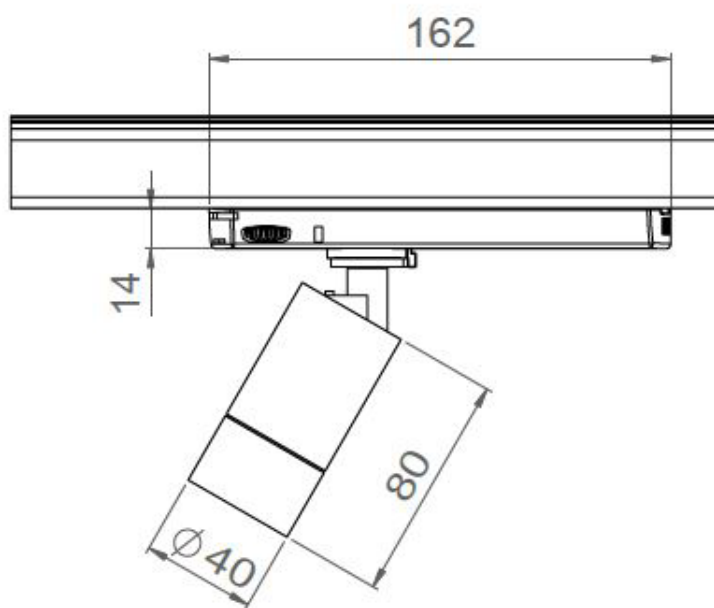

Louss

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update : 2025/06/19

4/6

Firalux & LOuss brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D40 48V DALI TRACK

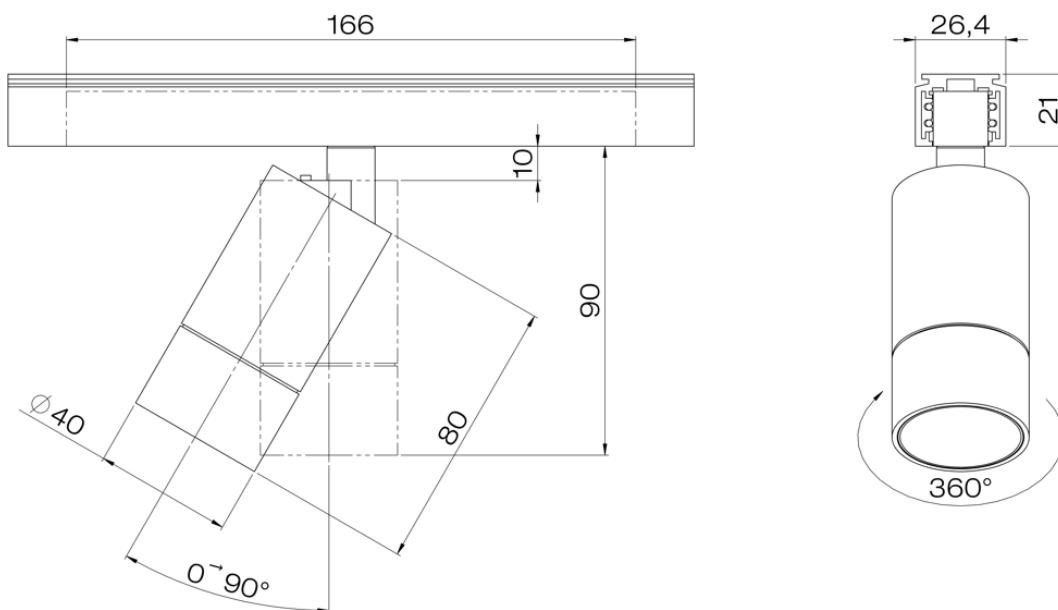

AURORE D40 230V DALI TRACK

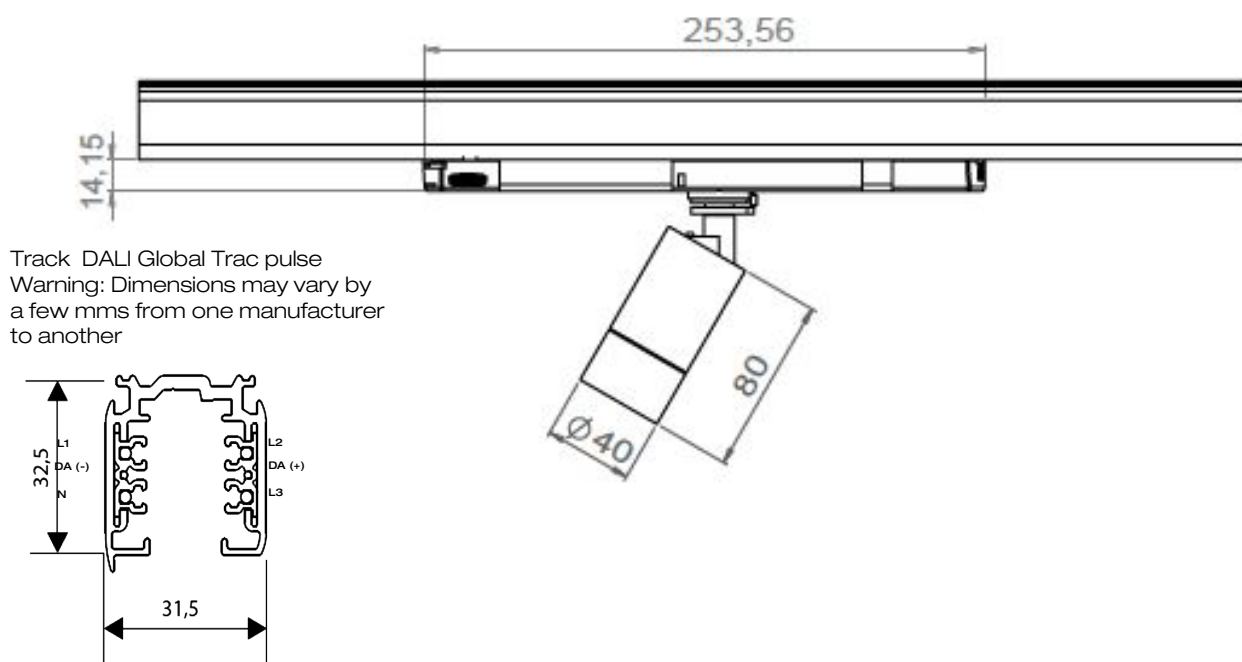

Louss

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged
Last update : 2025/06/19

5/6

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AUORE D40 • 48V-S Track • 230V Track • 48V DALI Track • 230V DALI Track

Easy swap system



All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Louss

Last update : 2025/06/19

Firalux & LOuss brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



48V-S Track

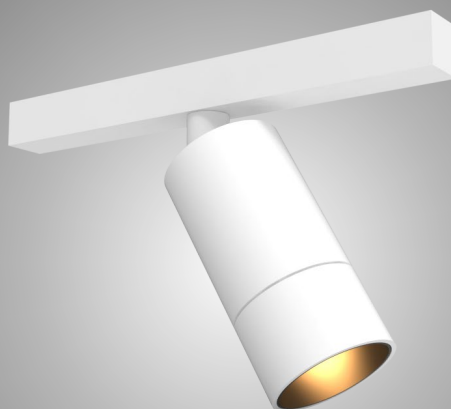


48V DALI Track



230V Track



230V DALI Track

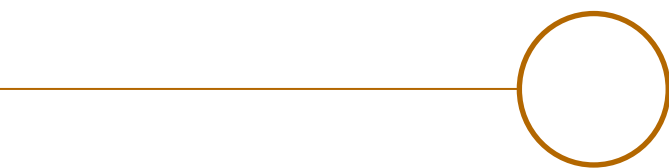

AURORE D42 TRACK



AUORE D42 • Track 48V-S • DALI Track 48V • Track 230V • DALI Track 230V

Range	Highly flexible spotlight on track for general & accent lighting	
Description	Low luminance Rotation 360° - Adjustable tilt 90° Easily changeable LED, optics and accessories on site, without any tool, with integrated LOuss Permuto easy swap system (see page 5)	
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)	
Dimensions	48V Stucchi Track	48V DALI Track
	Spotlight diameter : 42mm Height : 90mm Driver length : 98mm Track dimensions : 26.2 x 21mm	Spotlight diameter : 42mm Height : 90mm Driver length : 166mm Track dimensions : 26.2 x 21mm
	230V Track	230V DALI Track
	Spotlight diameter : 42mm Height : 93mm Driver length : 162mm (700mA) 228mm (1050mA) Track dimensions : 31.5 x 35.5mm	Spotlight diameter : 42mm Height : 93mm Driver length : 253mm Track dimensions : 31.5 x 35.5mm
Net weight	± 0.3 kg according to version	
LED characteristics	48V	230V
	MacAdam ellipse : 3 SDCM (standard) 2 SDCM (premium)	MacAdam ellipse : 3 SDCM
	2700K - 3000K – 3500K – 4000K – 5000K (other upon request) CRI90 (standard version) – CRI95, R9 > 80	
Optical beams	6° - 10° - 15° - 20° - 25° - 30° - 35° - 40° - 55° - 60° - Elliptical UGR < 15	
Accessories	Filters, honeycomb grid upon request	
Luminous flux	300 to 800 lumen according to version	
Power supply	48V Stucchi Track	48V DALI Track
	Spot adaptator for 48V track Power supply 48V on the spotlight	Spot adaptator for 48V track 48V DALI power supply on the spotlight Dimming by pwm
	230V Track	230V DALI Track
	230V power supply on the spotlight Track adapter suitable for Global Trac PRO XTS or similar (ERCO, Trajectoire...)	230V DALI power supply on the spotlight Track adapted suitable for Global Trac Pulse, STUCCHI, SLV...
For USA & Canada use UL class 2 power supply		

LOuss

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

2/5

Last update : 2025/06/19

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





AUORE D42 • Track 48V-S • DALI Track 48V • Track 230V • DALI Track 230V

Power	4W to 10W according to version
Electric class	48V tracks : class 3 230V tracks : class 2
Use limitations	The product must be installed in a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span : L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lightning injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in.




AURORE D42 48V-S TRACK / 48V DALI TRACK


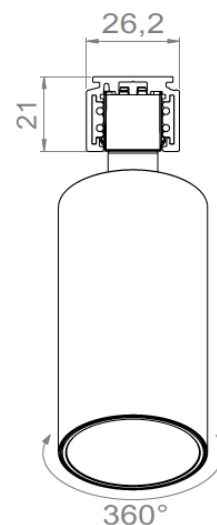
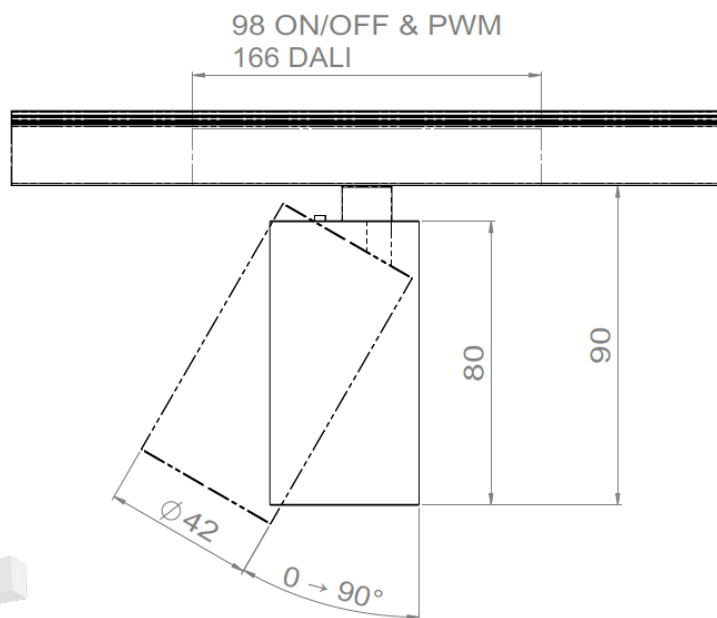


AURORE D42 230V TRACK / 230V DALI TRACK

Track Global Trac PRO
Warning: Dimensions may vary by a few mms from one manufacturer to another



Track DALI Global Trac pulse
Warning: Dimensions may vary by a few mms from one manufacturer to another

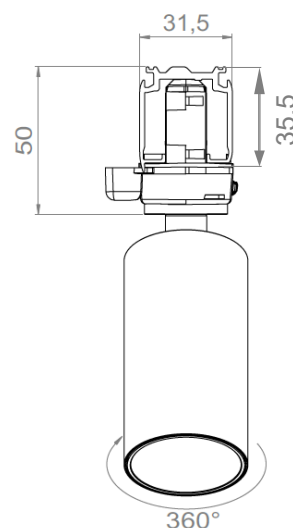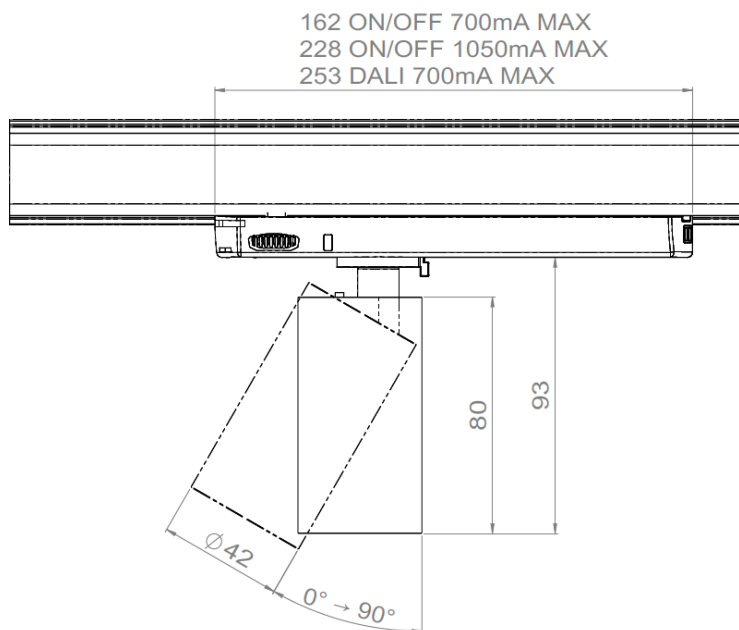

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update : 2025/06/19

Louss

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

Firalux & LOuss brands



AUORE D42 • Track 48V-S • DALI Track 48V • Track 230V • DALI Track 230V



LOuss **Permuto** – Easy swap system



All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOuss

Last update : 2025/06/19

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



48V-S Track



230V Track



48V DALI Track



230V DALI Track

AURORE D52 TRACK



AUORE D52 • 48V-S Track • 230V Track • 48V DALI Track • 230V DALI Track

Range	Highly flexible spotlight on track for general & accent lighting	
Description	Low luminance Rotation 360° - Adjustable tilt 90°	
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)	
Dimensions	48V Stucchi Track	230V Track
	Spotlight diameter : 52mm Spotlight length : 95mm (13W) 140mm (20W) Driver length : 98mm Track dimensions : 26.4 x 21mm	Spotlight diameter : 52mm Spotlight length : 95mm (13W) 145mm (20W) Driver length : 162mm Track dimensions : 31.5 x 35.5mm
	48V DALI Track	230V DALI Track
	Spotlight diameter : 52mm Spotlight length : 95mm (13W) 140mm (20W) Driver length : 166mm Track dimensions : 26.4 x 21mm	Spotlight diameter : 52mm Spotlight length : 95mm (13W) 140mm (20W) Driver length : 253.5mm Track dimensions : 31.5 x 35.5mm
Net weight	0.5 kg	
LED characteristics	2700K - 3000K – 3500K – 4000K – 5000K (other upon request) MacAdam ellipse : 3 SDCM (standard) 2 SDCM (premium) CRI90 (standard version) – CRI95, R9 > 90 (premium version)	
Optical beams	7° - 12° - 15° - 20° - 25° - 30° - 35° - Elliptical UGR < 15	
Accessories	Filters, honeycomb grid, chamfered spotlight body upon request	
Luminous flux	48V	230V
	600 to 1,200 lumen according to version	600 to 2,000 lumen according to version
Power supply	48V Stucchi Track	230V Track
	Spot adaptator for 48V track 48V power supply on the spotlight	230V power supply on the spotlight Track adapter suitable for Global Trac PRO XTS or simalar (ERCO, Trajectoire...)
	48V DALI Track	230V DALI Track
	Spot adaptator for 48V track 48V DALI power supply on the spotlight Dimming by pwm	230V DALI power supply on the spotlight Track adapter suitable for Global Trac Pulse, STUCCHI, SLV...
For USA & Canada use UL class 2 power supply		

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

2/5

Louss

Last update : 2025/07/10

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




AUORE D52 • 48V-S Track • 230V Track • 48V DALI Track • 230V DALI Track

Power	6W to 25W according to version
Electric class	48V tracks : class 3 230V tracks : class 2
Use limitations	The product must be installed in a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span : L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lightning injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in.





AURORE D52 48V-S TRACK

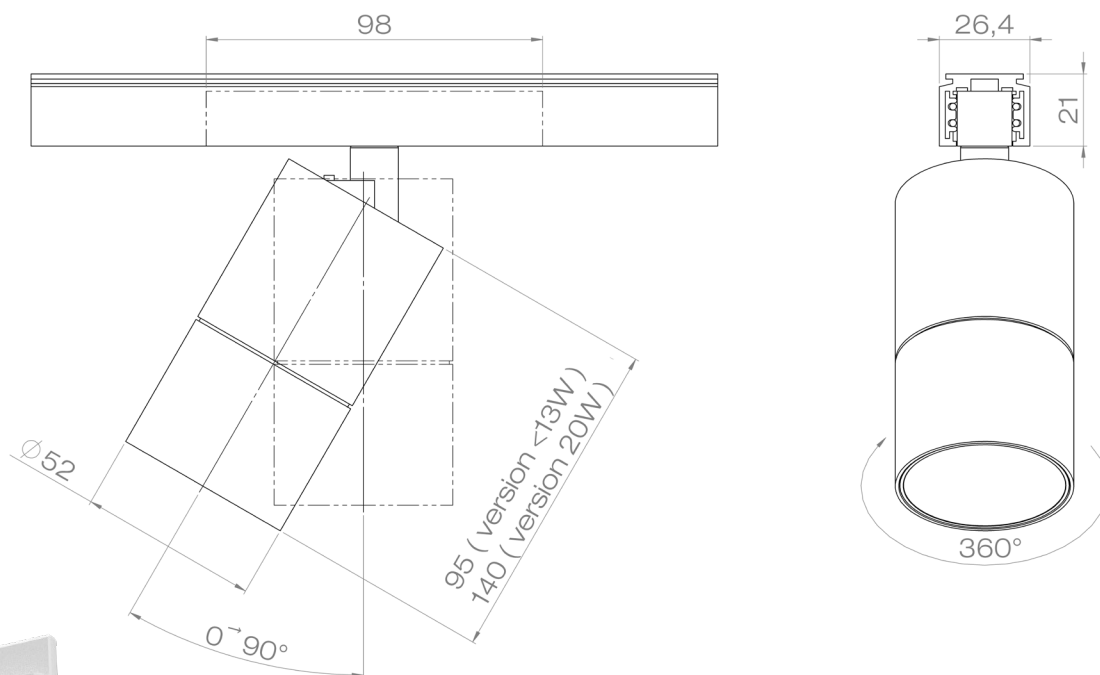

AURORE D52 230V TRACK

Track Global Trac PRO
Warning: Dimensions may vary by a few mms from one manufacturer to another

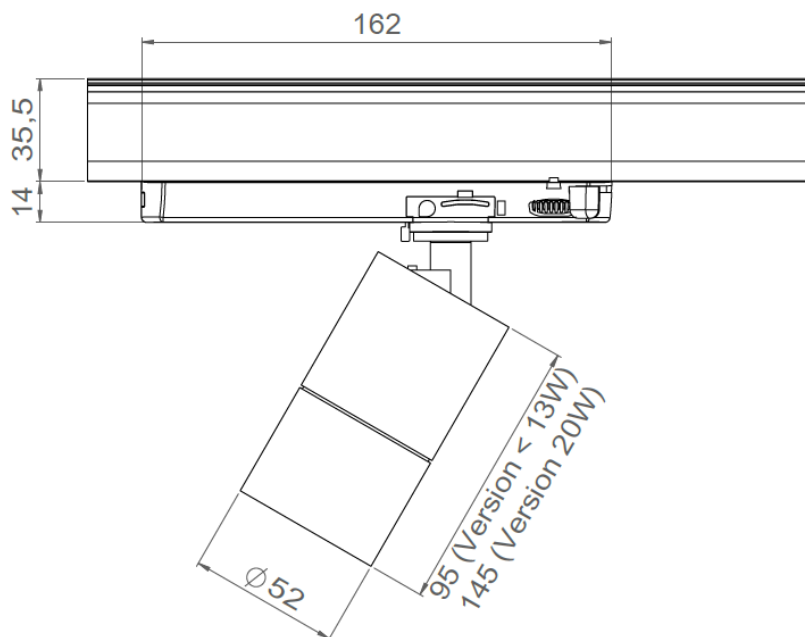

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update : 2025/07/10

4/5

Firalux & LOuss brands

LOuss


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D52 48V DALI TRACK

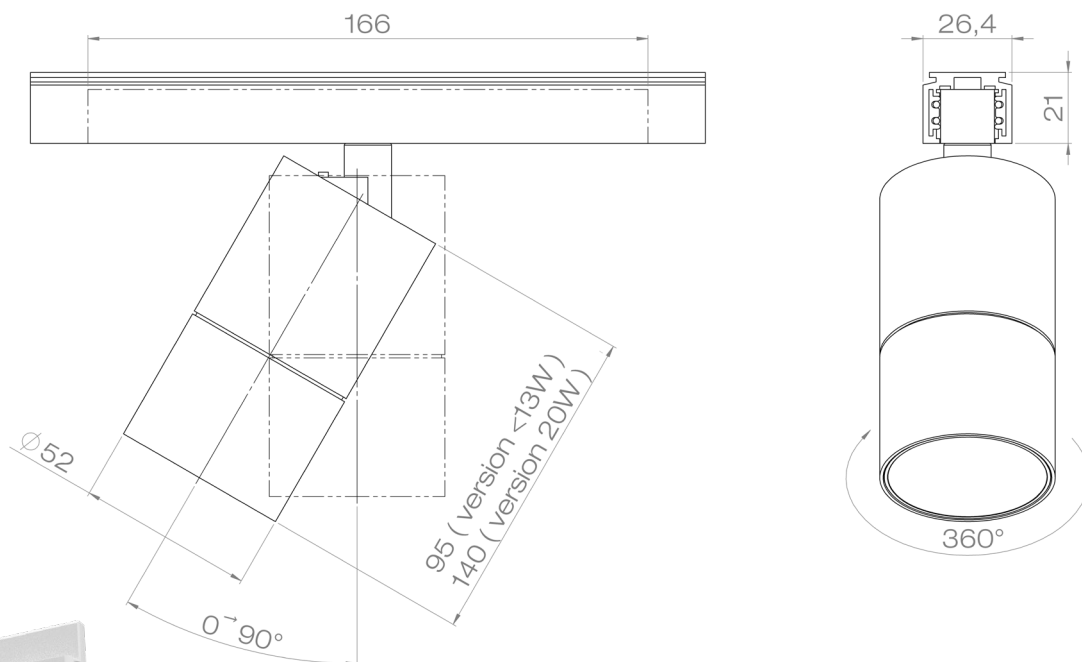

AURORE D52 230V DALI TRACK

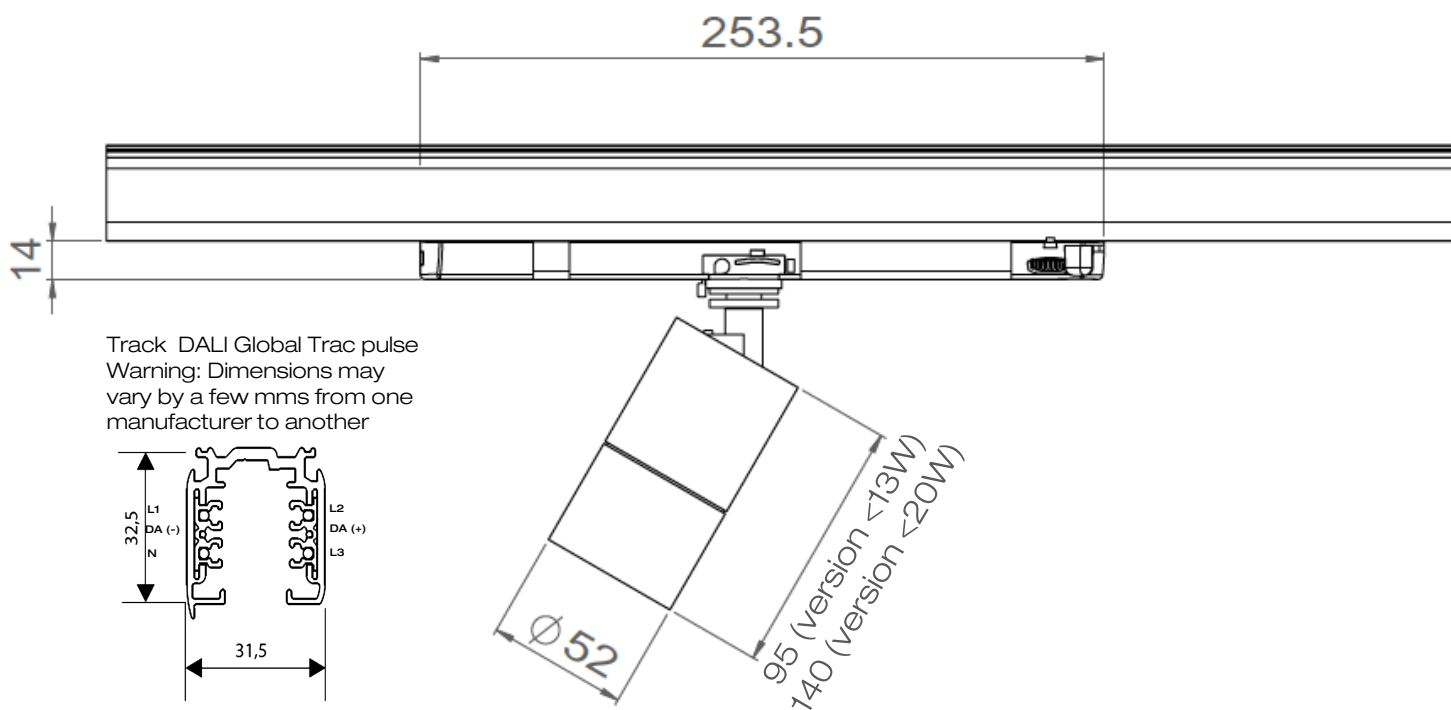

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

5/5

l'ouss

Last update : 2025/07/10

Firalux & LOuss brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



48V-S Track

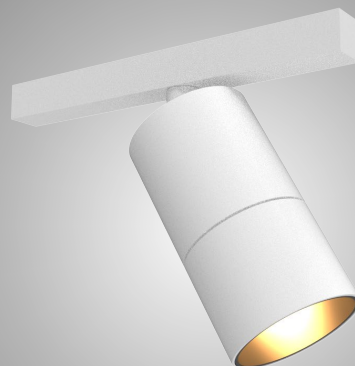


48V DALI Track



230V Track



230V DALI Track

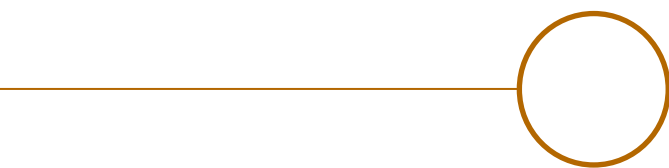

AURORE D55 TRACK



AUORE D55 • 48V-S Track • 48V DALI Track • 230V Track • 230V DALI Track

Range	Highly flexible spotlight on track for general & accent lighting	
Description	Low luminance Rotation 360° - Adjustable tilt 90° Easily changeable LED, optics and accessories on site, without any tool, with integrated LOuss Permuto easy swap system (see page 5)	
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)	
Dimensions	48V-Stucchi Track	48V DALI Track
	Spotlight diameter : 55mm Spotlight length : 95mm Driver length : 98mm Track dimensions : 26.2 x 21mm	Spotlight diameter : 52mm Spotlight length : 95mm Driver length : 166mm Track dimensions : 26.2 x 21mm
	230V Track	230V DALI Track
	Spotlight diameter : 55mm Spotlight length : 95mm Driver length : 162mm (750mA) 228mm (1050mA) Track dimensions : 31.5 x 35.5mm	Spotlight diameter : 55mm Spotlight length : 95mm Driver length : 253mm Track dimensions : 31.5 x 35.5mm
Net weight	0.5 kg	
LED characteristics	2700K - 3000K - 3500K - 4000K - 5000K (other upon request) MacAdam ellipse : 3 SDCM (standard) 2 SDCM (premium) CRI : 90 - 95 - 98	
Optical beams	13° - 18° - 24° - 32° (CRI < 98) 7° (CRI 90) UGR < 15	
Accessories	Filters, honeycomb grid upon request	
Luminous flux	48V	230V
	600 to 1,200 lumen according to version	600 to 2,000 lumen according to version
Power supply	48V-Stucchi Track	48V DALI Track
	Spot adaptator for 48V track 48V power supply on the spotlight	Spot adaptator for 48V track 48V DALI power supply on the spotlight Dimming by pwm
	230V Track	230V DALI Track
	230V power supply on the spotlight Track adapter suitable for Global Trac PRO XTS or similar (ERCO, Trajectoire...)	230V DALI power supply on the spotlight Track adapter suitable for Global Trac Pulse, STUCCHI, SLV...
For USA & Canada use UL class 2 power supply		




AURORE D55 • 48V-S Track • 48V DALI Track • 230V Track • 230V DALI Track

Power	6W to 25W according to version
Electric class	48V tracks : class 3 230V tracks : class 2
Use limitations	The product must be installed in a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span : L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lightning injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in.




AUORE D55 48V-S TRACK / 48V DALI TRACK


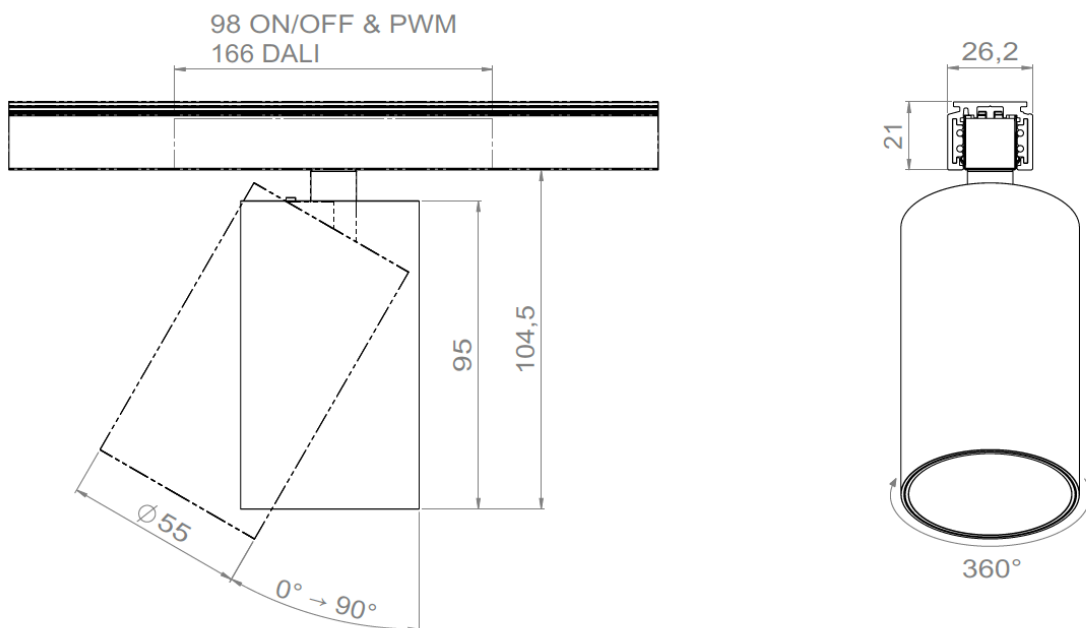


AUORE D55 230V TRACK / 230V DALI TRACK

Track Global Trac PRO
Warning: Dimensions may vary by a few mms from one manufacturer to another



Track DALI Global Trac pulse
Warning: Dimensions may vary by a few mms from one manufacturer to another

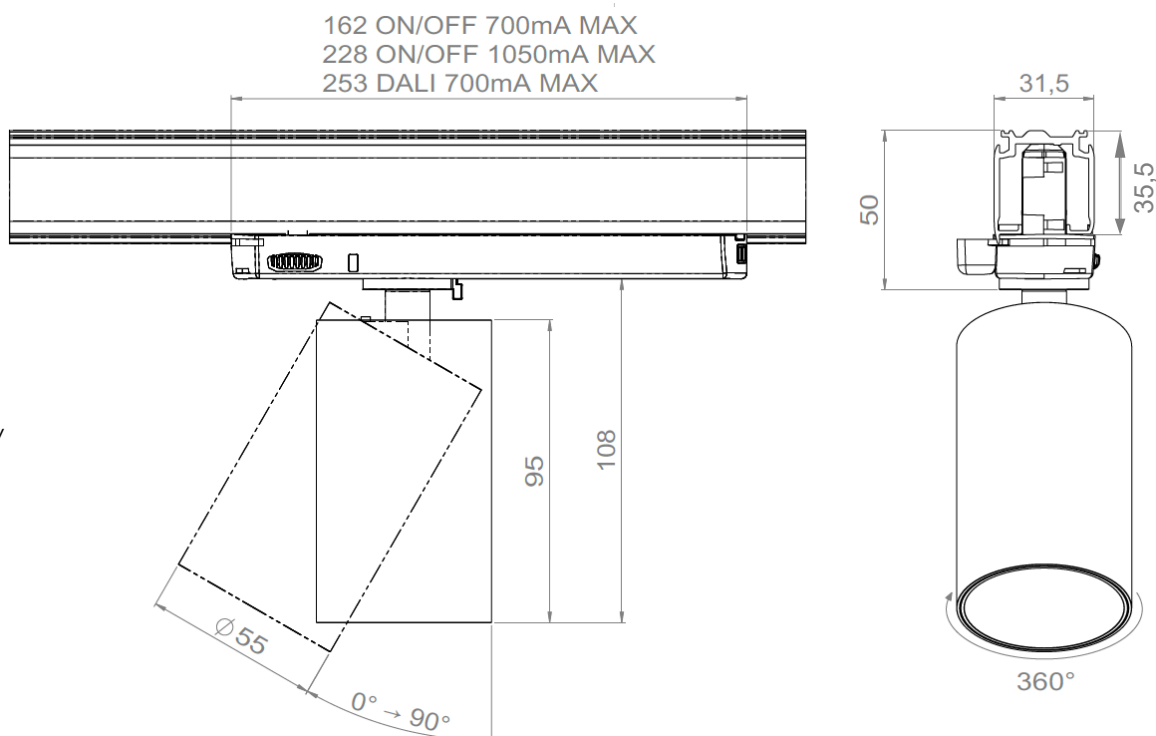

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

l'ouss

Last update : 2025/06/17

4/5

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AUORE D55 • 48V-S Track • 48V DALI Track • 230V Track • 230V DALI Track



LOuss **Permuto** – Easy swap system



All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOuss

Last update : 2025/06/17

5/5

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D60 TRACK



AURORE D60

• 230V TRACK • 230V DALI TRACK

Range	Highly flexible spotlight on track for general & accent lighting	
Description	Low luminance Rotation 360° - Adjustable tilt 90°	
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)	
Dimensions	230V Track	230V DALI Track
	Spotlight diameter : 61mm Spotlight length : 145mm Driver length : 162mm Track dimensions : 31.5 x 32.5mm	Spotlight diameter : 61mm Spotlight length : 145mm Driver length : 228mm Track dimensions : 31.5 x 32.5mm
Net weight	0.5 kg	
LED characteristics	2700K - 3000K – 3500K – 4000K – 5000K (other upon request) MacAdam ellipse : 3 SDCM (standard) 2 SDCM (premium) CRI 90 (standard version) – CRI 95, R9 > 90 (premium version)	
Optical beams	7° - 12° - 15° - 20° - 25° - 30° - 35° - Elliptical UGR < 15	
Accessories	Filters, honeycomb grid upon request	
Luminous flux	600 to 2,000 lumen according to version	
Power supply	Track 230V	DALI Track 230V
	230V power supply on the spotlight Track adapter suitable for Global Trac PRO XTS or similar (ERCO, Trajectoire...)	230V DALI power supply on the spotlight Track adapter suitable for Global Trac Pulse, STUCCHI, SLV...
	For USA & Canada use UL class 2 power supply	
Power	6W to 25W according to version	
Use limitations	The product must be installed in a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use	
Warranty	Life span : L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lightning injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in.	

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

2/3

LOuss

Last update : 2025/06/19

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z



Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





AUORE D60 230V TRACK

Global Trac PRO 3-circuits track
Warning: Dimensions may vary
by a few mms from one
manufacturer to another

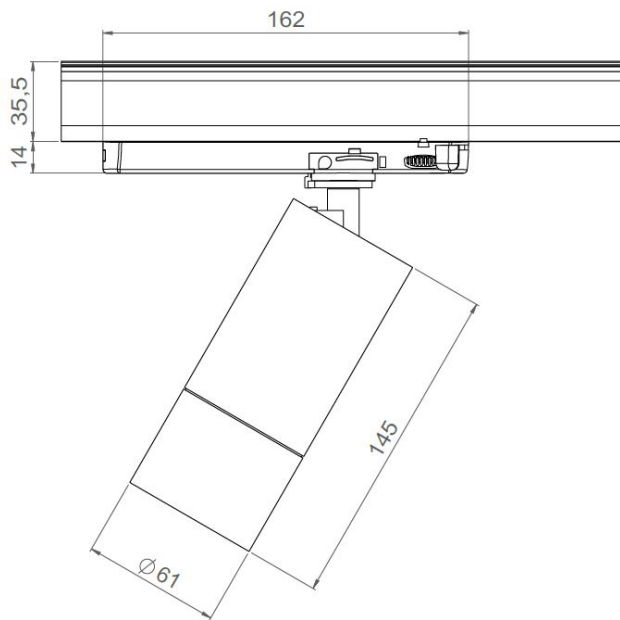

AUORE D60 230V DALI TRACK

Track DALI Global Trac pulse
Warning: Dimensions may vary
by a few mms from one
manufacturer to another

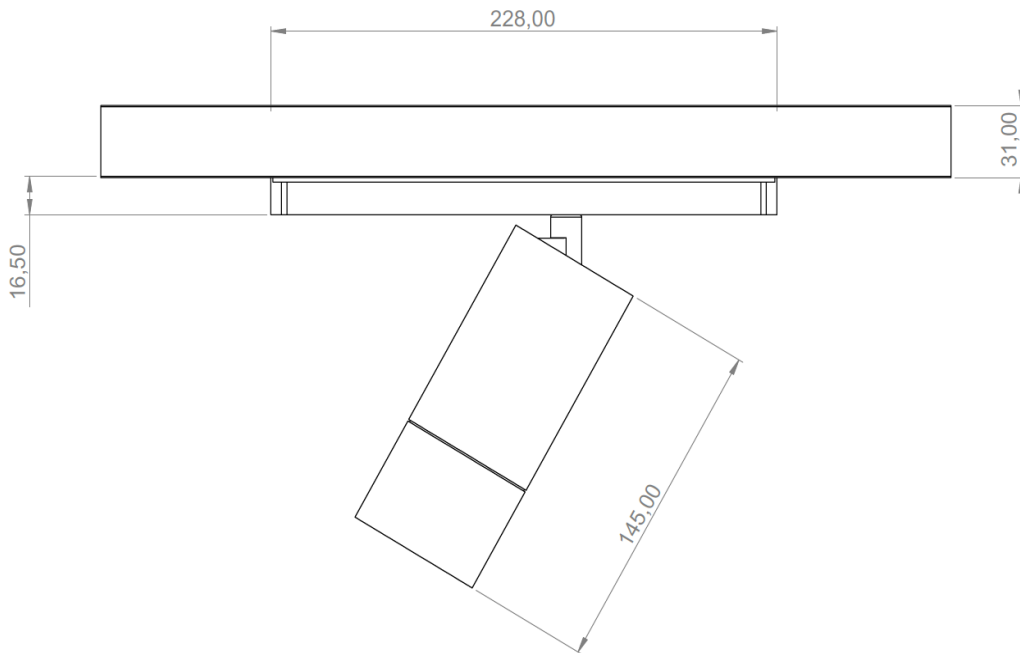

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

lOuss

Last update : 2025/06/19

3/3

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D82 TRACK



AUORE D82 • 230V TRACK • 230V DALI TRACK

Range	Highly flexible spotlight on track for general & accent lighting	
Description	Low luminance 1 LED or 3 LEDs versions Rotation 360° - Adjustable tilt 90°	
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)	
Dimensions	Track 230V	DALI Track 230V
	Spotlight diameter : 81mm Spotlight length : 146mm Driver length : 162mm Track dimensions : 31.5 x 35.5mm	Spotlight diameter : 81mm Spotlight length : 146mm Driver length : 253.6mm Track dimensions : 31.5 x 35.5mm
Net weight	0.8 kg	
LED characteristics	2700K - 3000K – 3500K – 4000K – 5000K (other upon request) Trio version : 2700K + 4000K + 6500K (no tunable white) MacAdam ellipse : 3 SDCM (standard) 2 SDCM (premium) CRI 90 (standard version) – CRI 95, R9 > 90 (premium version)	
Optical beams	7° - 12° - 15° - 20° - 25° - 30° - 35° - Elliptical UGR < 15	
Accessories	Filters, honeycomb grid upon request	
Luminous flux	700 to 2,500 lumen according to version	
Power supply	Track 230V	DALI Track 230V
	230V power supply on the spotlight Track adapter suitable for Global Trac PRO XTS or simalar (ERCO, Trajectoire...)	230V DALI power supply on the spotlight Track adapter suitable for Global Trac Pulse, STUCCHI, SLV...
	For USA & Canada use UL class 2 power supply	
Power	15W to 30W according to version	
Use limitations	The product must be installed in a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use	
Warranty	Life span : L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lightning injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in.	

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update : 2025/06/19

2/3

Firalux & LOuss brands

LOuss

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z



Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





AUORE D82 230V TRACK

Global Trac PRO 3-circuits track
Warning: Dimensions may vary
by a few mms from one
manufacturer to another

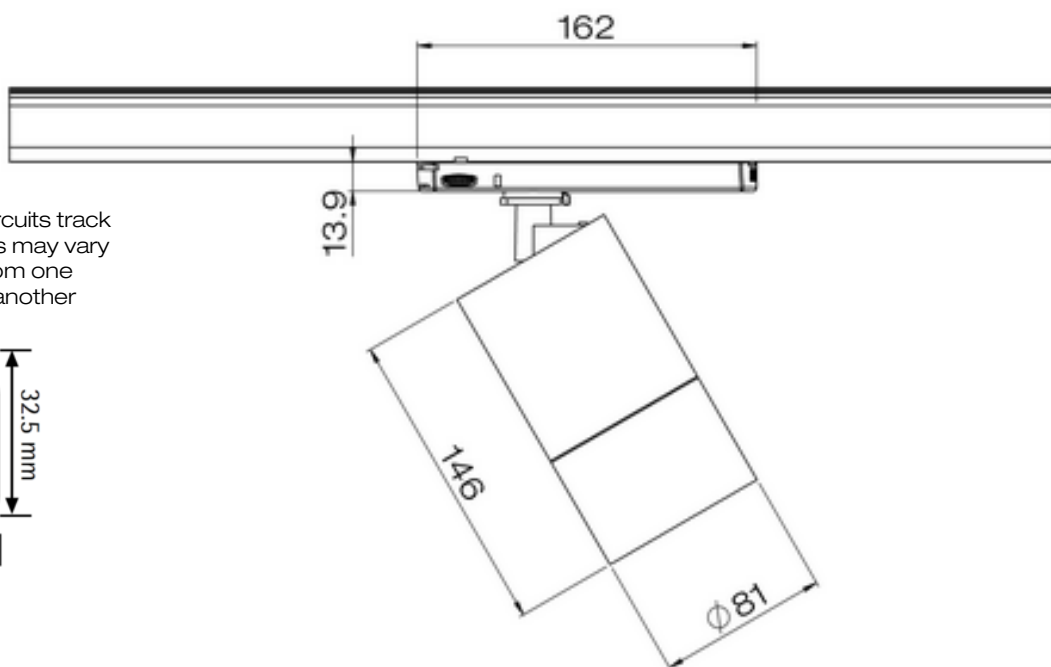

AUORE D82 230V DALI TRACK

Track DALI Global Trac pulse
Warning: Dimensions may vary
by a few mms from one
manufacturer to another

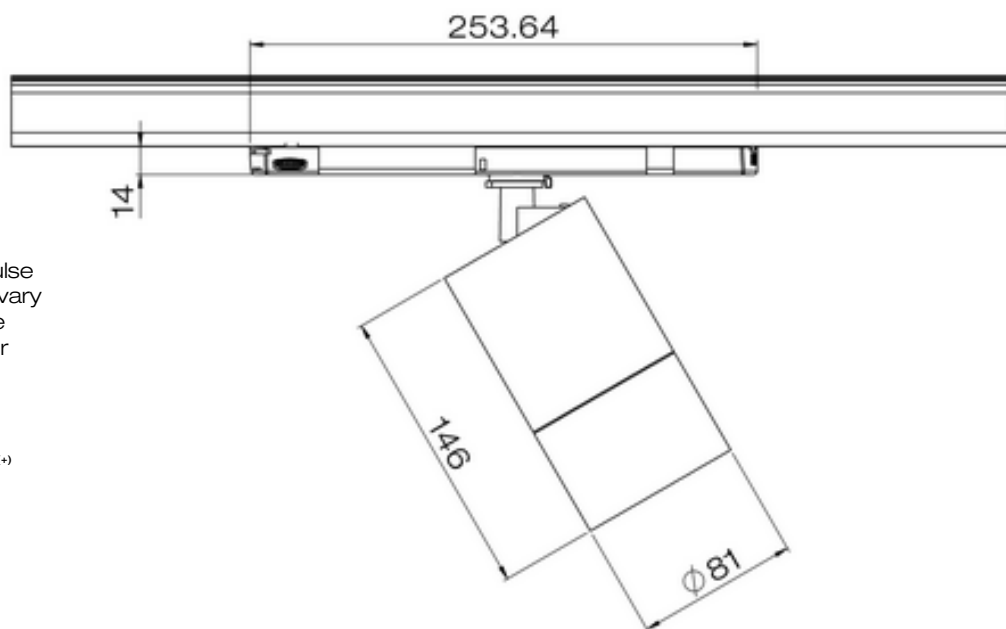

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Louss

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Last update : 2025/06/19

Firalux & LOuss brands

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE