

AURORE WALL-MOUNTED RANGE

CONTENTS	
AURORE D40	2
AURORE D42	11
AURORE D52	17
AURORE D55	22
AURORE D60	26
AURORE D82	31




ROUND WALL-MOUNTED



ROUND WALL-MOUNTED
MAGNETIC

AURORE D40 WALL-MOUNTED





AURORE D40 WALL-MOUNTED • Round • Round Magnetic

Range	Highly adjustable luminaires for general & accent lighting
Description	Luminaire equipped with low luminance spotlight Rotation 360° - Adjustable tilt 90° max Round Magnetic version : Magnetic mounting with safety sling ring Magnetic fixing disk to be fixed on a non-magnetic surface (optional) Optional : Easily changeable LED, optics and accessories on-site without any tool, with integrated Easy Swap system (see page 6)
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)
Dimensions	Spotlight diameter : 40mm Spotlight length : 80mm Wall-mounted box diameter : 52mm
Net weight	± 0.210kg according to version
LED characteristics	2700K - 3000K – 3500K – 4000K – 5000K (other upon request) MacAdam ellipse : 3 SDCM CRI90 (standard version) – CRI95, R9 > 80
Optical beams	6° - 10° - 15° - 20° - 25° - 30° - 35° - 40° - 55° - 60° - Elliptical UGR < 15
Accessories	Filtres, honeycomb grid upon request
Luminous flux	300 to 800 lumen according to version
Connection	Supplied with 0.5m cable Or connectors in the box
Power supply	Remote constant current driver 700mA max. according to version Dimmable driver upon request For US & Canada, use a UL class 2 driver
Power	4W to 10W according to version
Installation & Connection	Luminaires supplied with 0.5m cable. Quick connector upon request Optional : connectors in the box The drivers can be remote to a distance up to 5m max. For greater distances (10-15m max.), please contact us. Depending on the installation, anti-surge protection may be provided with the luminaires Take into consideration the cumulative length of all the cables when connecting several luminaires in series on the same driver

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update: 2025.16.10

2/6


Louss

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

Firalux & LOuss brands





AUORE D40 WALL-MOUNTED • Round • Round Magnetic


Use limitations	<p>The product must be installed into a ventilated area</p> <p>Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees</p> <p>The drivers, if not delivered by LOuss, must be approved before use</p>
Warranty	<p>Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature</p> <p>3-year parts and labour warranty</p> <p>The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product</p> <p>All products are electrically tested and received a functional burn-in</p>




AURORE D40 ROUND WALL-MOUNTED

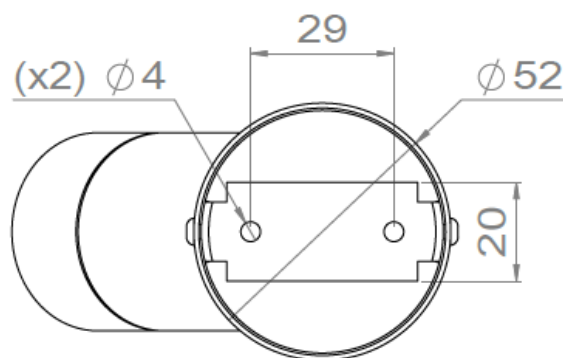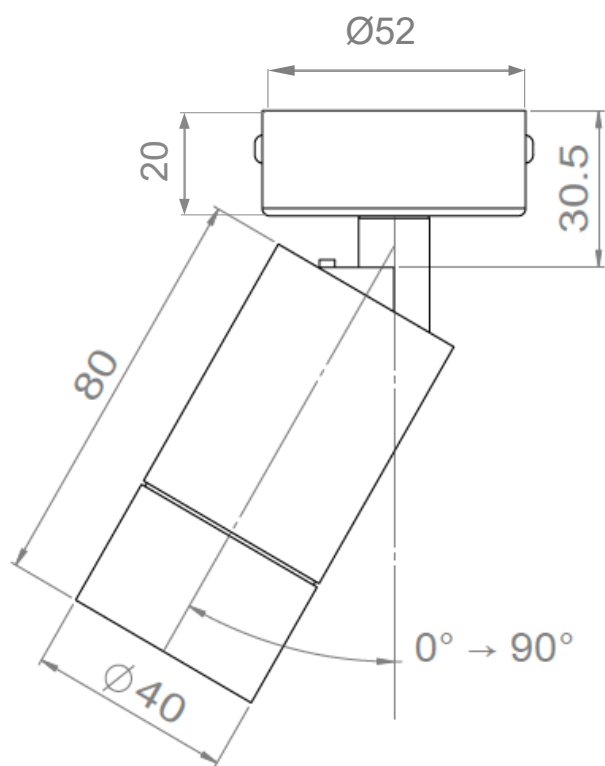

Cable output from behind

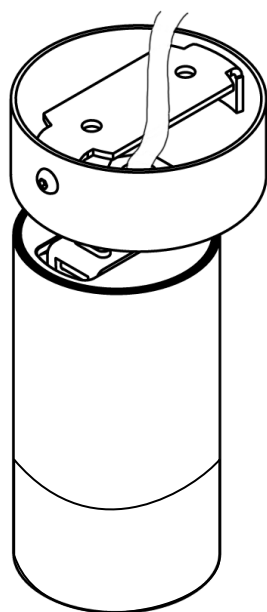

Cable output on the side

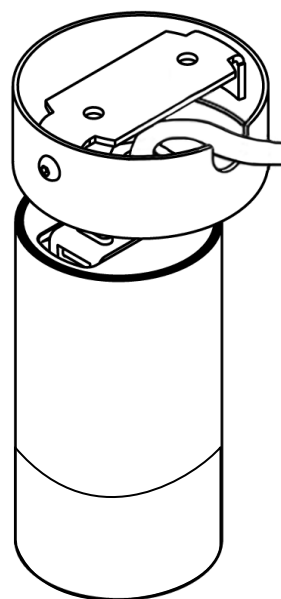

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

lOuss

Last update: 2025.16.10

Firalux & LOuss brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





AURORE D40 ROUND WALL-MOUNTED MAGNETIC

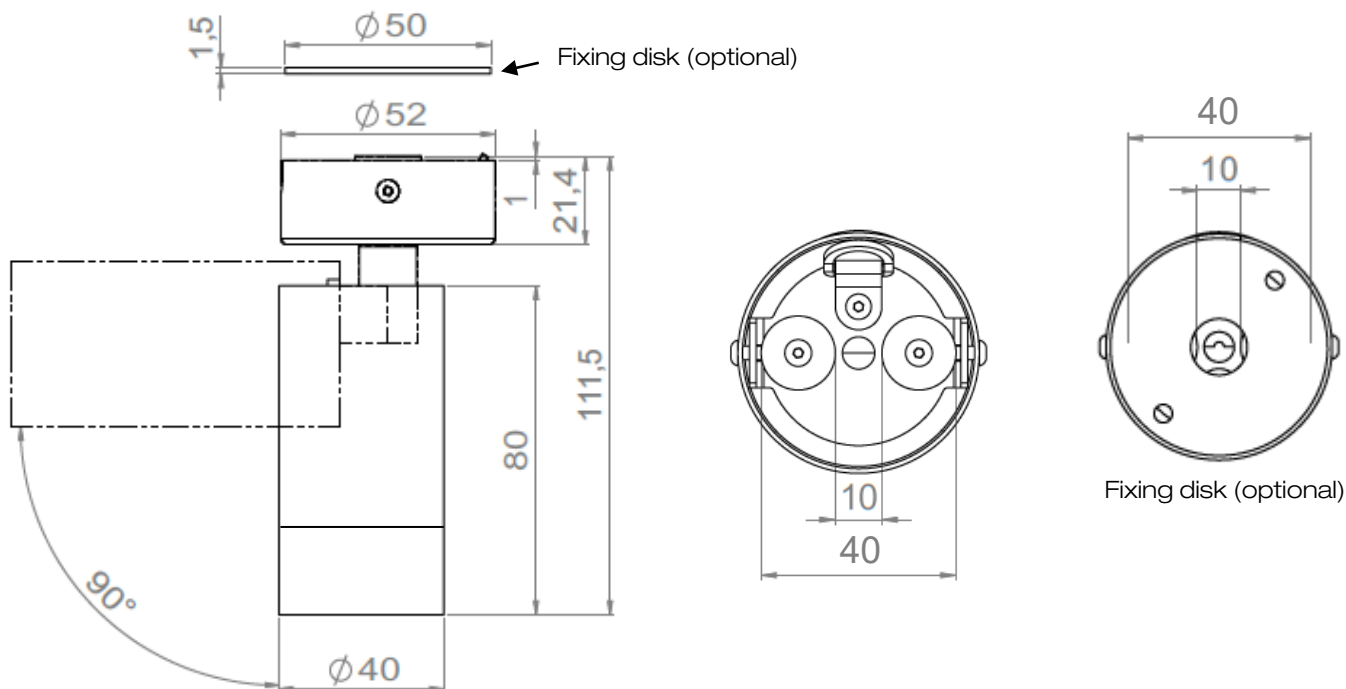

Cable output from behind

Cable output on the side

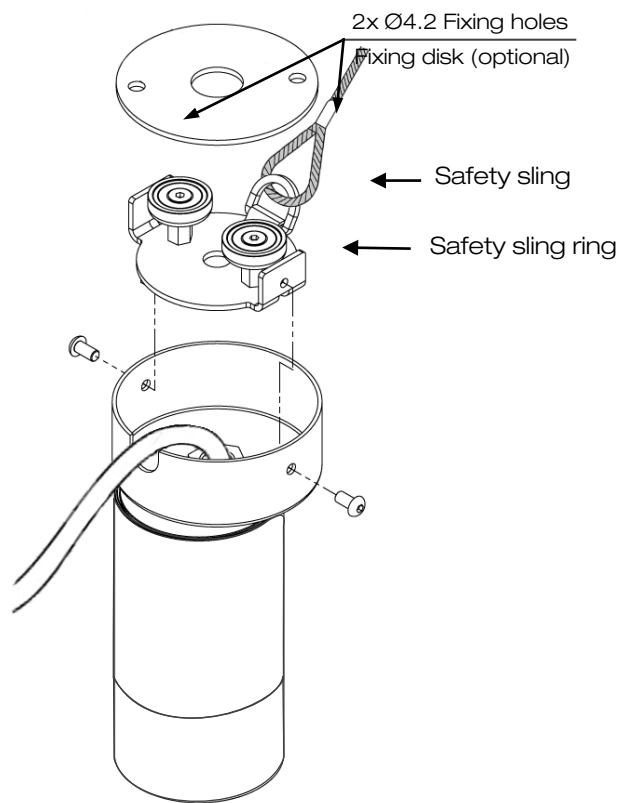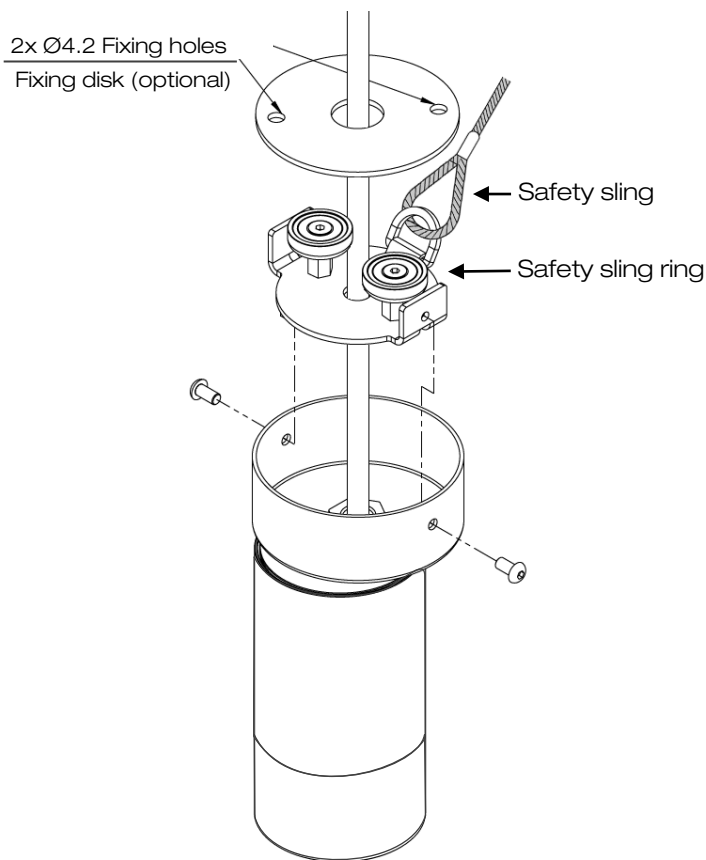

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

5/6

Wouss

Last update: 2025.16.10

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D40 WALL-MOUNTED • Round • Round Magnetic

Easy Swap system

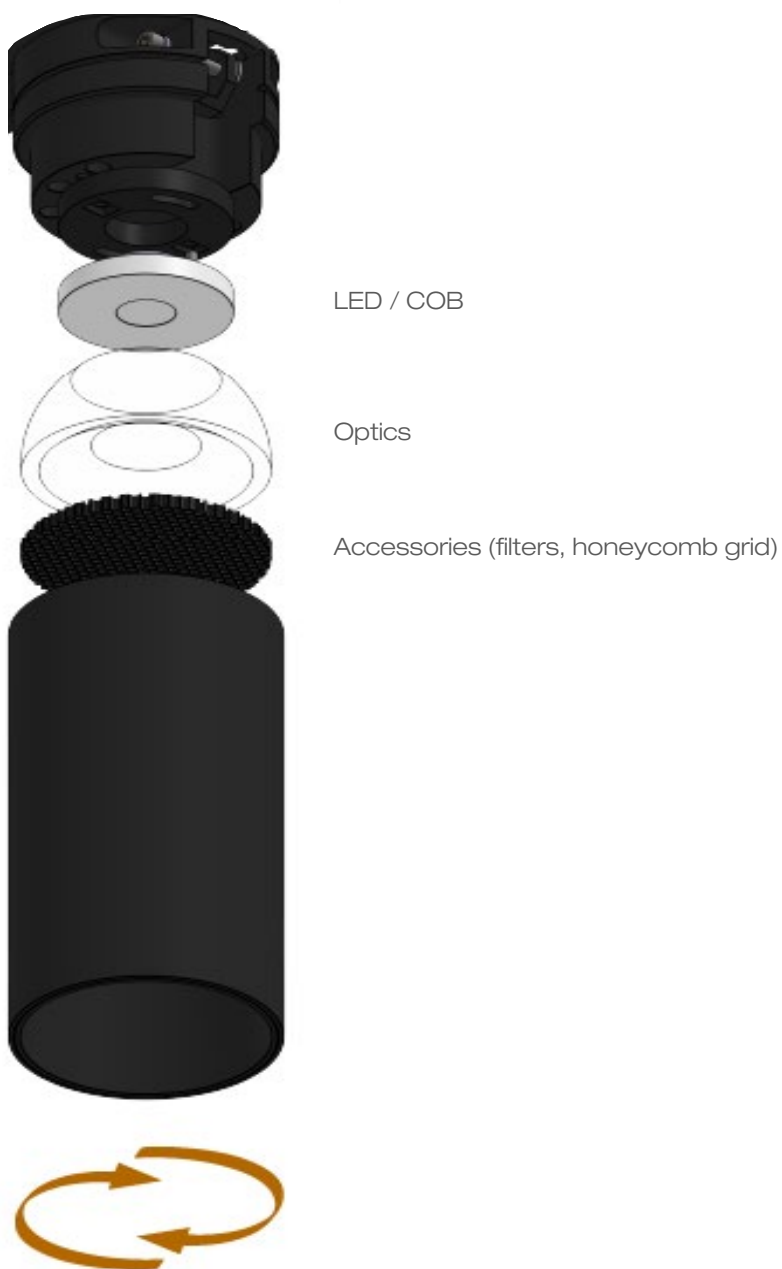

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOUSS


Last update: 2025.16.10

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z



Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D40 PIVOT

Threaded rod M10x1 + fixing nut

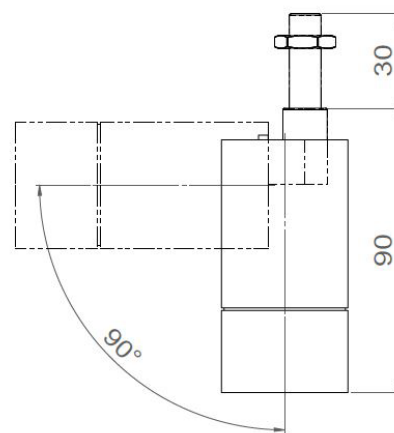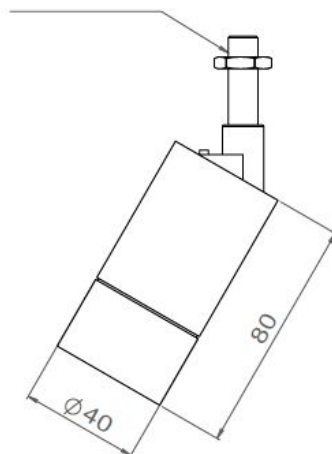

AURORE D40 PIVOT

Range	Highly adjustable luminaire for general & accent lighting
Description	Luminaire equipped with low luminance spotlight Rotation 360° - Adjustable tilt 90° max Optional : Easily changeable LED, optics and accessories on site, without any tool, with integrated Easy Swap system (see page 3)
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)
Dimensions	Spotlight diameter : 40mm Spotlight length : 80mm
Net Weight	0.150 kg
LED characteristics	2700K – 3000K – 3500K – 4000K – 5000K MacAdam ellipse: 3 SDCM CRI 90 (standard) – CRI 95, R9 > 80
Optical beams	6° - 10° - 15° - 20° - 25° - 30° - 35° - 40° - 55° - 60° - Elliptical UGR < 15
Accessories	Filters, honeycomb grid
Luminous flux	300 to 800 lumen according to version
Installation	Fixation with threaded rod M10x1 + fixing nut
Connection	Supplied with 0.5m cable
Power supply	Remote constant current driver 700mA max. according to version Dimmable driver upon request For US & Canada, use a driver UL class 2
Power	3W to 10W according to version
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update : 2025/06/19

LOuss

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE


2/3

Firalux & LOuss brands



AURORE D40 PIVOT

LOuss **Permuto** – Easy swap system

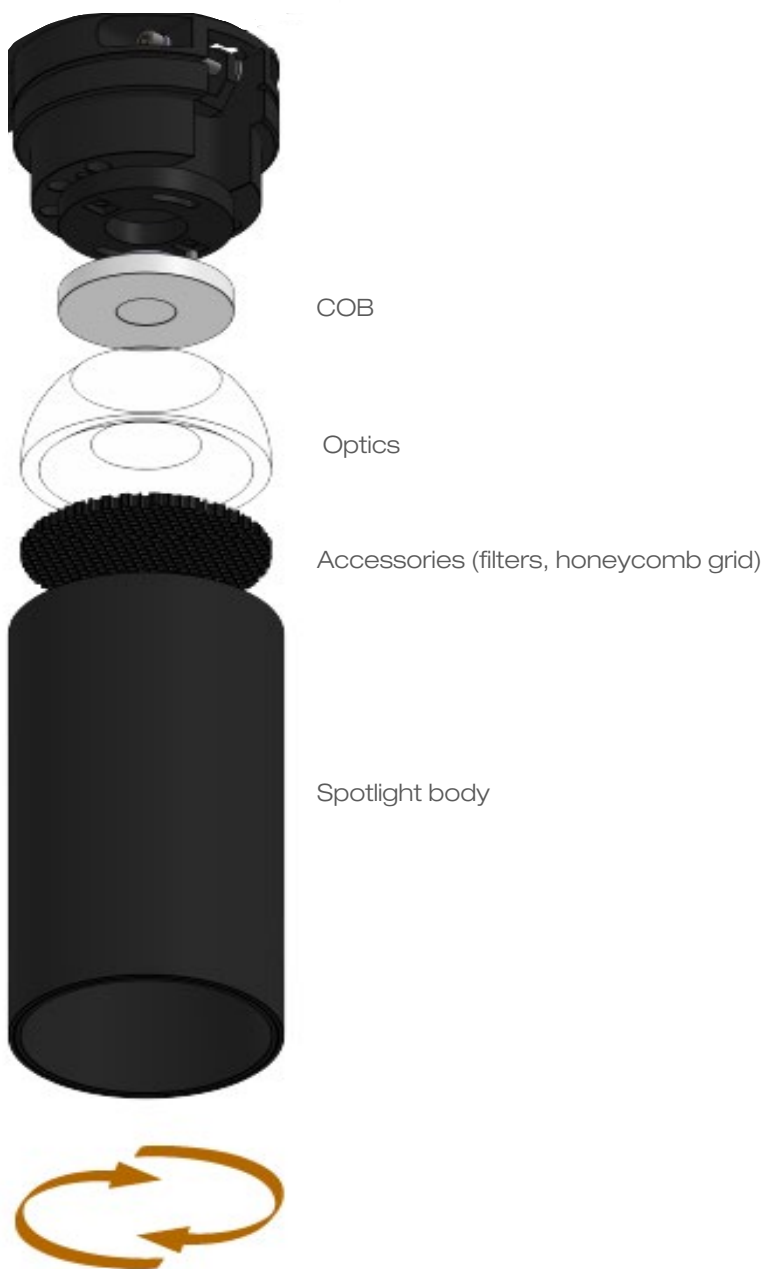

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged



Last update : 2025/06/19

LOuss


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

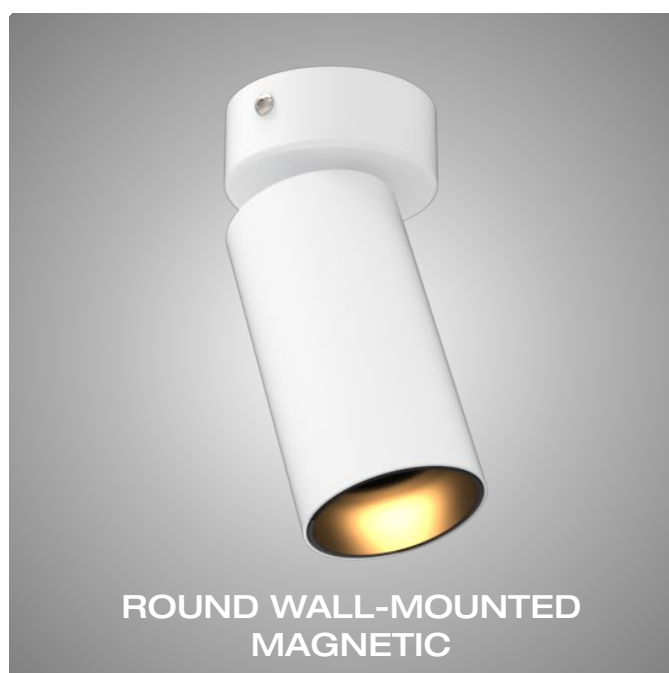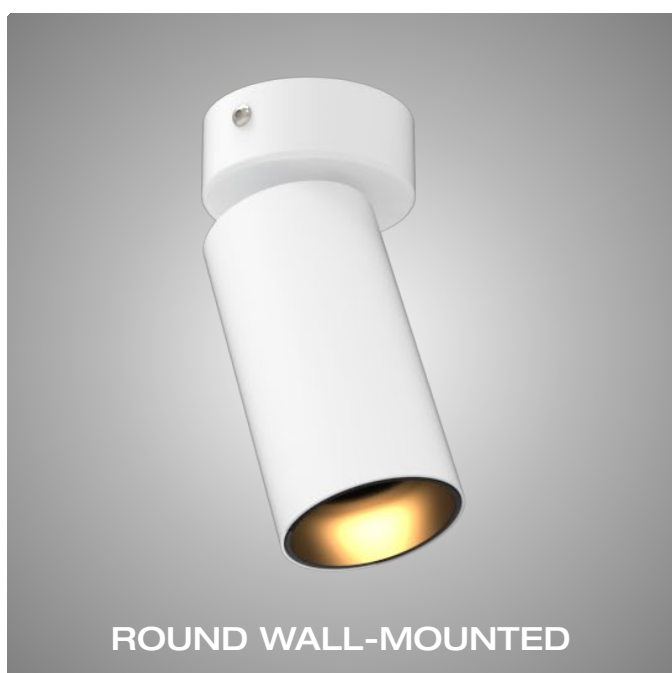

AURORE D42 WALL-MOUNTED





AURORE D42 WALL-MOUNTED • Round • Round Magnetic

Range	Highly adjustable luminaires for general & accent lighting
Description	Luminaire equipped with low luminance spotlight Rotation 360° - Adjustable tilt 90° max Round Magnetic version : Magnetic mounting with safety sling ring Magnetic fixing disk to be fixed on a non-magnetic surface (optional) Easily changeable LED, optics and accessories on-site without any tool, with integrated Permuto Easy Swap system (see page 6)
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)
Dimensions	Spotlight diameter : 42mm Spotlight length : 80mm Wall-mounted box diameter : 52mm
Net weight	± 0.230kg according to version
LED characteristics	2700K - 3000K - 3500K - 4000K - 5000K (other upon request) MacAdam ellipse : 3 SDCM CRI90 (standard version) - CRI95, R9 > 80
Optical beams	6° - 10° - 15° - 20° - 25° - 30° - 35° - 40° - 55° - 60° - Elliptical UGR < 15
Accessories	Filters, honeycomb grids upon request
Luminous flux	300 to 800 lumen according to version
Power supply	Remote constant current driver 700mA max. according to version Dimmable driver upon request For US & Canada, use a driver UL class 2
Power	4W to 10W according to version
Installation & Connection	Luminaires supplied with 0.5m cable. Quick connector upon request Optional : connectors in the box The drivers can be remote to a distance up to 5m max. For greater distances (10-15m max.), please contact us. Depending on the installation, anti-surge protection may be provided with the luminaires Take into consideration the cumulative length of all the cables when connecting several luminaires in series on the same driver

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update: 2025.10.15

2/6

Firalux & LOuss brands

LOuss

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




AURORE D42 WALL-MOUNTED • Round • Round Magnetic


Use limitations	<p>The product must be installed into a ventilated area</p> <p>Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees</p> <p>The drivers, if not delivered by LOuss, must be approved before use</p>
Warranty	<p>Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature</p> <p>3-year parts and labour warranty</p> <p>The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product</p> <p>All products are electrically tested and received a functional burn-in</p>




AURORE D42 ROUND WALL-MOUNTED

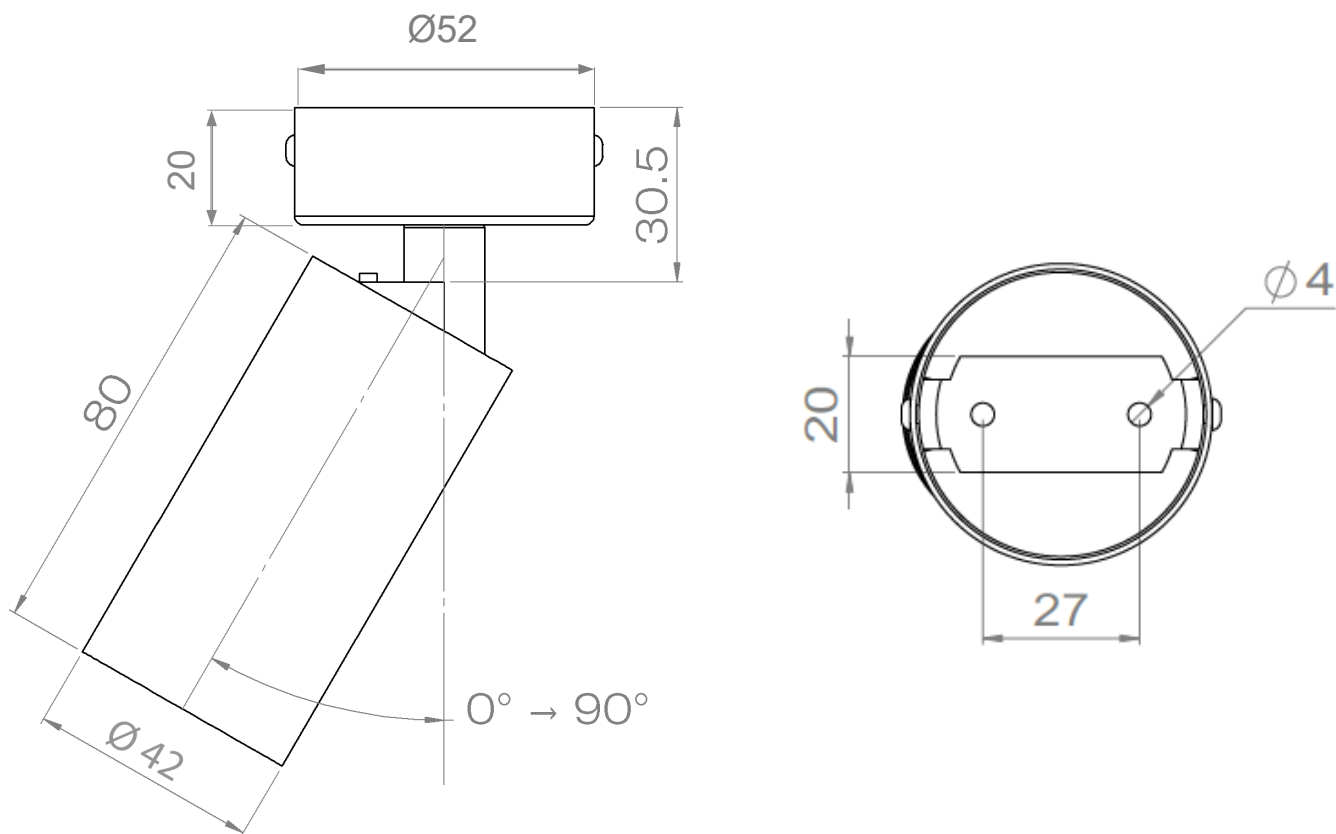

Cable output from behind

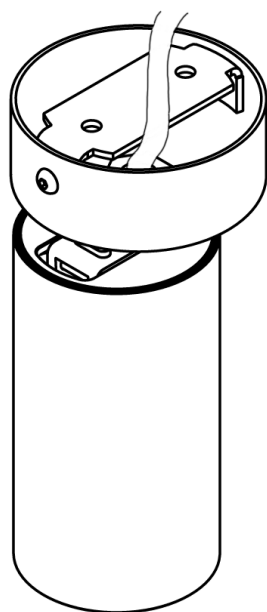

Cable output from the side

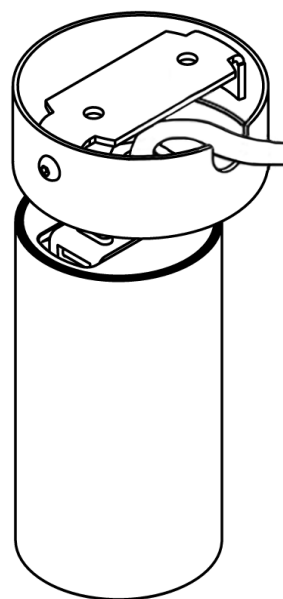

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

lOuss

Last update: 2025.10.15

Firalux & LOuss brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





AURORE D42 ROUND WALL-MOUNTED MAGNETIC

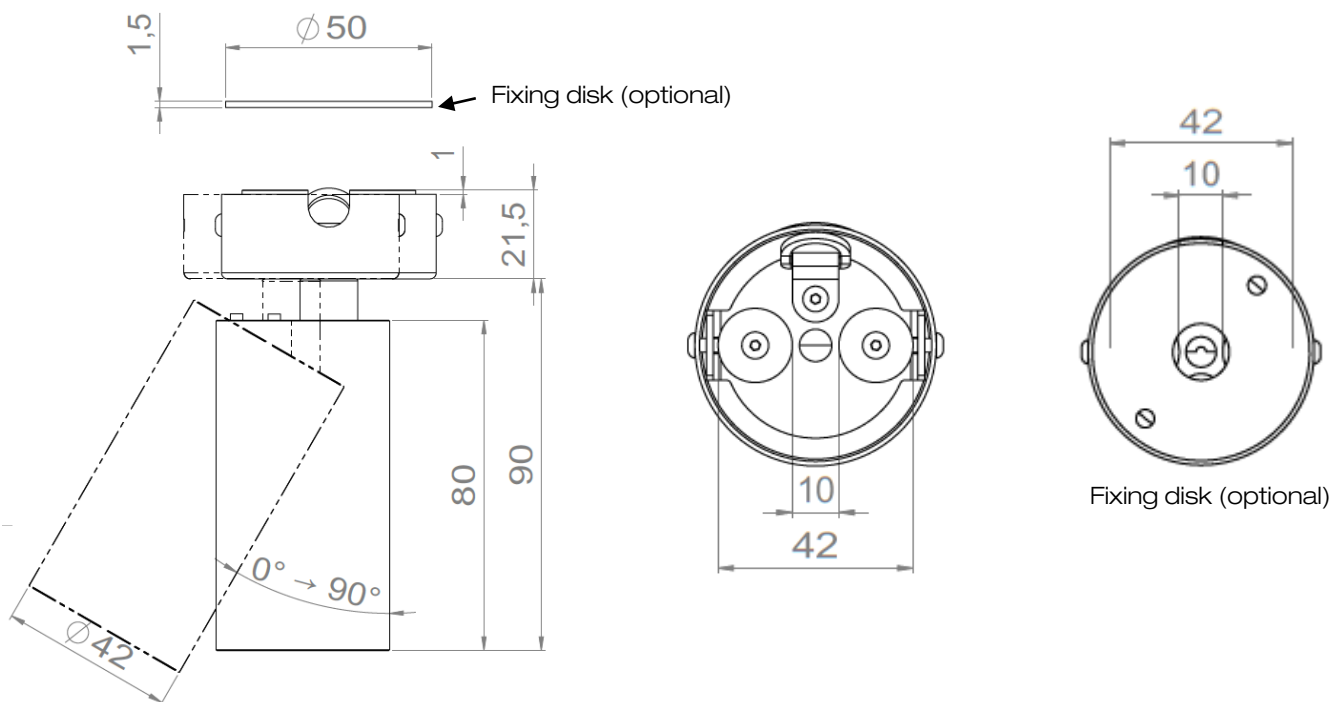

Cable output from behind

Cable output on the side

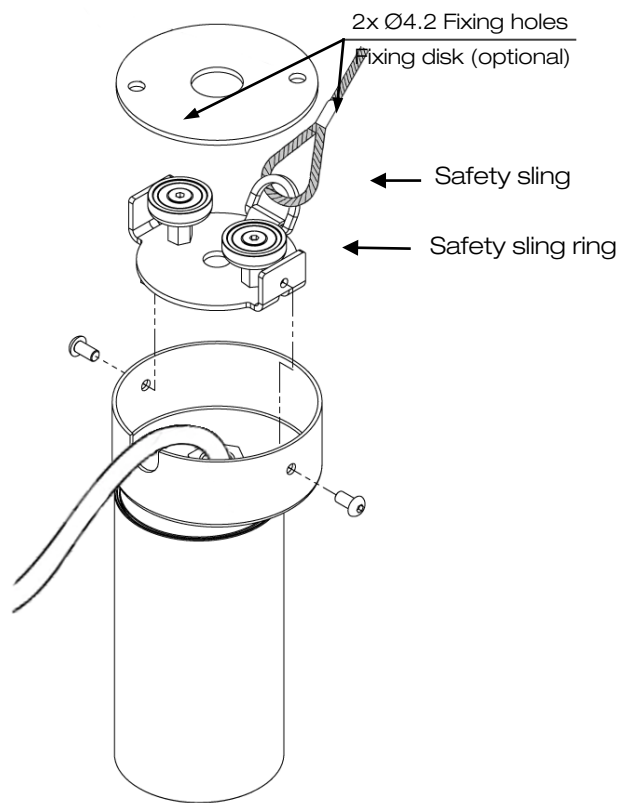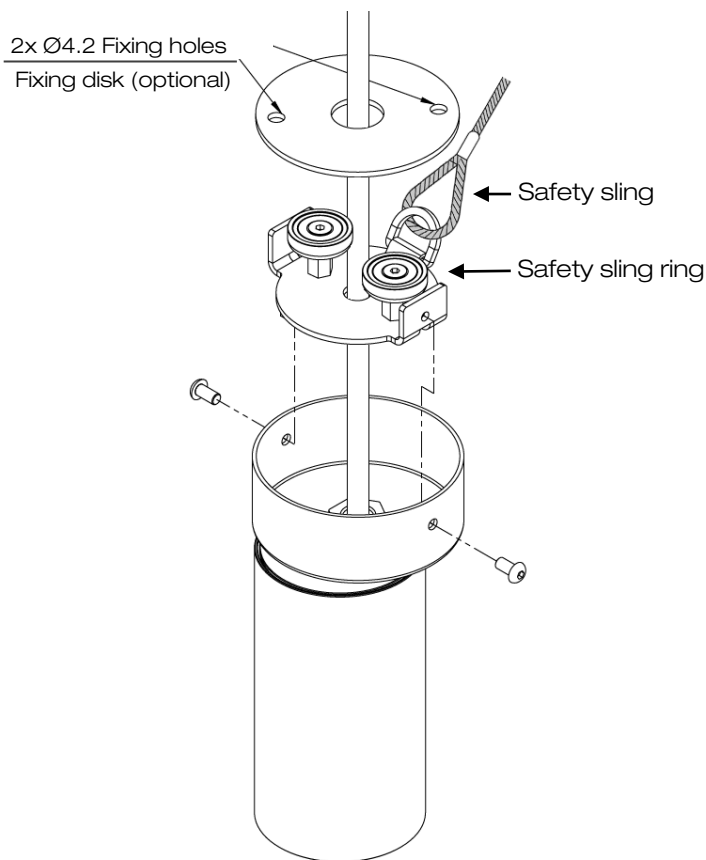

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update: 2025.10.15

Louss

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D42 WALL-MOUNTED • Round • Round Magnetic

LOuss **Permuto** – easy swap system

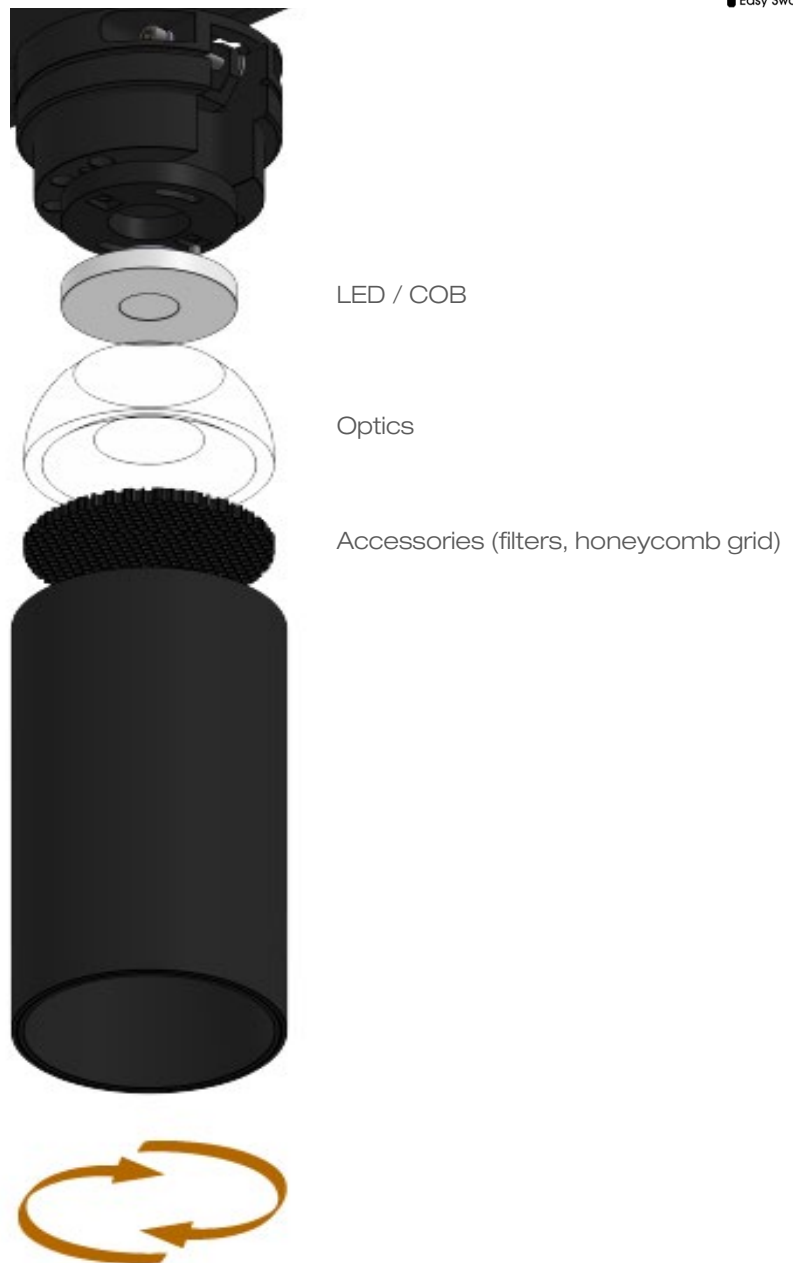

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOuss

Last update: 2025.10.15

Firalux & LOuss brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




ROUND WALL-MOUNTED

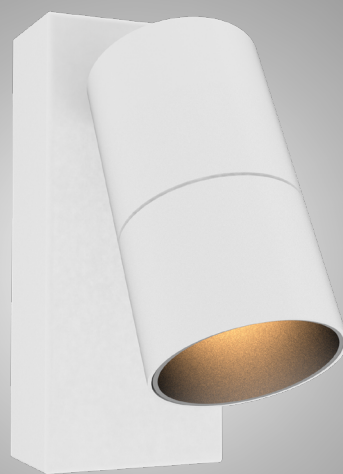

RECTANGULAR WALL-MOUNTED

AURORE D52 WALL-MOUNTED





**ROUND
WALL-MOUNTED**



**RECTANGULAR
WALL-MOUNTED**

Range	Highly adjustable luminaires for general & accent lighting	
Description	Low luminance Rotation 360° - Adjustable tilt 90°	
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)	
Dimensions	Round Wall-Mounted	Rectangular Wall-Mounted
	Spotlight diameter : 52mm Spotlight length : 95mm (13W) 140mm (20W) Box diameter : 52mm	Spotlight diameter : 52mm Spotlight length : 95mm (13W) 140mm (20W) Box dimensions : 142.5x60.5mm
Net weight	0.3kg	0.8kg
LED characteristics	2700K – 3000K – 3500K – 4000K – 5000K (other upon request) MacAdam ellipse : 3 SDCM (standard) – 2 SDCM (premium) CRI 90 (standard) – CRI 95, R9 > 90 (premium)	
Optical beams	7° - 12° - 15° - 25° - 30° - 40° - Asymetrical – Elliptical UGR < 15	
Accessories	Filters, honeycomb grid upon request	
Luminous flux	600 to 2,000 lumen according to version	
Connection	Supplied with 0.5m cable or connectors in the wall-mounted box	
Power supply	All Versions	Rectangular Wall-Mounted
	Remote constant current driver 1400mA max. according to version Dimmable driver upon request For US & Canada, use a driver UL class 2	Driver 700mA max. integrated in the box For US & Canada, use a driver UL class 2
Power	6W to 25W according to version	
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use	
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in	

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update: 2025/06/13

2/3

LOuss

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z



Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE


Firalux & LOuss brands



AURORE D52 ROUND WALL-MOUNTED

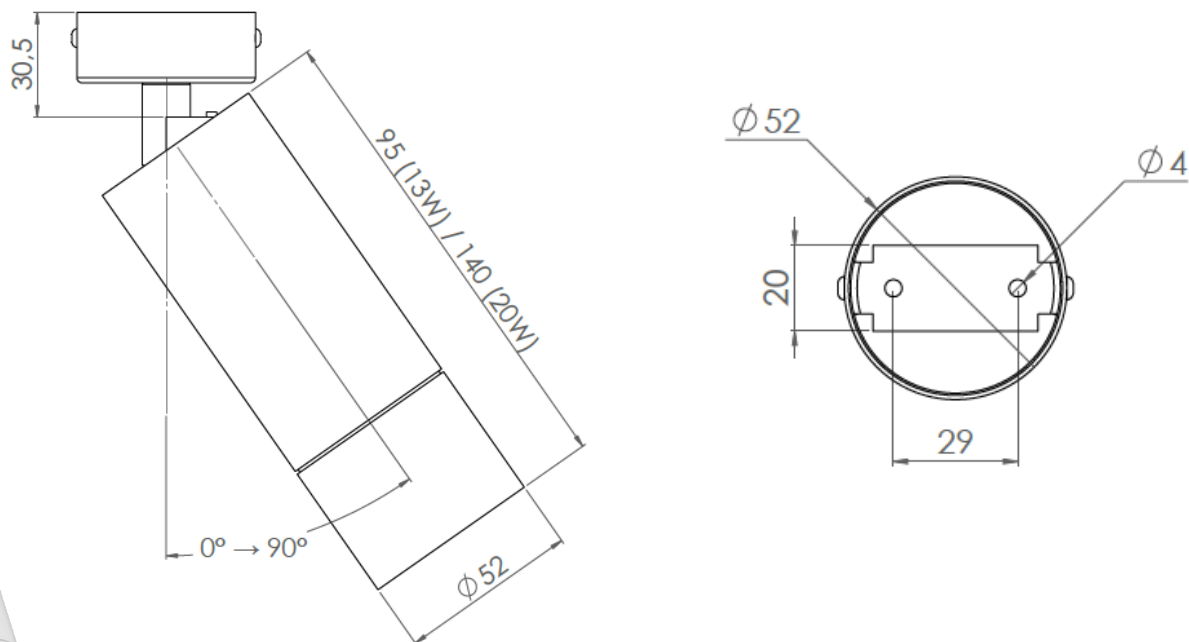

AURORE D52 RECTANGULAR WALL-MOUNTED

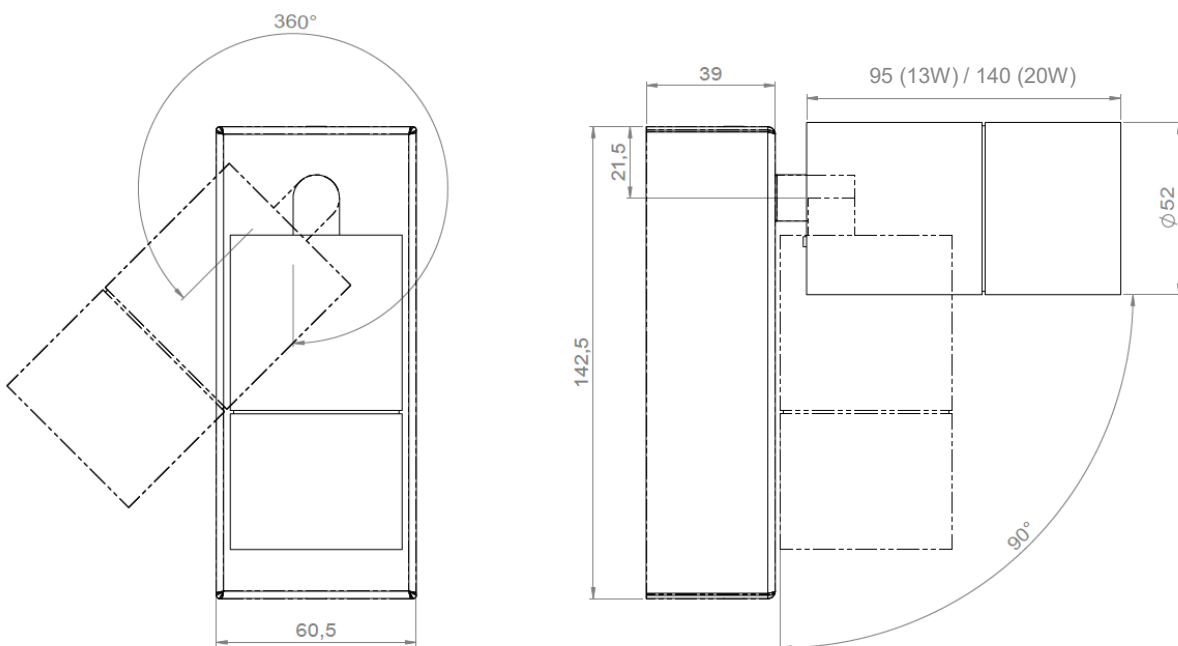

13W version



20W version

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Louss


Last update: 2025/06/13

Firalux & LOuss brands



SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D52 PIVOT

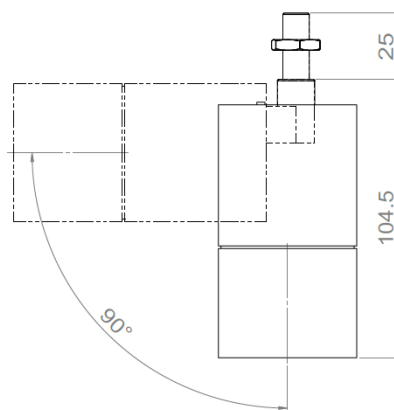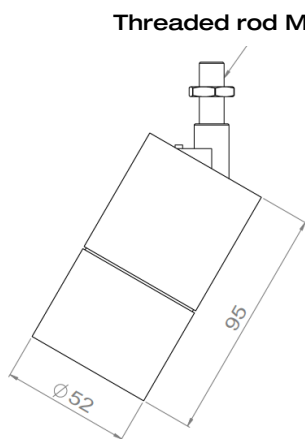

AURORE D52 PIVOT

Range	Highly adjustable luminaire for general & accent lighting
Description	Low luminance Rotation 360° - Adjustable tilt 90° max
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)
Dimensions	Spotlight diameter : 52mm Spotlight length : 95mm
Net Weight	0.5kg
LED characteristics	2700K – 3000K – 4000K – 5000K (other upon request) MacAdam ellipse: 3 SDCM (standard) – 2 SDCM (premium) CRI 90 (standard) – CRI 95, R9 > 90 (premium)
Optical beams	7° - 12° - 15° - 20° - 25° - 30° - 35° - Elliptical UGR < 15
Accessories	Filters, honeycomb grid
Luminous flux	600 to 2,000 lumen according to version
Installation	Fixation with threaded rod M10x1 + fixing nut
Connection	Supplied with 0.5m cable
Power supply	Remote constant current driver 1400mA max. according to version Dimmable driver upon request For US & Canada, use a driver UL class 2
Power	6W to 13W according to version
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged
Last update : 2025/06/13

2/2


LOuss

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D55 WALL-MOUNTED



AURORE D55 ROUND WALL-MOUNTED

Range	Highly adjustable luminaires for general & accent lighting
Description	Luminaire equipped with low luminance spotlight Rotation 360° - Adjustable tilt 90° max Easily changeable LED, optics and accessories on-site without any tool, with integrated Permuto Easy Swap system (see page 4)
Finish	Black RAL 9005 matt finish White RAL 9003 matt finish (other upon request)
Dimensions	Spotlight diameter : 55mm Spotlight length : 95mm Wall-mounted box diameter : 52mm
Net weight	0.350kg
LED characteristics	2700K - 3000K – 3500K – 4000K – 5000K (other upon request) MacAdam ellipse : 3 SDCM (standard) – 2 SDCM (premium) CRI90 (standard version) – CRI95, R9 > 80
Optical beams	13° - 18° - 24° -32° (CRI < 98) 7° (IRC 90) UGR < 15
Accessories	Filters, honeycomb grids upon request
Luminous flux	600 to 2,000 lumen according to version
Connection	Supplied with 0.5m cable Or connectors in the box
Power supply	Remote constant current driver 1400mA max. according to version Dimmable driver upon request For US & Canada, use a driver UL class 2
Power	6W to 25W according to version
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

2/4

LOuss

Last update: 2025/06/13

Firalux & LOuss brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D55 ROUND WALL-MOUNTED

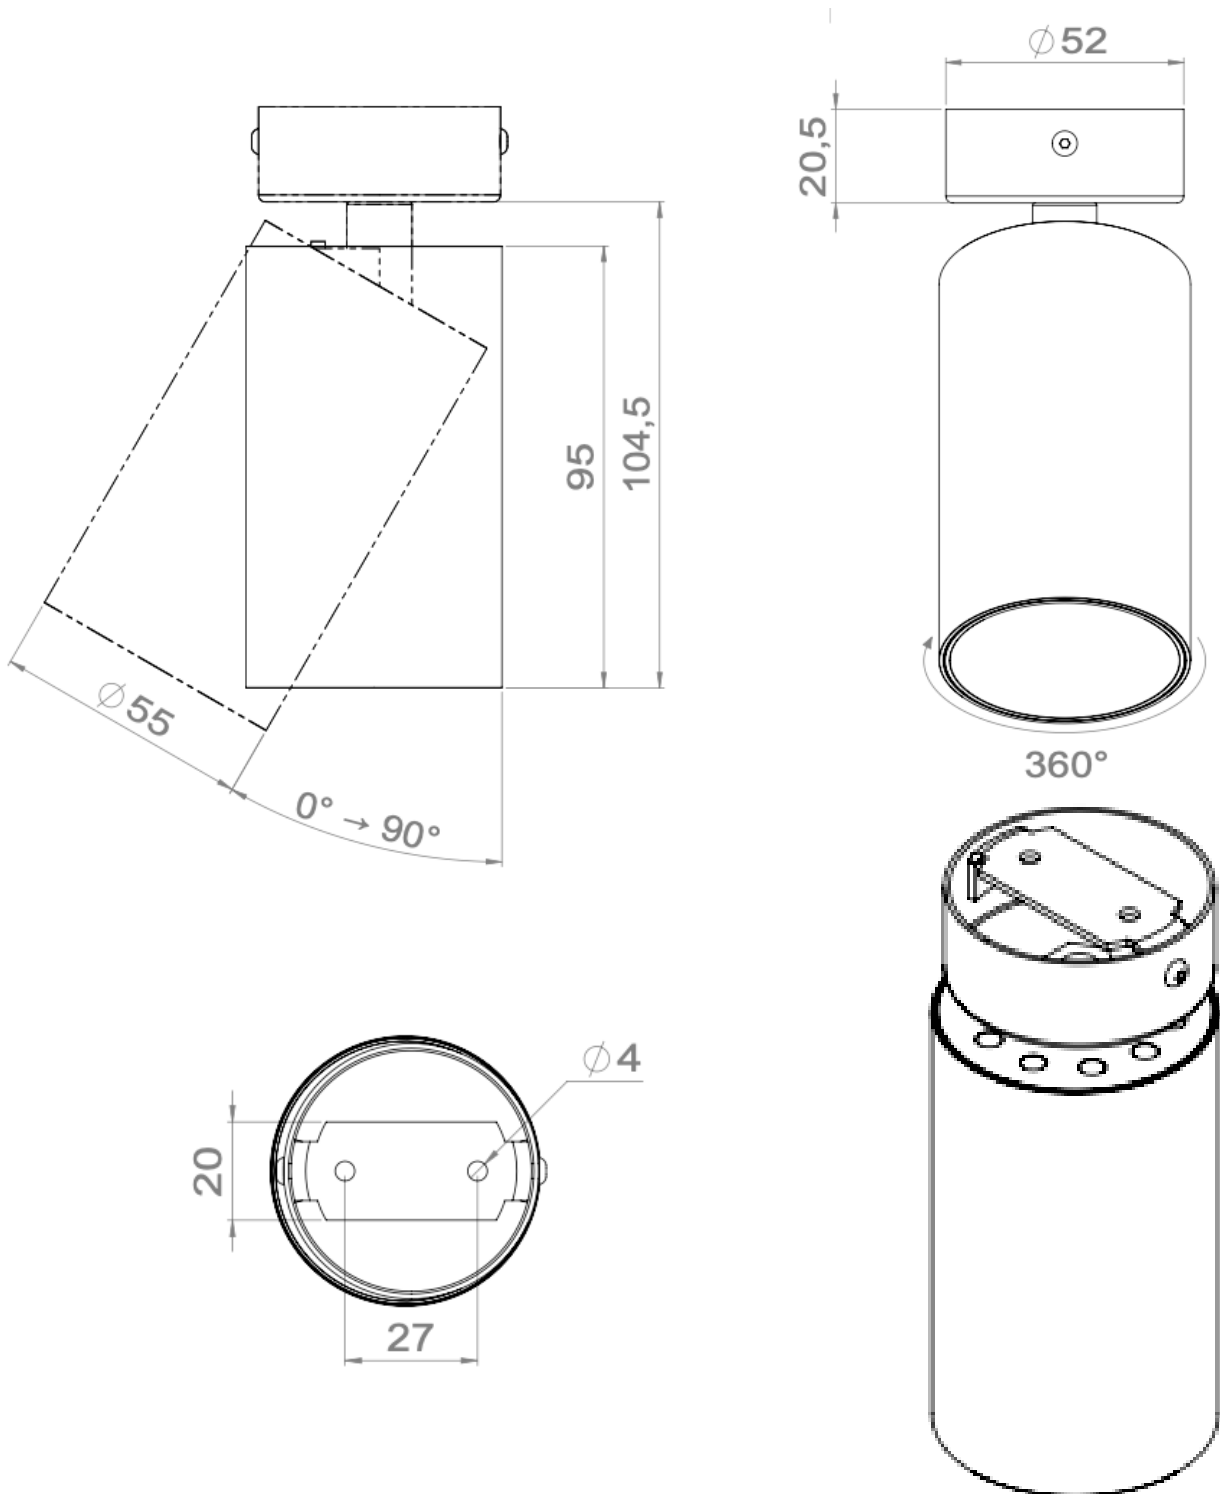

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOUSS

Last update: 2025/06/13

3/4

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D55 ROUND WALL-MOUNTED



L'Ouss **Permuto** – easy swap system

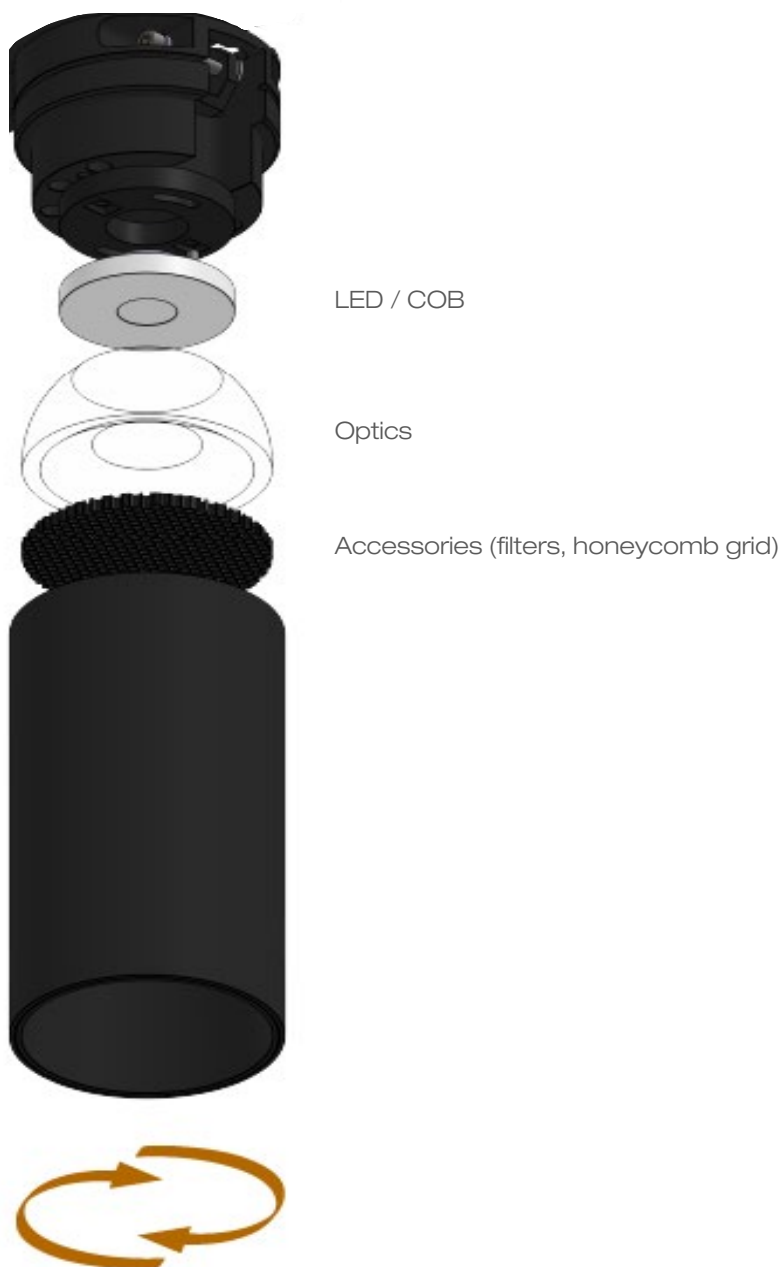

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

L'Ouss

Last update: 2025/06/13

Firalux & L'Ouss brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




ROUND WALL-MOUNTED

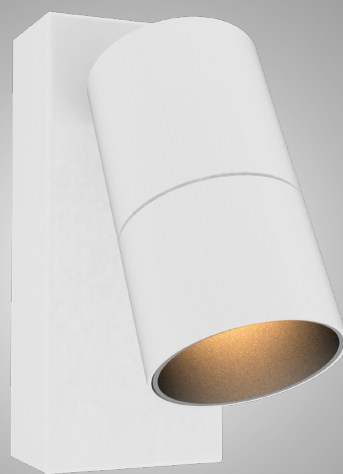

RECTANGULAR WALL-MOUNTED

AURORE D60 WALL-MOUNTED





AURORE D60 • Round Wall-Mounted • Rectangular Wall-Mounted

Range	Highly adjustable luminaires for general & accent lighting	
Description	Low luminance Rotation 360° - Adjustable tilt 90°	
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)	
Dimensions	Round Wall-Mounted	Rectangular Wall-Mounted
	Spotlight diameter : 52mm Spotlight length : 145mm Box diameter : 52mm	Spotlight diameter : 52mm Spotlight length : 140 mm Box dimensions : 142.5x61mm
Net weight	0.3kg	0.8kg
LED characteristics	2700K – 3000K – 3500K – 4000K – 5000K (other upon request) MacAdam ellipse : 3 SDCM (standard) – 2 SDCM (premium) CRI 90 (standard) – CRI 95, R9 > 90 (premium)	
Optical beams	7° - 12° - 15° - 25° - 30° - 40° - Asymetrical – Elliptical UGR < 15	
Accessoires	Filters, honeycomb grid upon request	
Luminous flux	600 to 2,000 lumen according to version	
Connection	Delivered with 0.5m cable or connectors in the round or rectangular box	
Separated Power supply	Remote constant current driver 1400mA max. according to version Dimmable driver upon request	
Integrated Power supply	Rectangular wall-mounted : driver 700mA max. integrated in the box	
Power	6W to 25W according to version	
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use	
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in	

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update: 2025/06/13

2/3

LOuss

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z



Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE


Firalux & LOuss brands



AURORE D60 ROUND WALL-MOUNTED

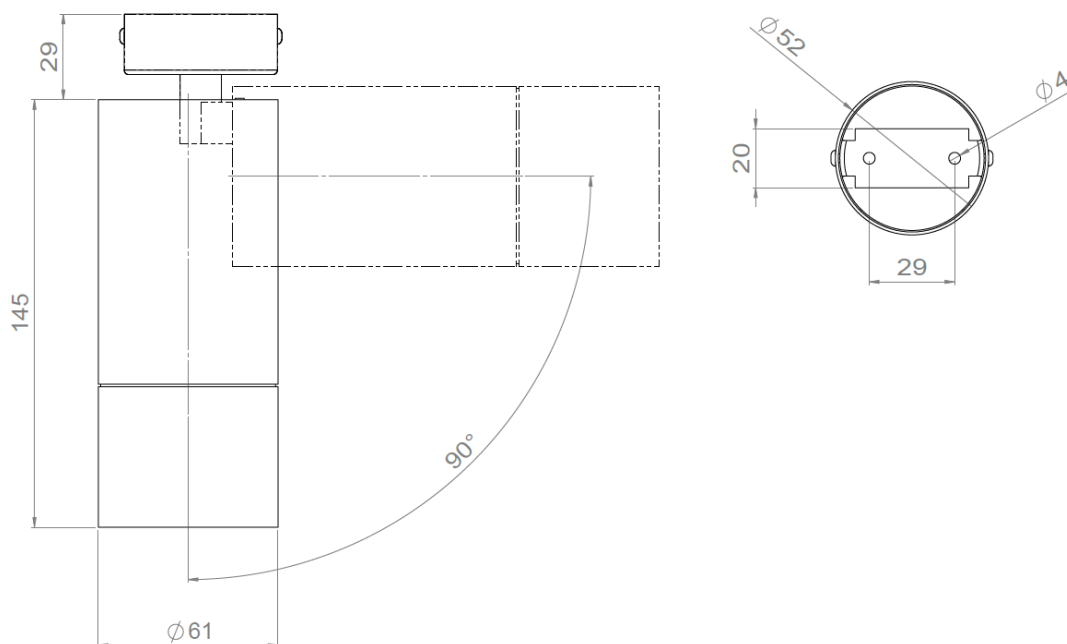

AURORE D60 RECTANGULAR WALL-MOUNTED

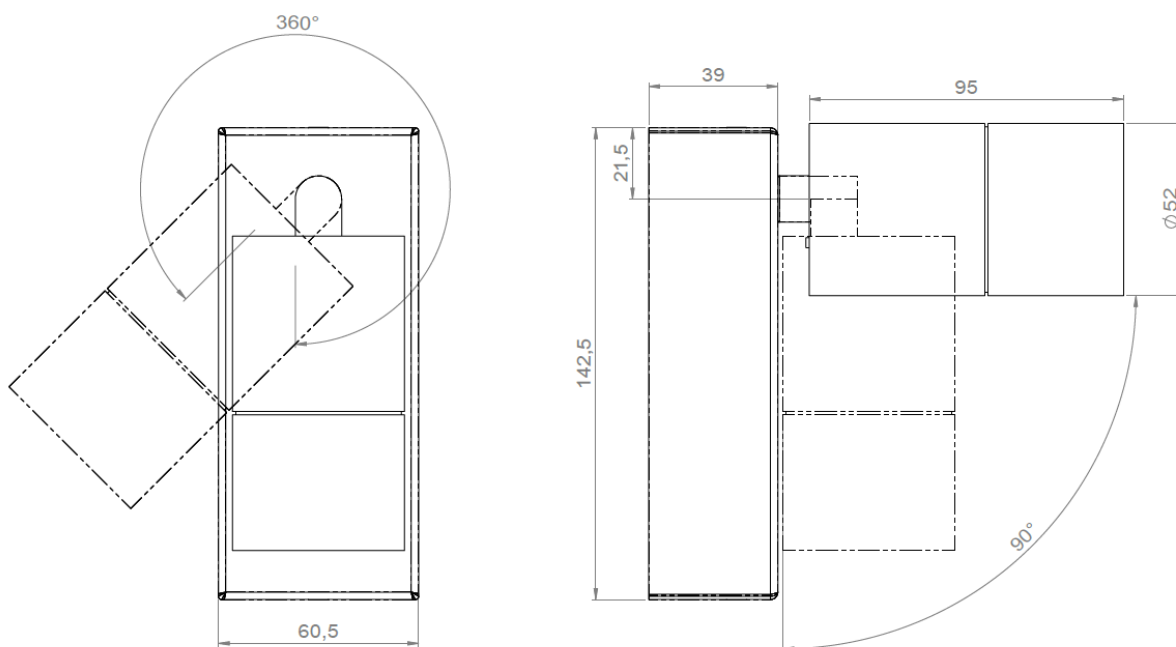

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

lOuss


Last update: 2025/06/13

Firalux & LOuss brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D60 PIVOT

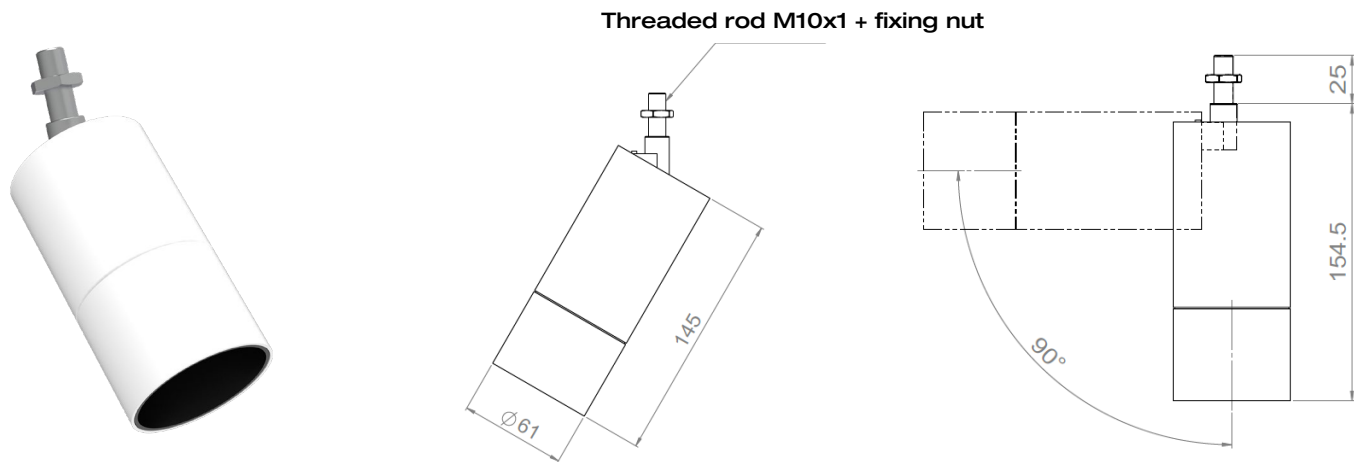

AURORE D60 PIVOT

Range	Highly adjustable luminaire for general & accent lighting
Description	Luminaire equipped with low luminance spotlight Rotation 360° - Adjustable tilt 90° max
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)
Dimensions	Spotlight diameter : 61mm Spotlight length : 145mm
Net Weight	0.5kg
LED characteristics	2700K – 3000K – 4000K – 5000K (other upon request) MacAdam ellipse: 3 SDCM (standard) – 2 SDCM (premium) CRI 90 (standard) – CRI 95, R9 > 90 (premium)
Optical beams	7° - 12° - 15° - 25° - 30° - 40° - Elliptical
Accessories	Filters, honeycomb grid
Installation	Fixation with threaded rod M10x1 + fixing nut
Connection	Supplied with 0.5m cable
Power supply	Remote constant current driver 1400mA max. according to version Dimmable driver upon request For US & Canada, use a driver UL class 2
Power	6W to 25W according to version
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

2/2

LOuss


Last update : 2025/06/13

Firalux & LOuss brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

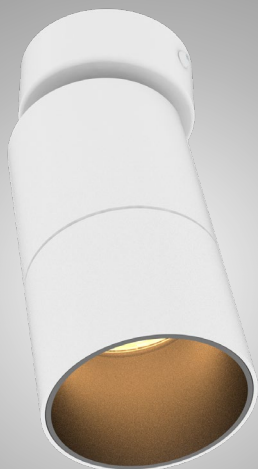

ROUND WALL-MOUNTED

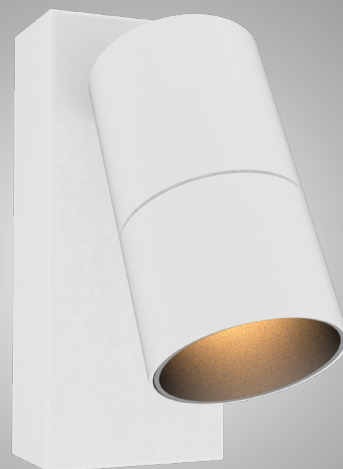


RECTANGULAR WALL-MOUNTED

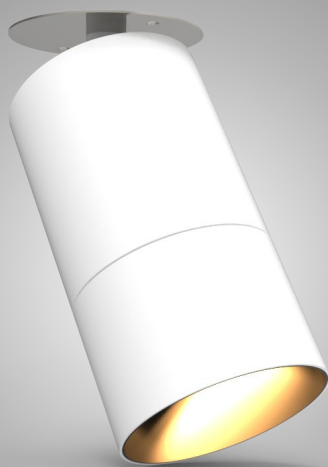

ON-PLATE

AURORE D82 WALL-MOUNTED





**ROUND
WALL-MOUNTED**



**RECTANGULAR
WALL-MOUNTED**



ON-PLATE

Range	Highly adjustable luminaires for general & accent lighting		
Description	Low luminance 1 LED or 3 LEDs versions Rotation 360° - Adjustable tilt 88°		
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)		
Dimensions	Round Wall-Mounted	Rectangular Wall-Mounted	On-Plate
	Spotlight diameter : 52mm Spotlight length : 146mm Box diameter : 52mm	Spotlight diameter : 52mm Spotlight length : 146mm Box dimensions : 81x170mm	Spotlight diameter : 52mm Spotlight length : 146mm Plate diameter : 81mm
Net weight	0.8kg	1.3 kg	0.9 kg
LED characteristics	1 LED		3 LEDs
	2700K – 3000K – 3500K - 4000K – 5000K (other upon request) MacAdam ellipse : 3 SDCM (standard) 2 SDCM (premium)		2700K – 3000K – 3500K - 4000K – 5000K (other upon request) Tunable white version : 3 LED 2700K – 4000K – 6500K RGB version
	CRI 90 (standard) – CRI 95, R9 > 90 (premium)		
Optical beams	1 LED		3 LEDs
	7° - 12° - 15° - 25° - 30° - 40° - Elliptical UGR < 15		20° - 30° UGR < 15
Accessories	Filters, honeycomb grid upon request		
Luminous flux	1 LED		3 LEDs
	1500 to 2500Lm according to version		2300 to 2600 Lm according to version
Connection	1 LED		3 LEDs
	Supplied with 0.5m cable or connectors in the box (except for On-plate version)		Supplied with 0.5m of 8-conductor cable Daisy-chain option : 2 input/output cables for serial wiring
Power supply	All versions (1 LED)	Rectangular W.-M (1 LED)	All versions (3 LEDs)
	Remote constant current driver 1400mA max. according to version Dimmable driver upon request	Constant current driver 700mA max. integrated in the box	Remote constant current DMX driver 700mA max (1A possible with driver flanged at 30W)
	For the US & Canada, use a driver UL class 2		

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged
Last update: 2025/06/13

2/5

Louss

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



**ROUND
WALL-MOUNTED**



**RECTANGULAR
WALL-MOUNTED**



ON-PLATE

Power	1 LED	3 LEDs
	6W to 25W according to version	35W max.
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use	
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in	

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOuss

Last update: 2025/06/13



3/5


Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z



Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

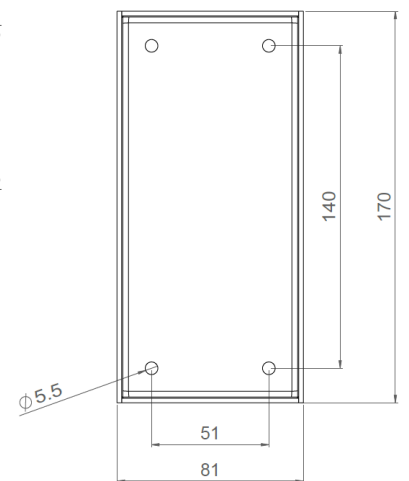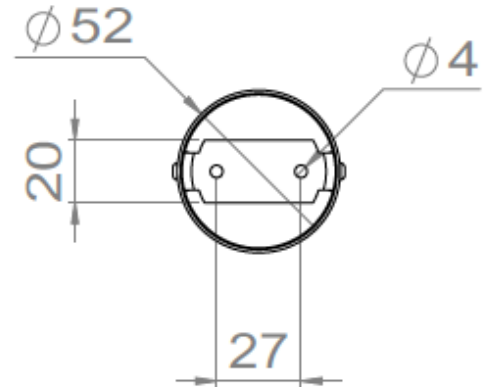



AURORE D82 ON-PLATE

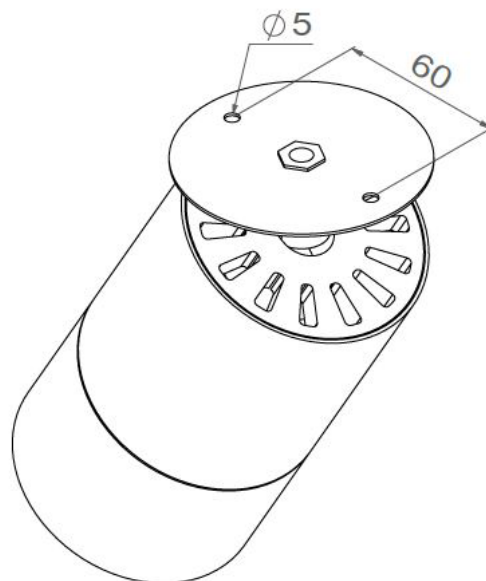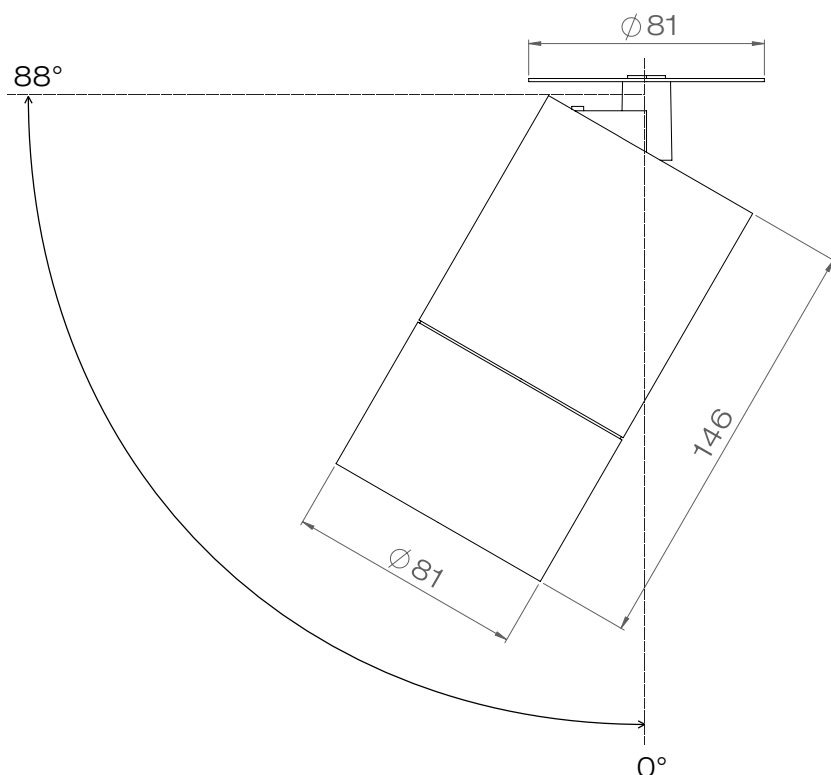

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOUSS

Last update: 2025/06/13

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE