


**COMEDIA**






COMEDIA S1

Range	Powerful floodlighting
Description	Front face in transparent polycarbonate Back case in black painted aluminium Hanging or adjustable recessed mountings on back case
Dimensions & Weight	Length : 600mm Width : 100mm Height : 95mm 2.5 kg
LED characteristics	8 COB : 2700K – 3000K – 3500K – 4000K CRI > 90 (CRI95 upon request)
Luminous flux	10,500 lumen max.
Optical beams	15° - 20° - 25° - 30° - 35° Collimator-type silicone optics
Connection	Supplied with 1m cable (more length upon request)
Power supply	From 70W to 120W external constant current driver Dimmable driver upon request (0-10V dimmable driver, PWM or DALI driver)
Power	60 to 120W max.
Use limitations	The product must be installed in a ventilated area  Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees  The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span : L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature.  3-year parts and labour warranty  The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lightning injury, as well as the normal wear of the product  All products are electrically tested and received a functional burn-in

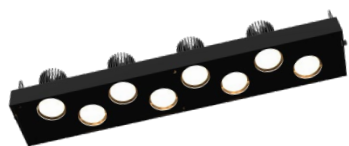

## COMEDIA S1

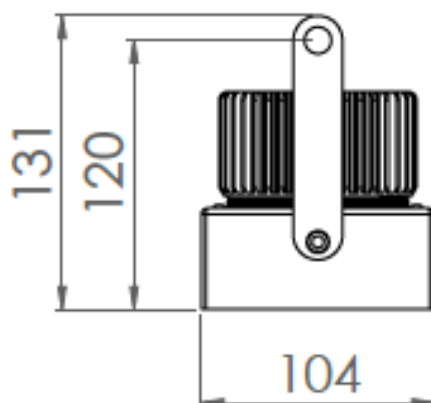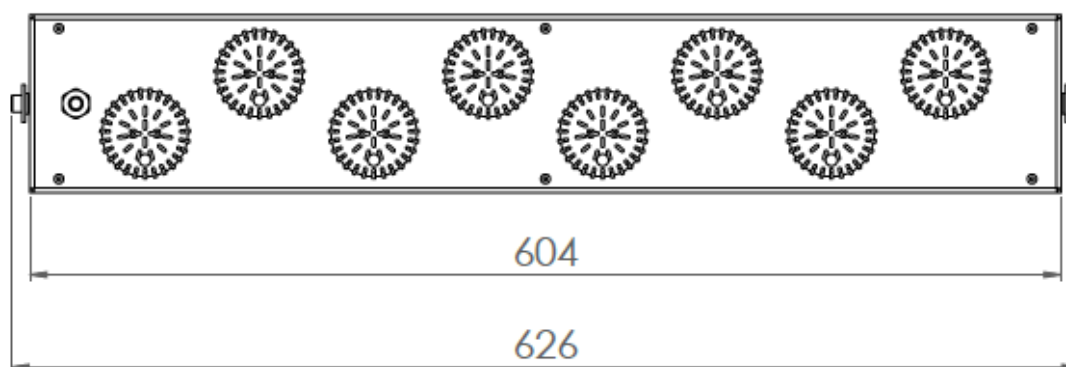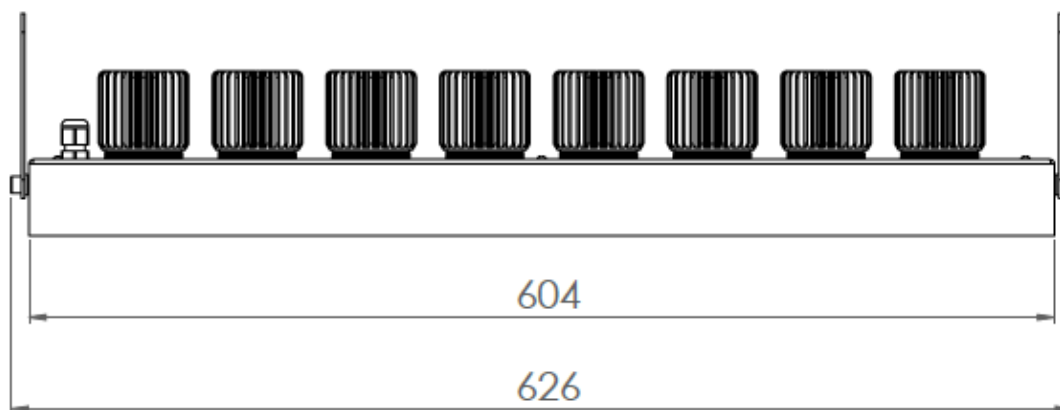

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged.

3/3

**LOUSS**

Last update : 2025/06/24

*Firalux & LOUSS brands*

SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best group

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE