

COMEDIA








COMEDIA S1

Range	Powerful floodlighting
Description	Front face in transparent polycarbonate Back case in black painted aluminium Hanging or adjustable recessed mountings on back case
Dimensions & Weight	Length : 600mm Width : 100mm Height : 95mm 2.5 kg
LED characteristics	8 COB : 2700K – 3000K – 3500K – 4000K CRI > 90 (CRI95 upon request)
Luminous flux	10,500 lumen max.
Optical beams	15° - 20° - 25° - 30° - 35° Collimator-type silicone optics
Connection	Supplied with 1m cable (more length upon request)
Power supply	From 70W to 120W external constant current driver Dimmable driver upon request (0-10V dimmable driver, PWM or DALI driver)
Power	60 to 120W max.
Use limitations	The product must be installed in a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOUSS, must be approved before use
Warranty	Life span : L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lightning injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.



COMEDIA S1

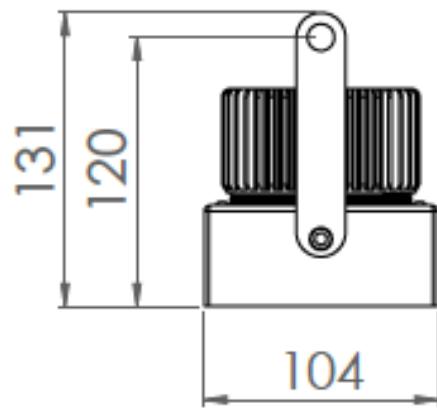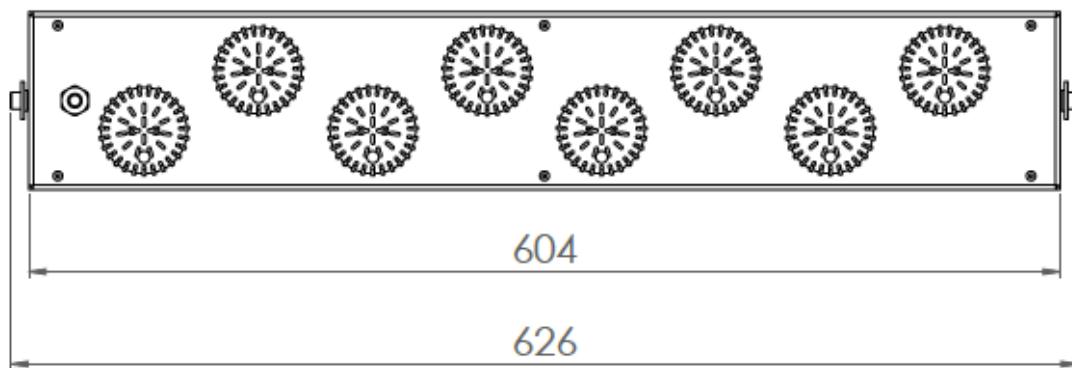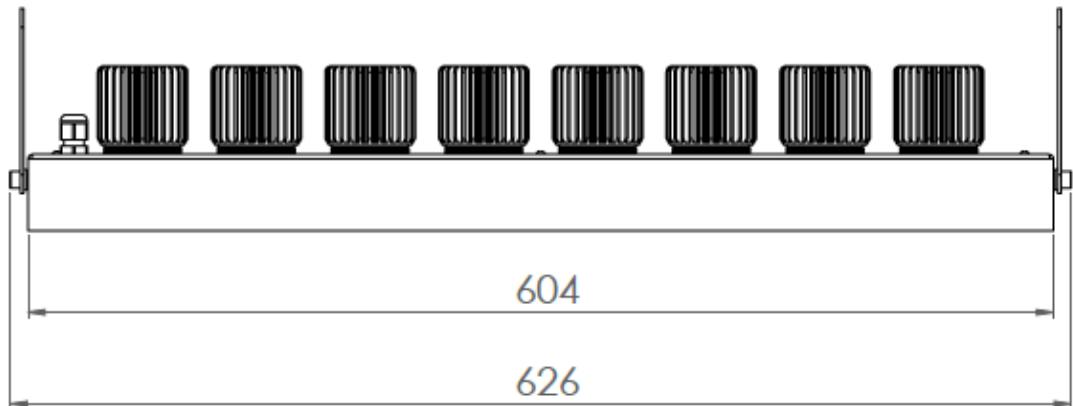

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Last update : 2025.06.24

3/3

LOUSS

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOUSS

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE