





LOUSS

Lighting Emotion



COMEDIA S1



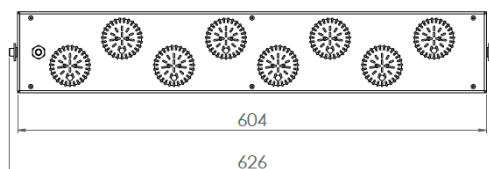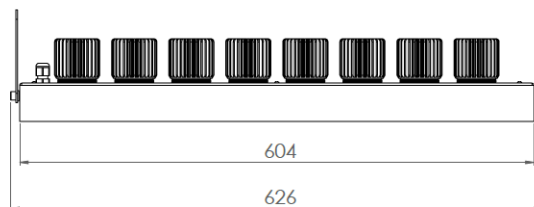

COMEDIA S1

Range	Powerful floodlighting
Description	Front face in transparent polycarbonate Back case in black painted aluminium Hanging or adjustable recessed mountings on back case
Dimensions	600x100x95mm
LED characteristics	8 COB LED: 2700K – 3000K – 3500K - 4000K IRC > 90 (IRC95 upon request) Output light flux up to 10,500 lumen
Optical beam	15° - 20° - 25° - 30° - 35°
Connection	Delivered with 1m standard cable (more length upon request)
Separate power supply	From 70W to 120W external constant current driver Optional: 0-10V dimmable driver, PWM, or DALI drivers
LED power	LED output: from 60W to 120W max.
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up,
otherwise the luminaire could be seriously damaged.

LOuss

Last update: 19/02/2020

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE