




# LOUSS

Lighting Emotion



## COMEDIA S3



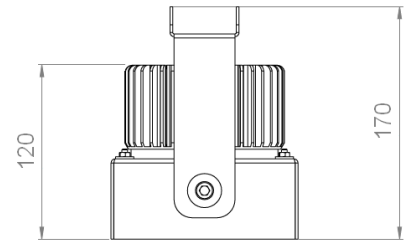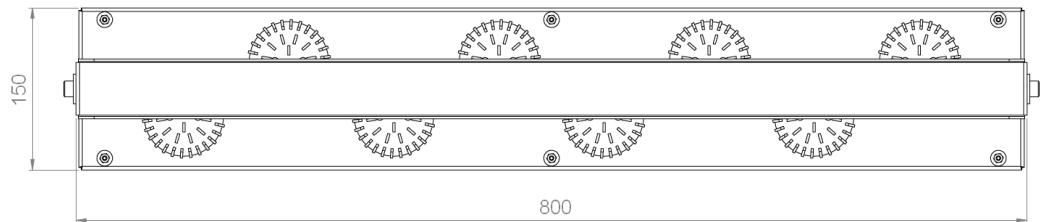

## COMEDIA S3

<b>Range</b>	Powerful floodlighting
<b>Description</b>	Front face in transparent polycarbonate Back case in black painted aluminium Hanging or adjustable recessed mountings on back case
<b>Dimensions</b>	1200x200x200mm
<b>LED characteristics</b>	4 COB LED: 2700K – 3000K – 3500K - 4000K CRI 80 - 90 (CRI95 upon request) Output light flux up to 24,000 lumen
<b>Optical beam</b>	90° - 150°
<b>Connection</b>	Delivered with 1m standard cable (more length upon request)
<b>Separate power supply</b>	From 200W to 300W external constant current driver Optional: 0-10V dimmable driver, PWM, or DALI drivers
<b>LED power</b>	LED output: from 170W to 250W max.
<b>Use limitations</b>	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
<b>Warranty</b>	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up,  
otherwise the luminaire could be seriously damaged.

LOuss

Last update: 19/02/2020

Firalux & LOuss brands

SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
www.louss.fr  
Best group

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE