



Wouss

Lighting Emotion



GALAXIO 90



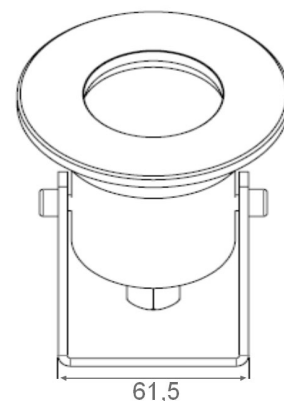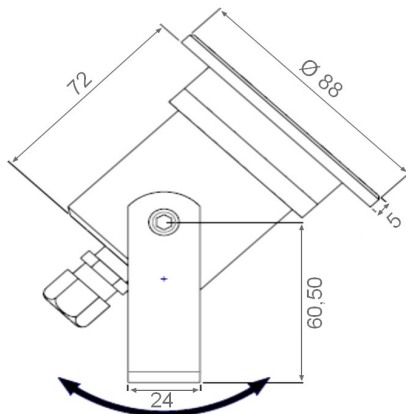

GALAXIO 90

Range	Surface mounted architectural floodlighting
Description	Body in brushed stainless steel Armored glass protective shield Stainless steel fixing bracket
Dimensions	External diameter : 88mm Bracket width : 24mm Bracket length : 61.5mm
Net weight	0.916 kg
LED characteristics	3 LEDs : 2200K – 2700K – 3000K – 4000K – 5000K – 6500K (other upon request)
Optical beams	15° - 20° - 25° - 30° - 35° - 40° - 60° (other upon request)
Connection	Supplied with 1m cable (other length upon request)
Separate power supply	350mA max. external constant current driver For the US & Canada use a UL class 2 driver
LED power	3.6W at 350mA max.
Use limitation	The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labor warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

LOuss

Last update : 2025.07.29

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE