



Wouss

Lighting Emotion

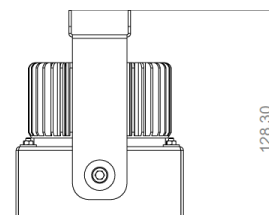

COMEDIA

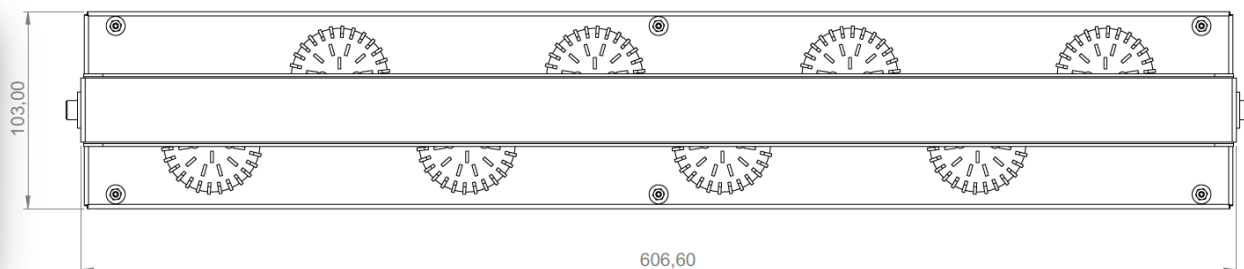

COMEDIA

Common characteristics

Range	Powerful floodlighting
Description	Front face in transparent polycarbonate Back case in black painted aluminium Hanging or adjustable recessed mountings on back case
Connection	Delivered with 1m standard cable (more length upon request)
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (T_a) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up, otherwise the luminaire could be seriously damaged.

LOuss



Last update : 20/09/2018

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Phillibert
21220 Gevrey Chambertin - FRANCE

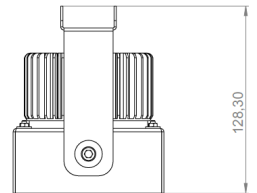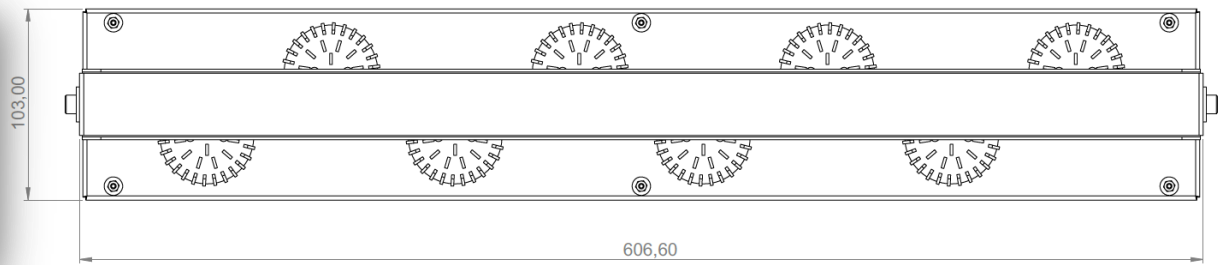

COMEDIA S1

Dimensions	600x100x95mm
Net Weight	2.5 kg
LED characteristics	8 COB LED: 2700K – 3000K – 3500K - 4000K IRC > 90 (IRC95 upon request) Output light flux up to 10,500 lumen
Optical beam	15°-20°- 25°- 30°-35°
Connection	Delivered with 1m standard cable (more length upon request)
Separated power supply	From 70W to 120W external constant current driver Optional: 0-10V dimmable driver, PWM, or DALI drivers
Power consumption	LED output: from 60W to 120W max.

All the connections have to be made before powering up,
otherwise the luminaire could be seriously damaged.

Louss


Last update : 20/09/2018

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

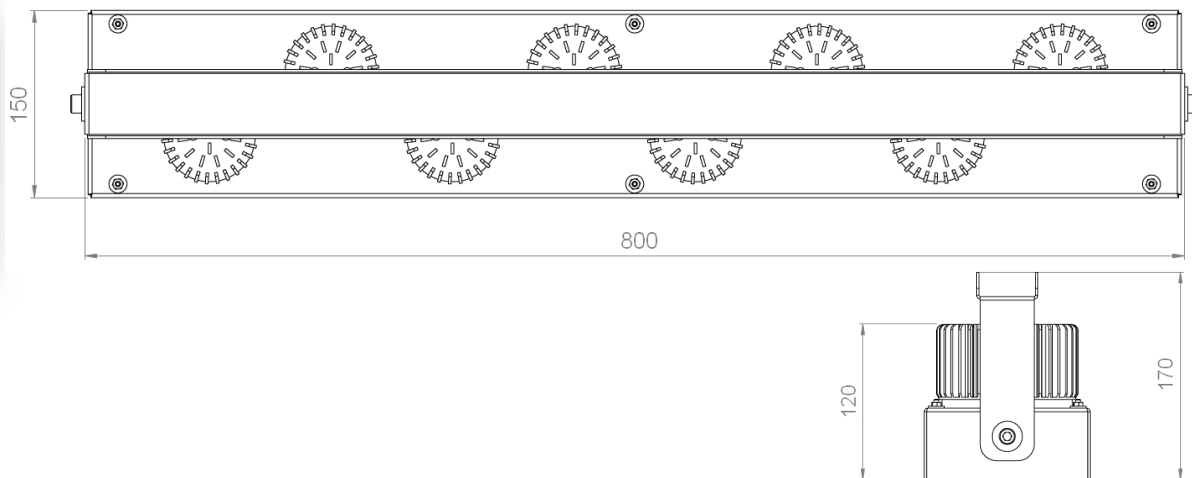

COMEDIA S2

Dimensions	800x150x120mm
Net Weight	2.5 kg
LED characteristics	4 COB LED: 2700K – 3000K – 3500K - 4000K IRC > 90 (IRC95 upon request) Output light flux up to 18,000 lumen
Optical beam	45° - 60° - 70° - 90°
Connection	Delivered with 1m standard cable (more length upon request)
Separated power supply	From 120W to 200W external constant current driver Optional: 0-10V dimmable driver, PWM, or DALI drivers
Power consumption	LED output: from 100W to 170W max.

All the connections have to be made before powering up, otherwise the luminaire could be seriously damaged.

Louss



Last update : 20/09/2018

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

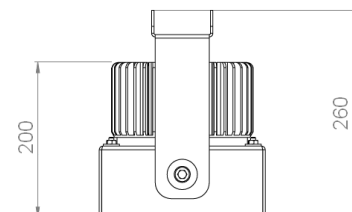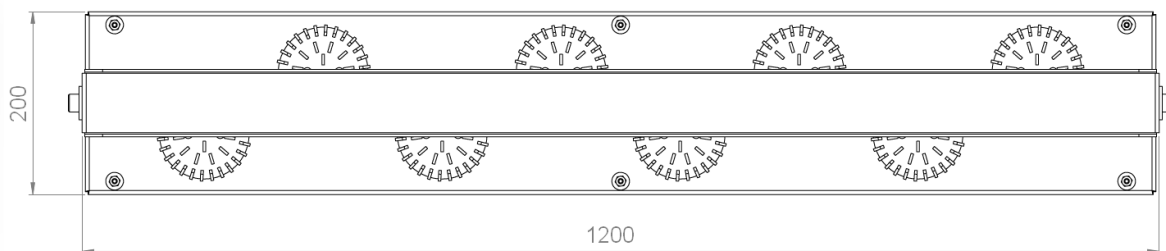

COMEDIA S3

Dimensions	1200x200x200mm Hauteur avec lyre: 260mm
Net weight	2.5 kg
LED characteristics	4 COB LED: 2700K – 3000K – 3500K - 4000K IRC 80 - 90 (IRC95 upon request) Output light flux up to 24,000 lumen
Optical beam	90° - 150° Optiques silicone qui assurent la protection de la LED (eau poussière)
Connection	Delivered with 1m standard cable (more length upon request)
Separated power supply	From 200W to 300W external constant current driver Optional: 0-10V dimmable driver, PWM, or DALI drivers
Power consumption	LED output: from 170W to 250W max.

All the connections have to be made before powering up, otherwise the luminaire could be seriously damaged.

LOUSS

Last update : 20/09/2018

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE