


# Wouss

Lighting Emotion



C60 TRIM • C75 TRIM

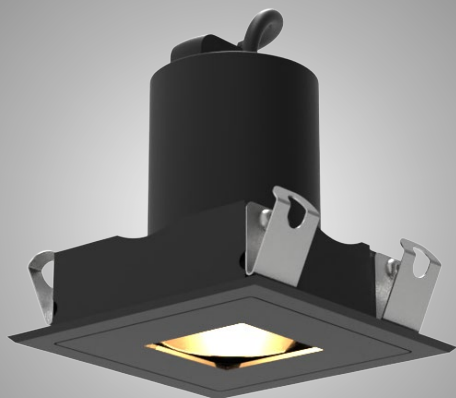


C60 TRIMLESS • C75 TRIMLESS



D70 TRIM • D85 TRIM




D70 TRIMLESS • D85 TRIMLESS



## LEVANA

The secret downlight

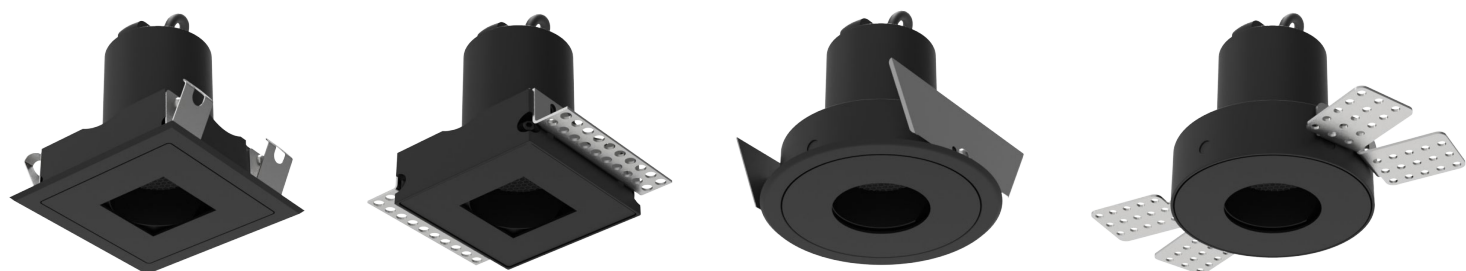

**LEVANA • C60 & C75 Trim • C60 & C75 Trimless • D70 & D85 Trim • D70 & D85 Trimless**

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                |                  |                                                      |            |                            |                   |                                                     |            |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|------------------------------------------------------|------------|----------------------------|-------------------|-----------------------------------------------------|------------|
| Range                      | Square (C reference) or round (D reference) adjustable recessed downlight for general & accent lighting                                                                                                                                                                                                                                                                                                        |                  |                                                      |            |                            |                   |                                                     |            |
| Description                | Luminaire to be recessed in 10 to 20mm thick BA13 plasterboard or wood ceilings<br>Aluminum mechanic parts<br>Trim versions : stainless steel fixing device<br>Trimless versions : stainless steel brackets<br>Rotation 355° - Adjustable tilt 30°<br>Low luminance<br>Easily changeable LED, optics and accessories on site, without any tool, with integrated LOuss<br>Permuto easy swap system (see page 8) |                  |                                                      |            |                            |                   |                                                     |            |
| Finish                     | White RAL 9003 matt finish<br>Black RAL 9005 matt finish<br>(other upon request)                                                                                                                                                                                                                                                                                                                               |                  |                                                      |            |                            |                   |                                                     |            |
| Dimensions & Net weight    | LEVANA C60                                                                                                                                                                                                                                                                                                                                                                                                     |                  |                                                      |            | LEVANA C75                 |                   |                                                     |            |
|                            | TRIM                                                                                                                                                                                                                                                                                                                                                                                                           |                  | TRIMLESS                                             |            | TRIM                       |                   | TRIMLESS                                            |            |
|                            | 76 x 76 x 74.8mm<br>0.250 Kg                                                                                                                                                                                                                                                                                                                                                                                   |                  | 93 x 63 x 74.8mm<br>With fixing brackets<br>0.260 Kg |            | 91 x 91 x 90mm<br>0.400 Kg |                   | 108 x 78 x 90mm<br>With fixing brackets<br>0.410 Kg |            |
|                            | LEVANA D70                                                                                                                                                                                                                                                                                                                                                                                                     |                  |                                                      |            | LEVANA D85                 |                   |                                                     |            |
|                            | TRIM                                                                                                                                                                                                                                                                                                                                                                                                           |                  | TRIMLESS                                             |            | TRIM                       |                   | TRIMLESS                                            |            |
|                            | 86mm x 74.8mm<br>0.300 Kg                                                                                                                                                                                                                                                                                                                                                                                      |                  | 136 x 73mm<br>With fixing brackets<br>0.310 Kg       |            | 101 x 90mm<br>0.450 Kg     |                   | 150 x 88mm<br>With fixing brackets<br>0.460 Kg      |            |
| LED characteristics        | 2700K - 3000K – 3500K – 4000K<br>MacAdam ellipse : 3 SDCM (standard version) – 2 SDCM (premium version)<br>CRI>90 R9>50 - CRI95 R9>90 - CRI > 95 - R1 to R15 > 90                                                                                                                                                                                                                                              |                  |                                                      |            |                            |                   |                                                     |            |
| Optical beam & Performance | LEVANA C60 / LEVANA D70                                                                                                                                                                                                                                                                                                                                                                                        |                  |                                                      |            | LEVANA C75 / LEVANA D85    |                   |                                                     |            |
|                            | Beam                                                                                                                                                                                                                                                                                                                                                                                                           | Candela          | Power                                                | Photometry | Beam                       | Candela           | Power                                               | Photometry |
|                            | 11°                                                                                                                                                                                                                                                                                                                                                                                                            | 10,900cd (3000K) | 7W                                                   | ies 2591A  | 7.5°                       | 27,500cd (3000K)  | 7W                                                  | ies 2629A  |
|                            | 16°                                                                                                                                                                                                                                                                                                                                                                                                            | 6,300 cd (3500K) | 8W                                                   | ies 2645A  | 10°                        | 19,000cd (3000K)  | 12W                                                 | ies 2336A  |
|                            | 20°                                                                                                                                                                                                                                                                                                                                                                                                            | 4,400 cd (3500K) | 7W                                                   | ies 2510A  | 13°                        | 15,000 cd (3500K) | 12W                                                 | ies 2562A  |
|                            | 23°                                                                                                                                                                                                                                                                                                                                                                                                            | 3,100 cd (3500K) | 7W                                                   | ies 2511A  | 17°                        | 7,200 cd (3500K)  | 9W                                                  | ies 2568A  |
|                            | 34°                                                                                                                                                                                                                                                                                                                                                                                                            | 1,700 cd (3500K) | 8W                                                   | ies 2617B  | 24°                        | 3,900 cd (3500K)  | 12W                                                 | ies 2558A  |
|                            | 43°                                                                                                                                                                                                                                                                                                                                                                                                            | 1,050 cd (3500K) | 7W                                                   | ies 2513A  | 34°                        | 2,300 cd (3500K)  | 12W                                                 | ies 2545A  |
|                            | UGR < 15                                                                                                                                                                                                                                                                                                                                                                                                       |                  |                                                      |            |                            |                   |                                                     |            |

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

2/8

LOuss


Last update: 2025.10.14

Firalux & LOuss brands

SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
www.louss.fr  
Best group

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE

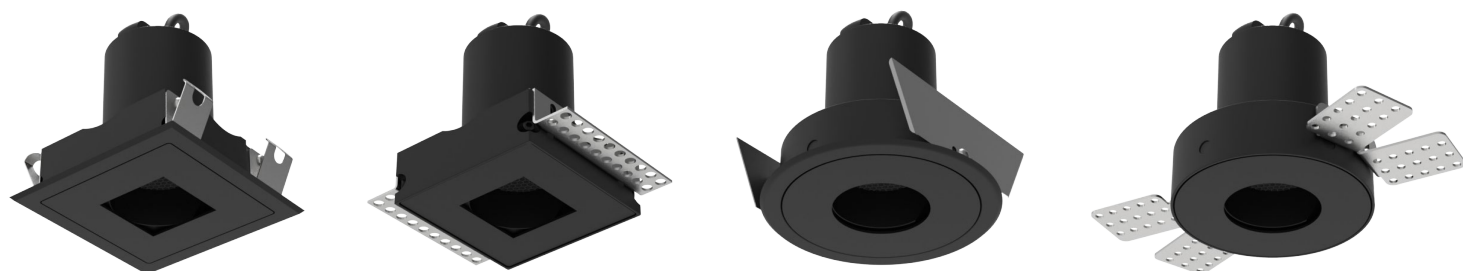

**LEVANA • C60 & C75 Trim • C60 & C75 Trimless • D70 & D85 Trim • D70 & D85 Trimless**

|                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                         |                                |                         |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|--------------------------------|-------------------------|
| Accessories     | Filter, honeycomb grid upon request                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                         |                                |                         |
| Power           | <b>LEVANA C60 / LEVANA D70</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                         | <b>LEVANA C75 / LEVANA D85</b> |                         |
|                 | TRIM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | TRIMLESS                | TRIM                           | TRIMLESS                |
|                 | < 8W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | < 8W                    | < 13W                          | < 13W                   |
| Power supply    | 150mA to 700mA max. remote constant current driver according to version<br>The drivers size, supplied by LOuss, is suitable for an installation through the flush-mounted box<br><b>Optional</b> : DALI remote driver, Casambi, driver<br>For USA & Canada use UL class 2 power supply                                                                                                                                                                                                           |                         |                                |                         |
| Installation    | <b>LEVANA C60</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>LEVANA D70</b>       | <b>LEVANA C75</b>              | <b>LEVANA D85</b>       |
|                 | Square opening<br>65 x 65mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Round opening<br>Ø 76mm | Square opening<br>80 x 80mm    | Round opening<br>Ø 91mm |
|                 | Luminaires supplied with 0.5m cable. Quick connector upon request<br><br>The drivers can be remote to a distance up to 5m max. For greater distances (10-15m max.), please contact us. Depending on the installation, anti-surge protection may be provided with the luminaires<br><br>Take into consideration the cumulative length of all the cables when connecting several luminaires in series on the same driver                                                                           |                         |                                |                         |
| Use limitations | The product must be installed into a ventilated area<br><br>Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees<br><br>The drivers, if not delivered by LOuss, must be approved before use                                                                                                                                                                           |                         |                                |                         |
| Warranty        | Life span: L80-B10 = 35,000 hours (80% remaining flux) at 30°C ambient temperature<br><br>The warranty applies to components and fabrication supplied by LOuss<br><br>The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product<br><br>All products are electrically tested and receive a functional burn-in |                         |                                |                         |

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

LOuss

Last update: 2025.10.14

3/8

Firalux & LOuss brands




SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
www.louss.fr  
Best group



Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE



## LEVANA C60 TRIM

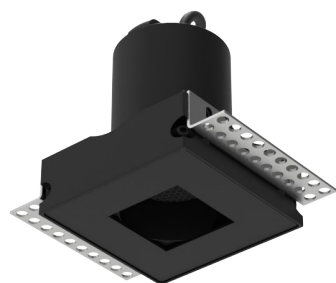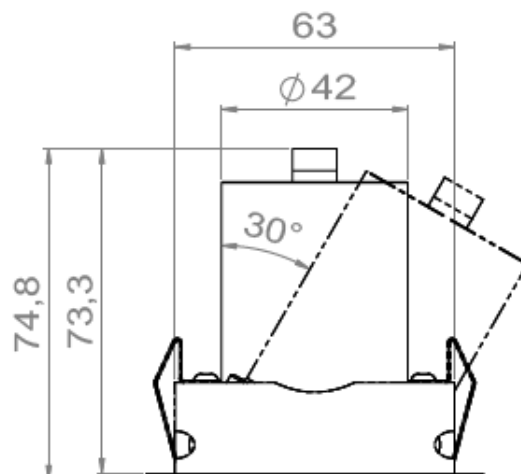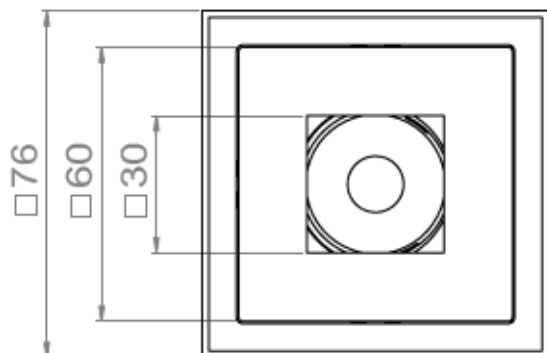

## LEVANA C60 TRIMLESS

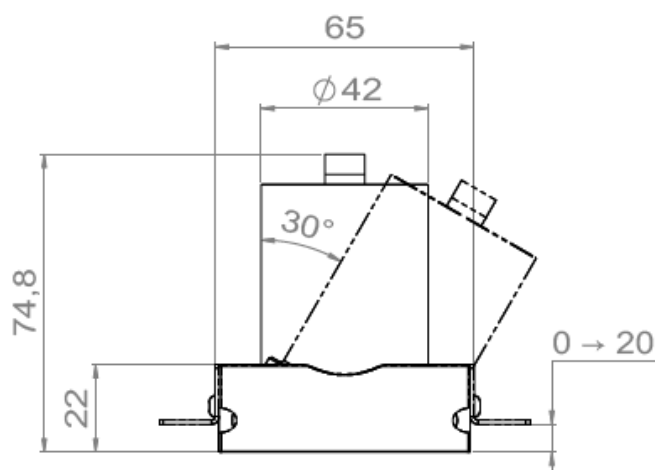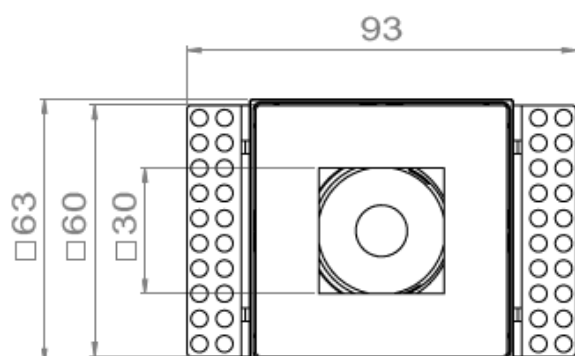

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Louss

Last update: 2025.10.14

Firalux & LOuss brands




SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
www.louss.fr  
Best group



Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE



## LEVANA C75 TRIM

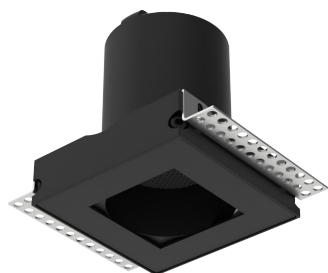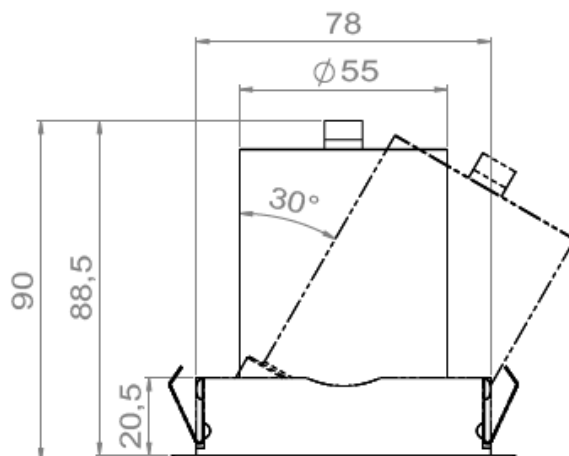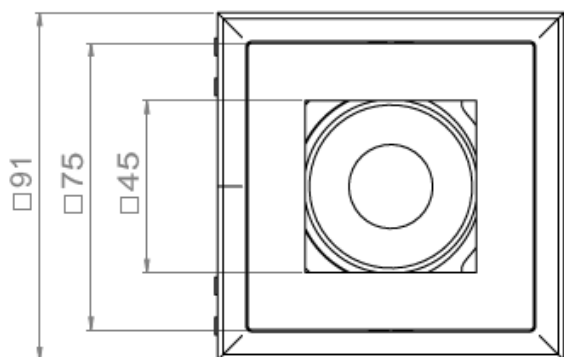

## LEVANA C75 TRIMLESS

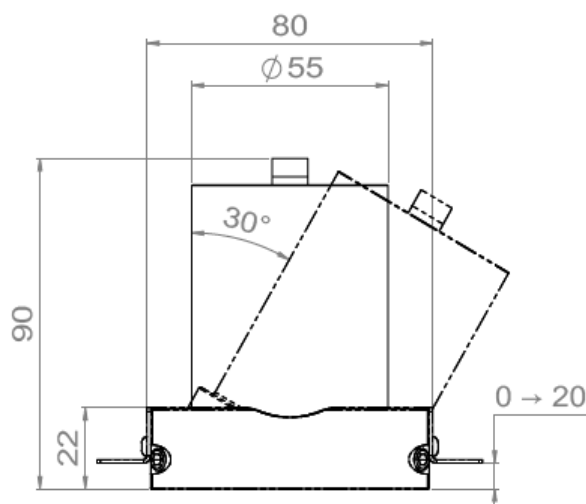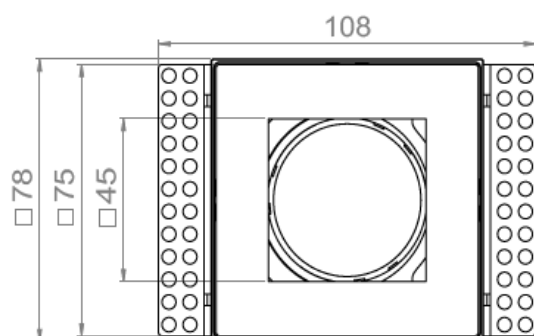

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

**Wouss**

Last update: 2025.10.14

*Firalux & LOuss brands*



SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best group



Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE



## LEVANA D70 TRIM

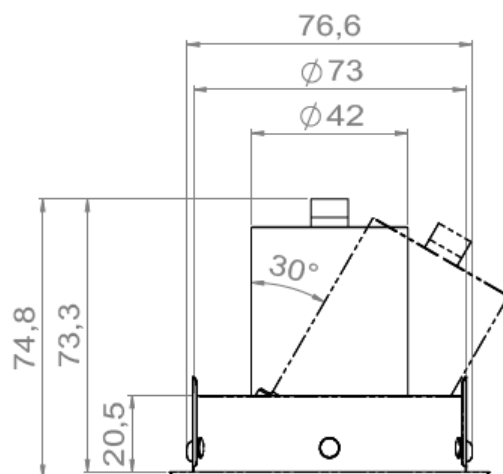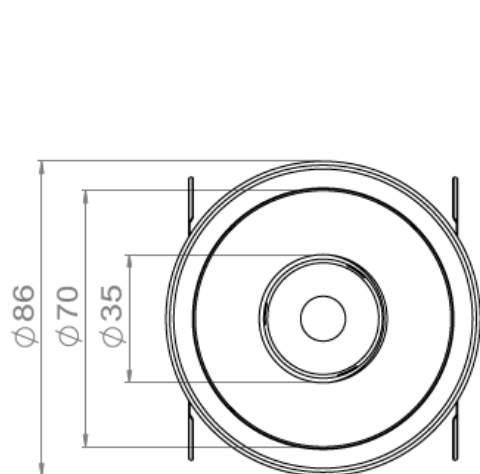

## LEVANA D70 TRIMLESS

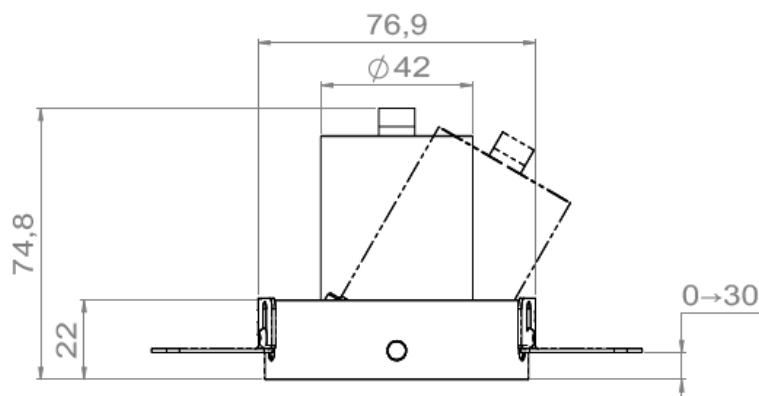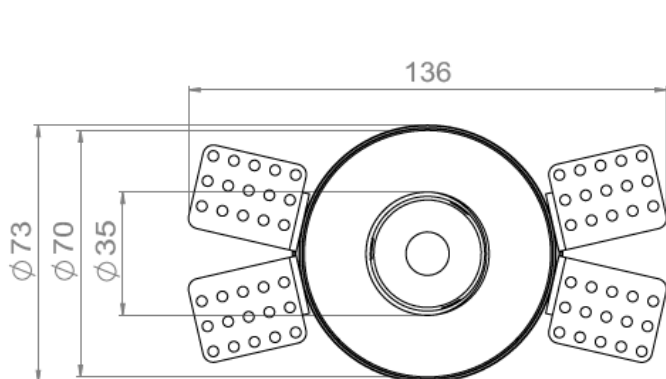

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

**Wouss**

Last update: 2025.10.14

Firalux & LOuss brands




SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best group



Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE



## LEVANA D85 TRIM

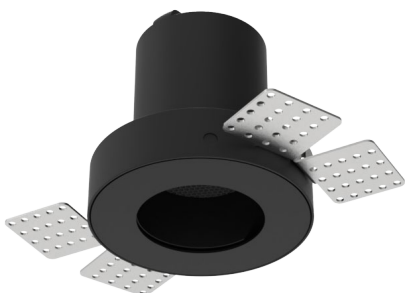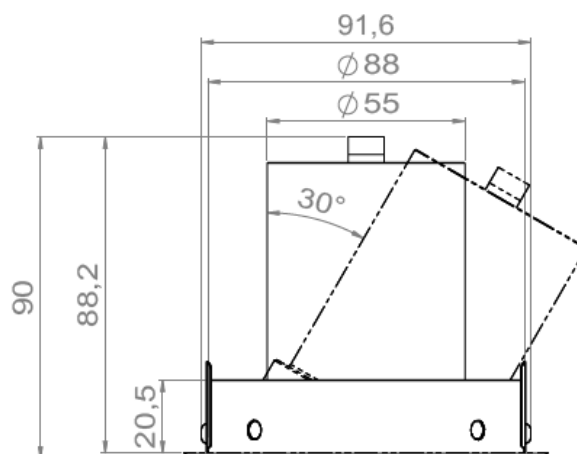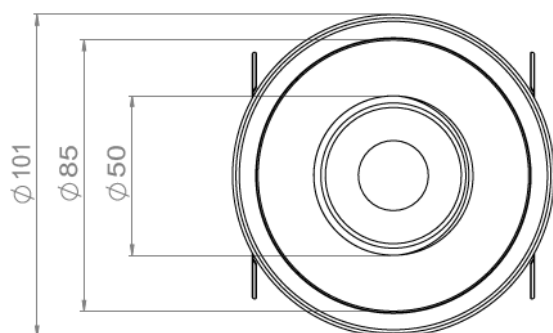

## LEVANA D85 TRIMLESS

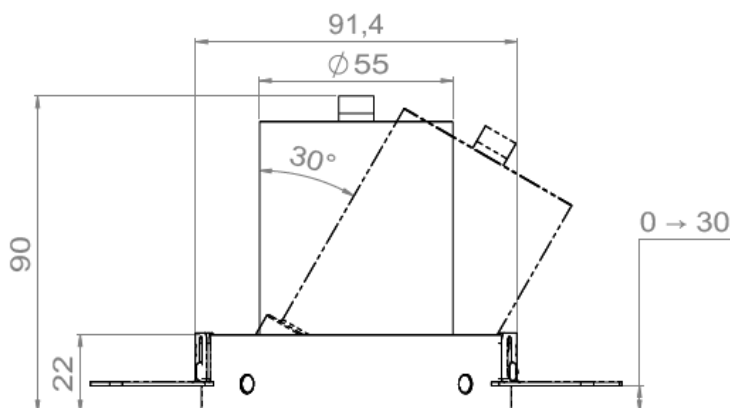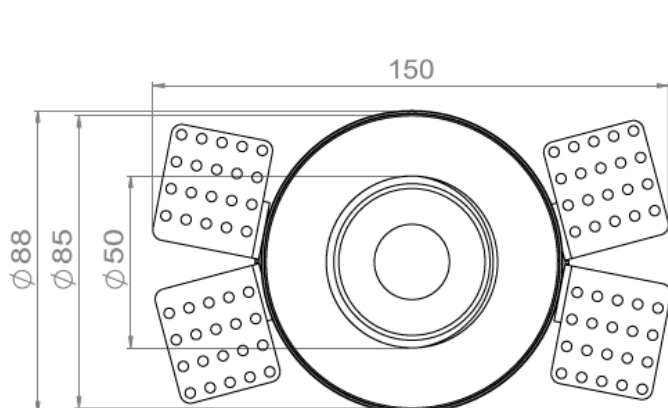

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

Louss


Last update: 2025.10.14

Firalux & LOuss brands

SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z


Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best group

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE

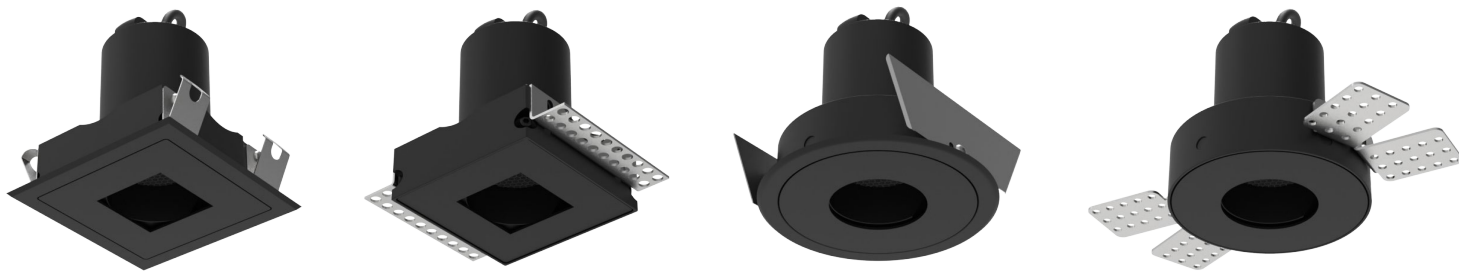

LEVANA • C60 & C75 Trim • C60 & C75 Trimless • D70 & D85 Trim • D70 & D85 Trimless


## LOUSS **Permuto** - Easy Swap system

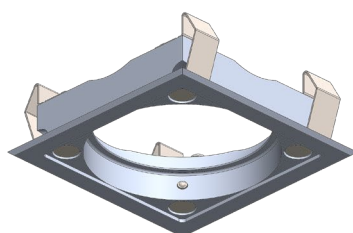


Square or round recessed frame  
according to version



LED / COB




Optics



Accessories (filters, honeycomb grid...)



Spotlight body

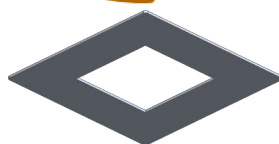

Square or round decorative  
metal plate according to version

All the modifications and connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged

LOUSS

Last update: 2025.10.14

*Firalux & LOUSS brands*

SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best group

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE