




LYNE

Waterproof and compact linear LED light

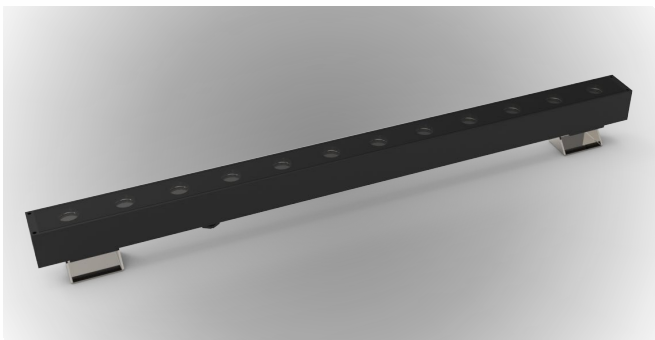

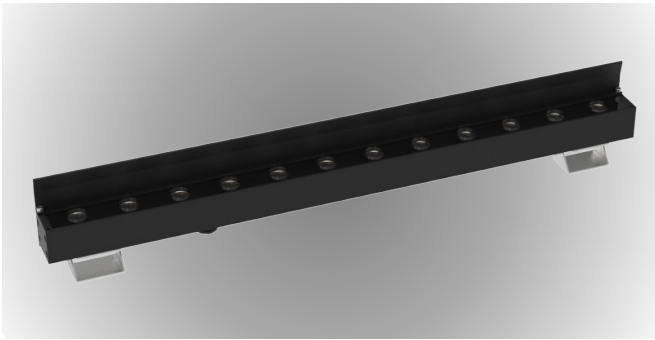


Range	Linear LED light	
Description	Black aluminium body and end caps (other colour upon request) Supplied with or without deflector Stainless steel fixing brackets Glass diffuser	
Dimensions	Length : 262mm, 508mm, 754mm or 1000mm Width : 32mm Height : 30mm (61.5mm with deflector)	
Net weight	1.64kg (1000mm)	
LED characteristics	2700K – 3000K – 3500K – 4000K – 5000K CRI80 or 90 (95 upon request) 3 MacAdam steps	262mm : 6 LED 508mm : 12 LED 754mm : 18 LED 1000mm : 24 LED
Optics	Wall-washer	
Connection	Daisy-chain version : 15cm cable IN + OUT with IP65 connectors Dimming version : 1m cable and IP65 connector	
Power supply	Daisy-chain version : 10max on one 24V remote constant voltage driver Controlable version : 350mA remote constant current driver (DALI, 0-10V, DMX...)	
Power	262mm : 6 LED – 6W 508mm : 12 LED – 12W 754mm : 18 LED – 18W 1000mm : 24 LED – 24W	
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use	
Warranty	Life span: L80-B10 = 35,000 hours (80% remaining flux) at 30°C ambient temperature The warranty applies to components and fabrication supplied by Louss The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and receive a functional burn-in	


All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged







LYNE

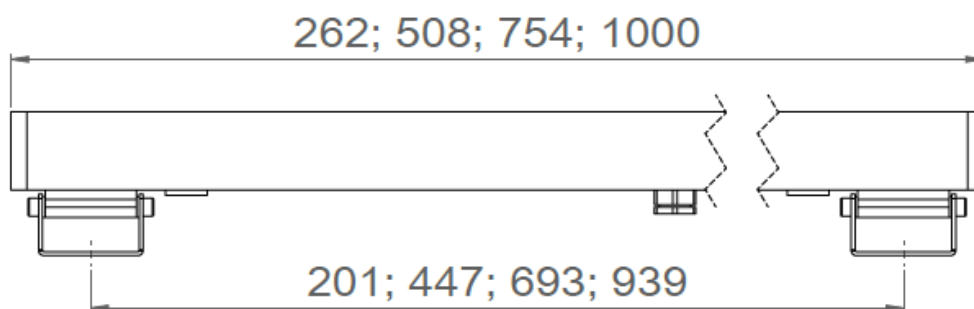

With deflector

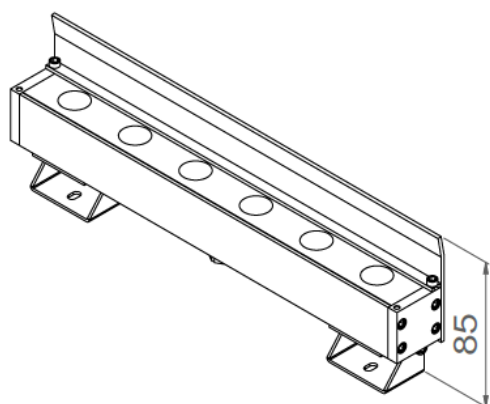

Without deflector

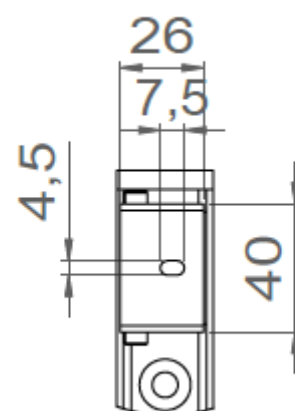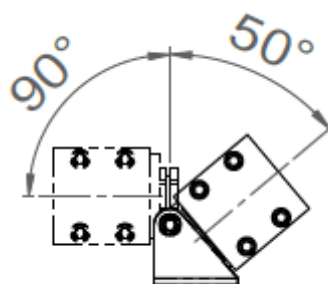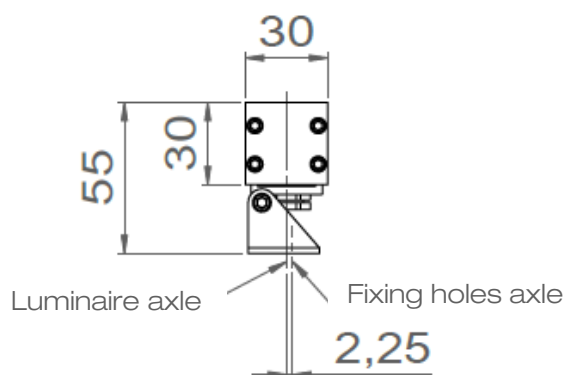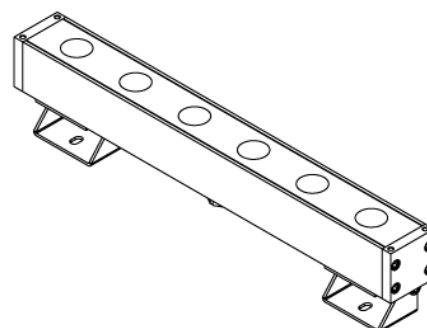

Fixing bracket

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Louss

Last update : 2025/06/10

3/3

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE