





LYNE

*Waterproof & compact
linear LED light*

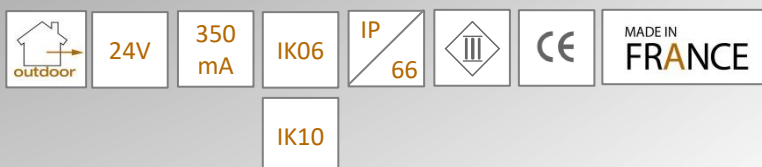

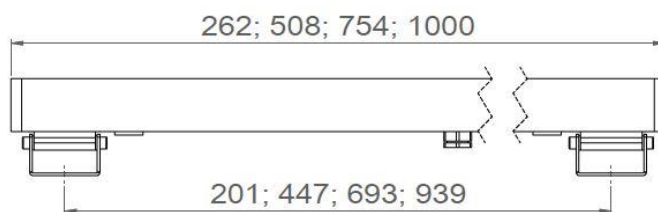

LYNE

Range	Linear LED light	
Description	Charcoal grey aluminium profile and end-caps (other finishing upon request) Stainless steel brackets. Glass diffuser	
Dimensions	Length : 262mm, 508mm, 754mm or 1000mm Width : 32mm Height : 30mm (61.5mm with diffuser)	
Net Weight	262mm: 0.45 kg - 508mm: 0.85 kg - 754mm: 1.24 kg - 1000mm: 1.64 kg	
LED characteristics	2700K – 3000K – 3500K – 4000K – 5000K CRI 80 or 90 (95 upon request) 3 Mac Adam steps	262mm : 6 LED 508mm : 12 LED 754mm : 18 LED 1000mm : 24 LED
Optical beam	Wall washer	
Connection	Delivered with 1m cable (more length upon request) Connection in series on external constant current driver	
Separate power supply	24VCC: chained in series version, 10m maximum (without control or dimming system) Control/dimming version: Individual external driver 350mA (DALI, 0-10V, DMX...)	
Power consumption	262mm: 6 LED - 6W - 508mm: 12 LED - 12W 754mm: 18 LED - 18W - 1000mm: 24 LED - 24W	
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (T_a) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.	
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.	

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

LOuss

Last update : 20/09/2021

Firalux & LOuss brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel.: +33 380 48 65 68
contact@louss.fr
www.louss.fr

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE








Dimensional drawing

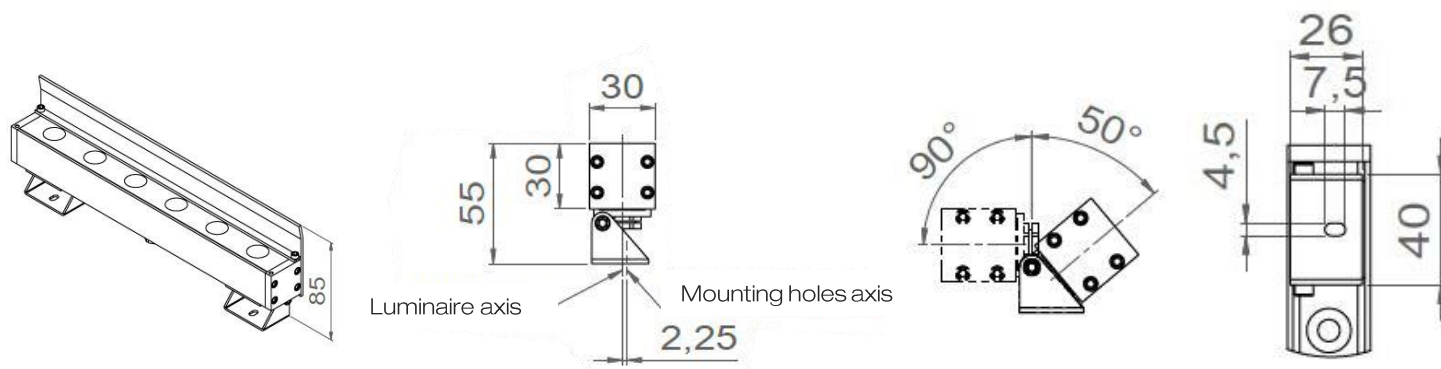

Fixing brackets

Installation principle

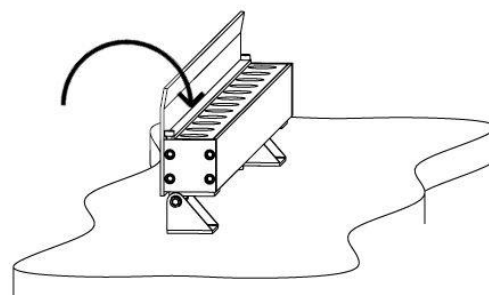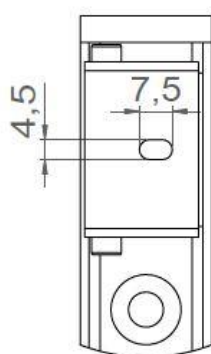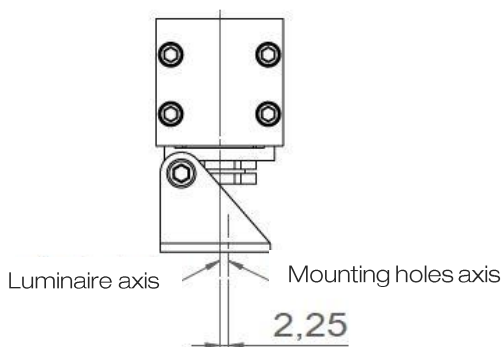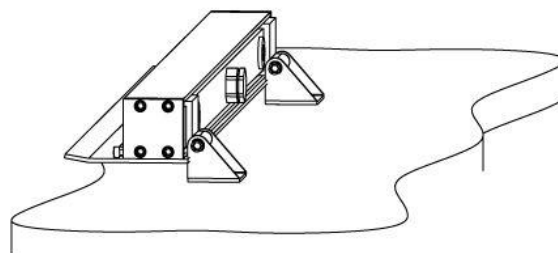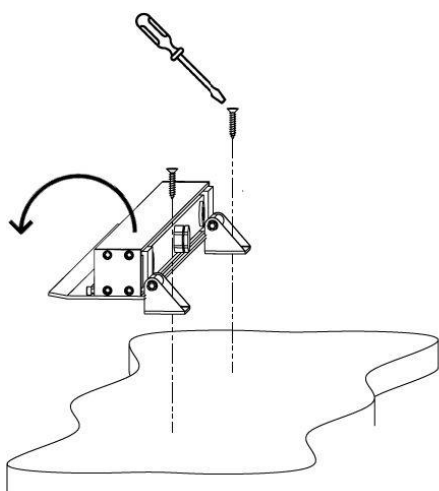

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.