

LOUSS



Lighting Emotion



MAGMATO 80

*The recessed architectural
floodlighting Medium*



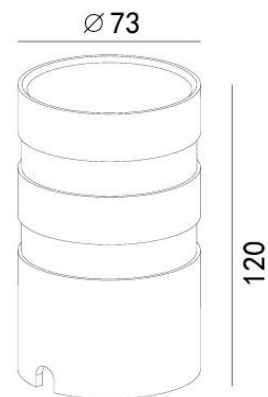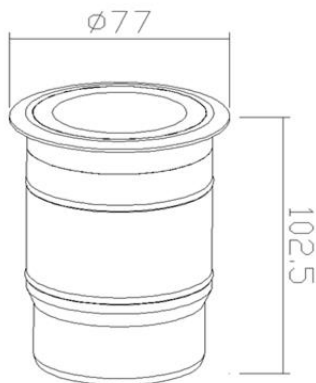

MAGMATO 80

Range	Recessed architectural floodlighting
Description	Body in aluminium, head in stainless steel Armoured glass Dedicated recessed box
Dimensions	Luminaire: External diameter: 77 mm - Length : 103 mm Recessed box: Diameter: 73mm - Length: 120mm
LED characteristics	1 LED: 2700K – 3000K – 3500K – 4000K – 5000K (other upon request) CRI 80 – 90 - 95
Optical beam	4° - 6° - 15° - 30° - 40° - 25x50° elliptical – Wall Washer (other upon request)
Connection	Delivered with 1m standard cable(more length upon request)
Integrated driver	24V
LED power	7W
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

LOuss

Last update : 04/02/2019

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE