Firalux
Lighting Emotion

# MINIFILED STAIRS

indoor | IP20 | Ta 30° | III | CE | made in FRANCE

# MINIFILED STAIRS

| | |
|---|---|
| **Range** | Recessed spotlight for accent lighting |
| **Description** | Anodized aluminium body<br>Supplied with a low luminance tube & a mounting frame |
| **Finish** | Velvet-looking black matt finish |
| **Dimensions** | Installation diameter : 55mm<br>Plate dimensions : 80 x 64mm<br>Length : 38.5 to 38.8mm according to version (frame included) |
| **Spotlight weight** | ± 0.025 kg |
| **LED characteristics** | 1 or 2 LED : 2700K - 3000K - 3500K - 4000K (other upon request)<br>Or combination of colour temperatures upon customer's request<br>MacAdam ellipse: 3 SDCM<br>CRI: 90 |
| **Optical beam** | 8° - 14° - 21° - 26° - 30° - 40° |
| **Luminous flux** | 1 LED : 80 lumen<br>2 LEDs : 160 lumen |
| **Connection** | Delivered alone or with easy plug system for daisy chain : 110mm or 250mm wires and male + female quick connectors + shunt end of line, for serial connection |
| **Separate power supply** | 700mA max remote constant current driver<br>For the US & Canada, use a UL class 2 driver |
| **LED power** | 1 LED : 1W<br>2 LEDs : 2W |
| **Use limitations**  | The product must be installed into a ventilated area<br>This product must not be covered by insulating material<br>Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees<br>The drivers, if not delivered by LOuss, must be approved before use |
| **Warranty** | Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature<br>3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product<br>All products are electrically tested and received a functional burn-in |

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.



BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

# MINIFILED STAIRS

## Installation from below with mounting frame







Angle 15°




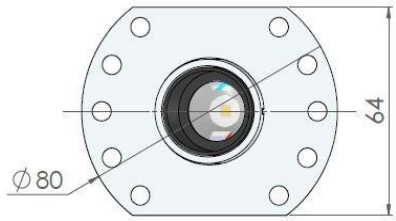


Angle : 75° + 61°

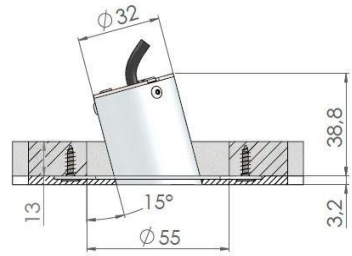Other angles upon request

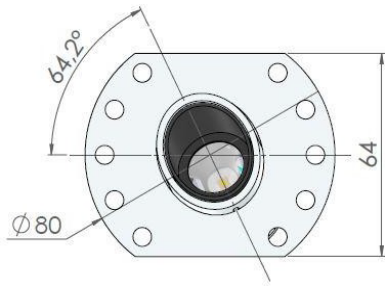


All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.




BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOuss

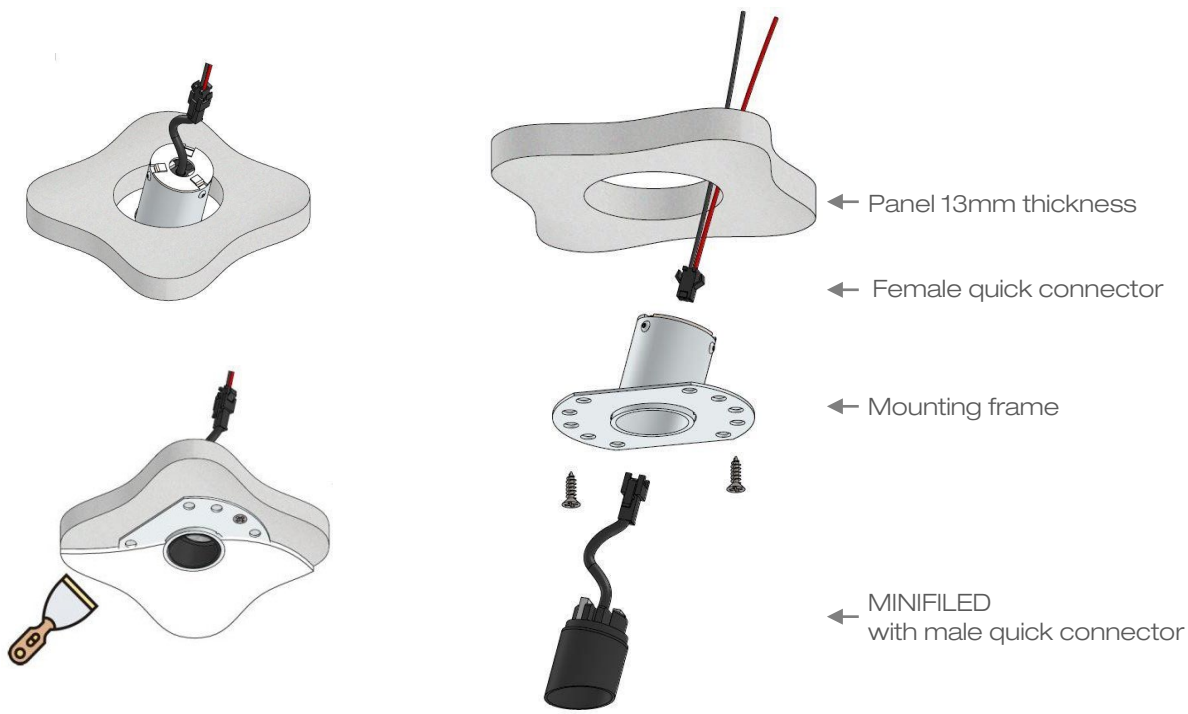Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE