

Wouss

Lighting Emotion



MiniTrack Micro Simple • LL




MiniTrack Aurore D22



MiniTrack V25





MiniTrack UNDO Simple • LL



MINITRACK

The multipurpose mini track




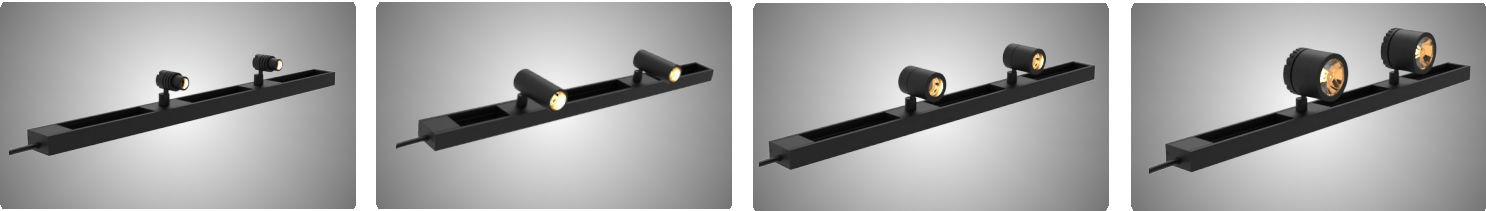

MINITRACK • MICRO • AURORE D22 • V25 • UNDO

Range	Luminaires on track for ambient or accent lighting		
Description	Track 4 conductors 5A max - 24V - 120W max. + 2 PWM channels Tracks dimensions : - Width : 29mm - Height : 16mm - Length : 100mm to 2500mm according to version Plug-in module length : 50mm 500mm cable 3 possibilities of fixing devices : magnets, adhesive tape, screws Equipped with MICRO, AURORE D22, V25, UNDO spotlights, or a combination of any of these luminaires with a maximum of 1 kg of luminaires per meter of track		
Finish	Black anodized matt finish Natural anodized (other upon request)		
LED spot dimensions	MICRO		AURORE D22
	Diameter : 17mm Length : 18mm (Simple) 24.5mm (Low Luminance)		Diameter : 22mm Length : 50mm
	V25		UNDO
	Diameter : 25mm Length : 37mm		Diameter : 39.50mm Length : 37.10mm (Simple) 40.40mm (Simple + accessories) 52.10mm (Low Luminance (L.L)) 55.40mm (L.L + accessories)
LED characteristics	2200K - 2700K – 3000K – 3500K - 4000K (other upon request) CRI 90 – 95 R9>80		
	MICRO		AURORE D22
	16° - 20° - 40° - 65° - 17°x49°		10° - 15° - 20° - 25° - 40° - Elliptical
	V25		UNDO
	CRI 92	10° - 12° - 18° - 24° - 36° - 40° - 54° - 60° - Elliptical Caution: The luminous border is poorly defined with 10° or 12° optics	3° - 6° - 11° - 17° - 20° - 25° - 30° - 40° - 60° Asymetrical
	CRI 95	15° - 17° - 25° - 31° - 36° - 40° - 57° - Elliptical	

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

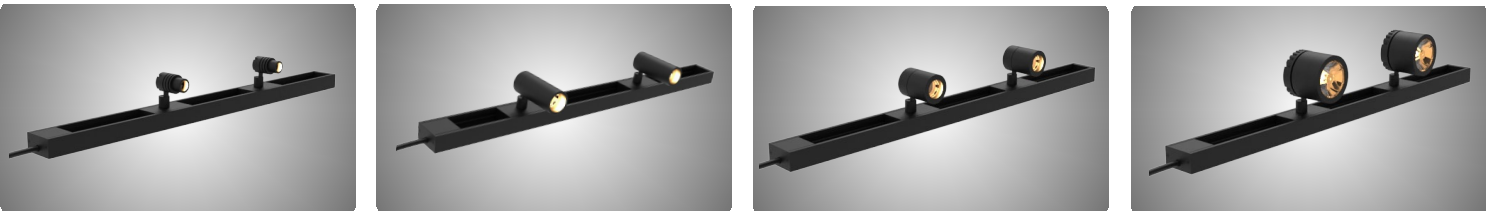

MINITRACK • MICRO • AURORE D22 • V25 • UNDO

Accesories	Filters, honeycomb grid upon request	
LED Power	MICRO	AURORE D22
	1.70W max.	1.70W max.
	V25	UNDO
	2.70W max.	8W max.
Separate power supply	24V remote constant current driver with PWM (2 channels) For the US & Canada, use UL class 2 driver	
Electrical class	III	
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use Indoor lighting IP rating : 20	
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in	

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOuss


Last update : 2025.07.08

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z



Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

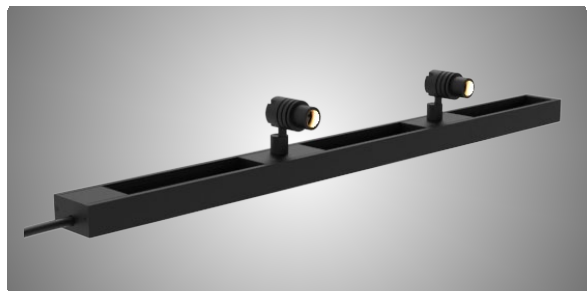

MINITRACK MICRO

Simple version

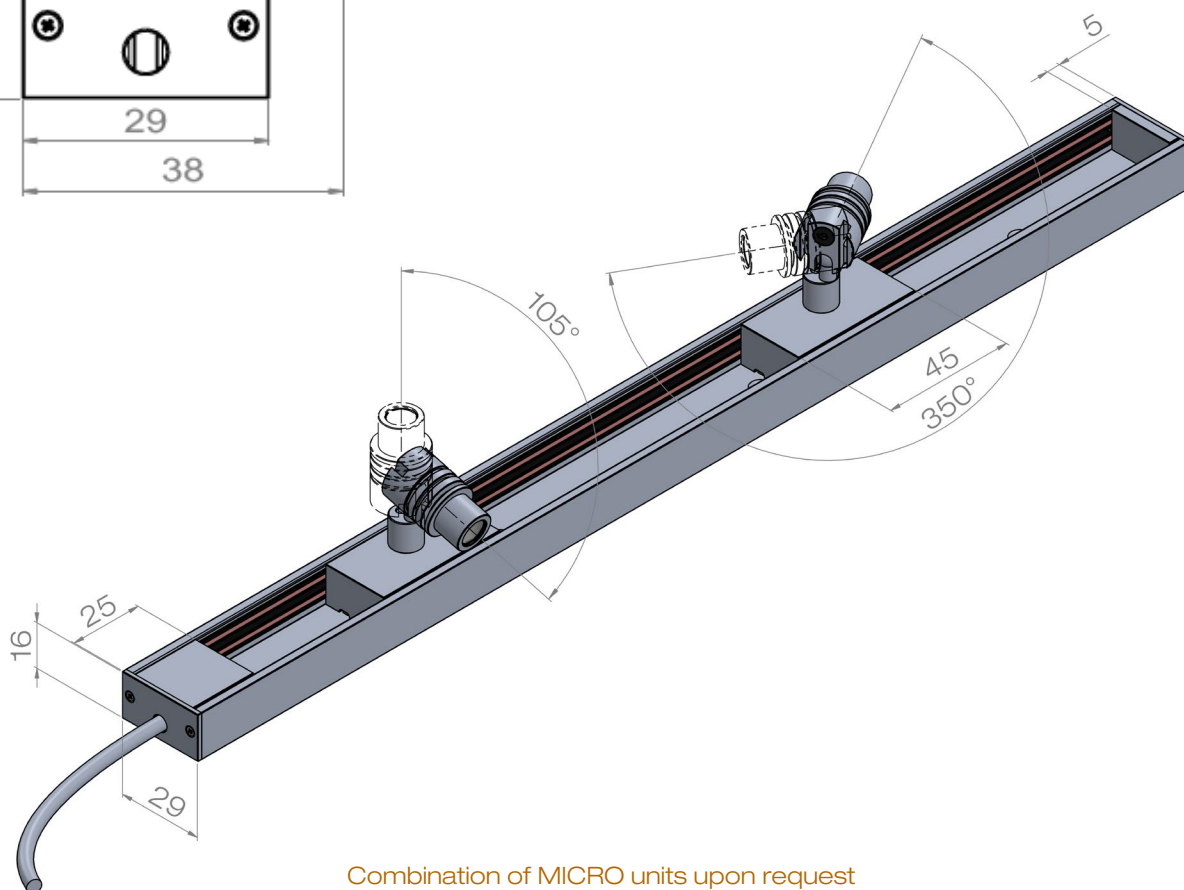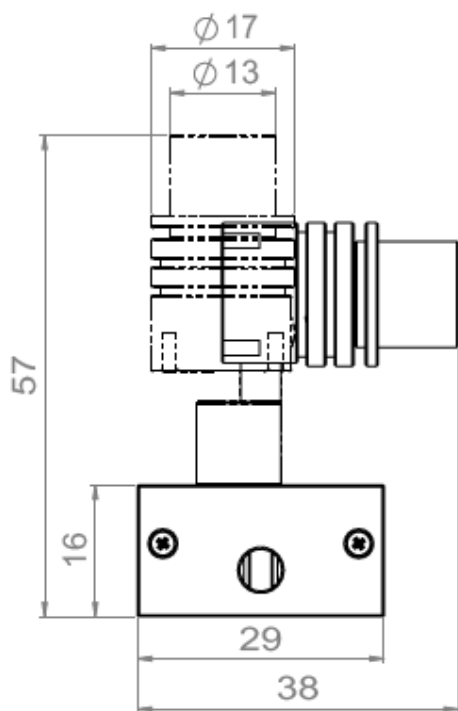

Combination of MICRO units upon request
Up to 120W on 2500mm max. 24V track

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Wouss

Last update : 2025.07.08


4/15

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z



Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

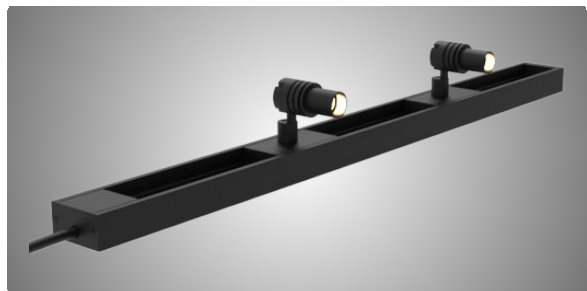

MINITRACK MICRO

Low Luminance version

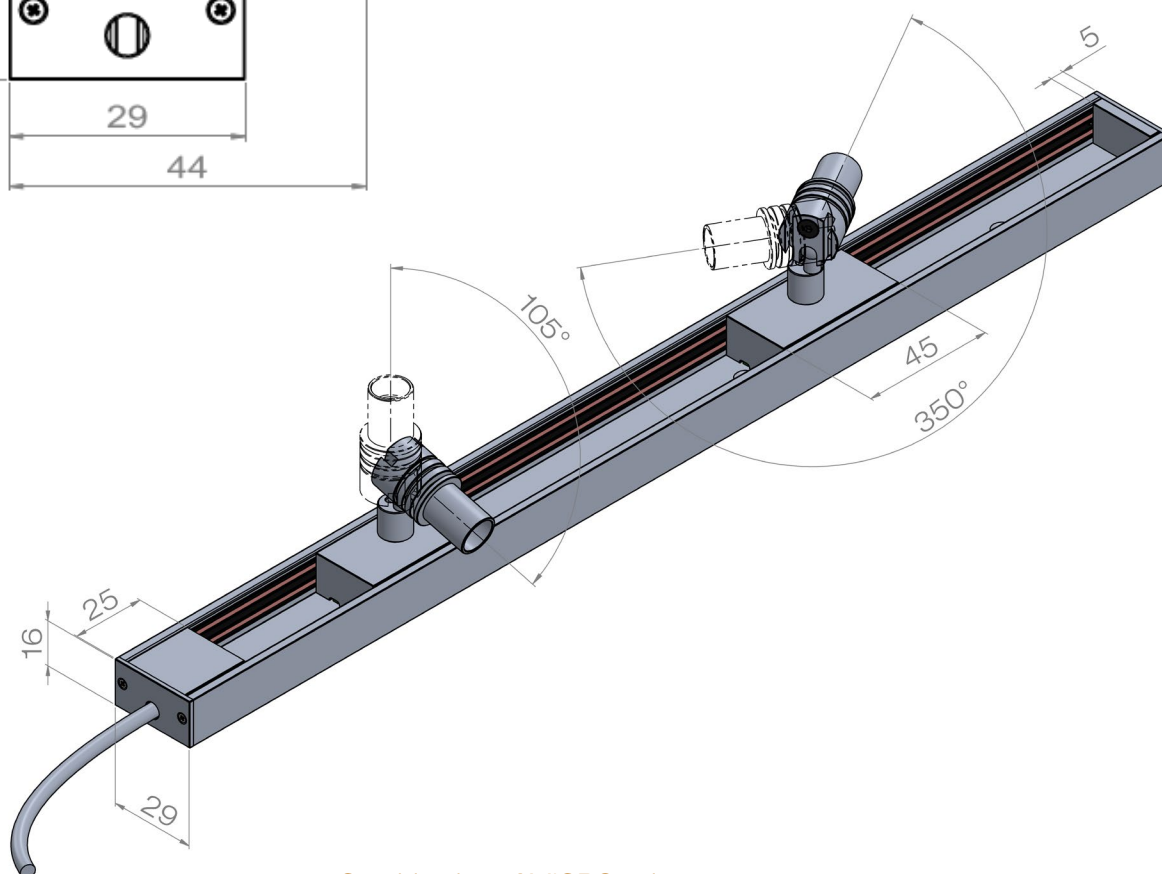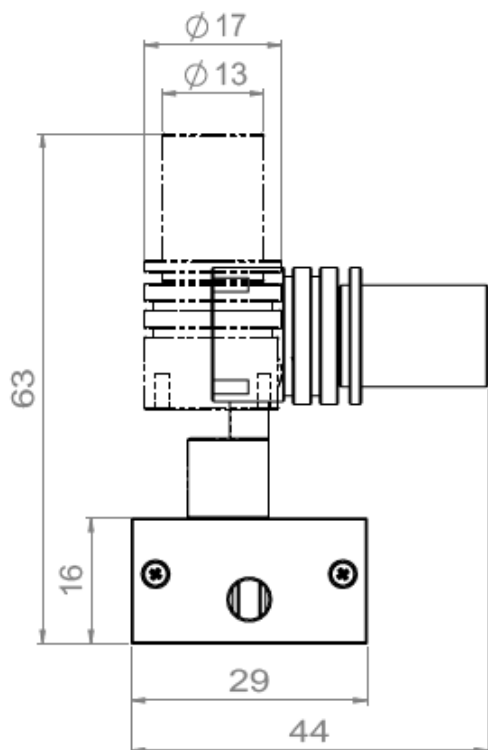

Combination of MICRO units upon request
Up to 120W on 2500mm max. 24V track

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Last update : 2025.07.08

5/15

Firalux & LOuss brands

LOuss


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



MINITRACK AURORE D22

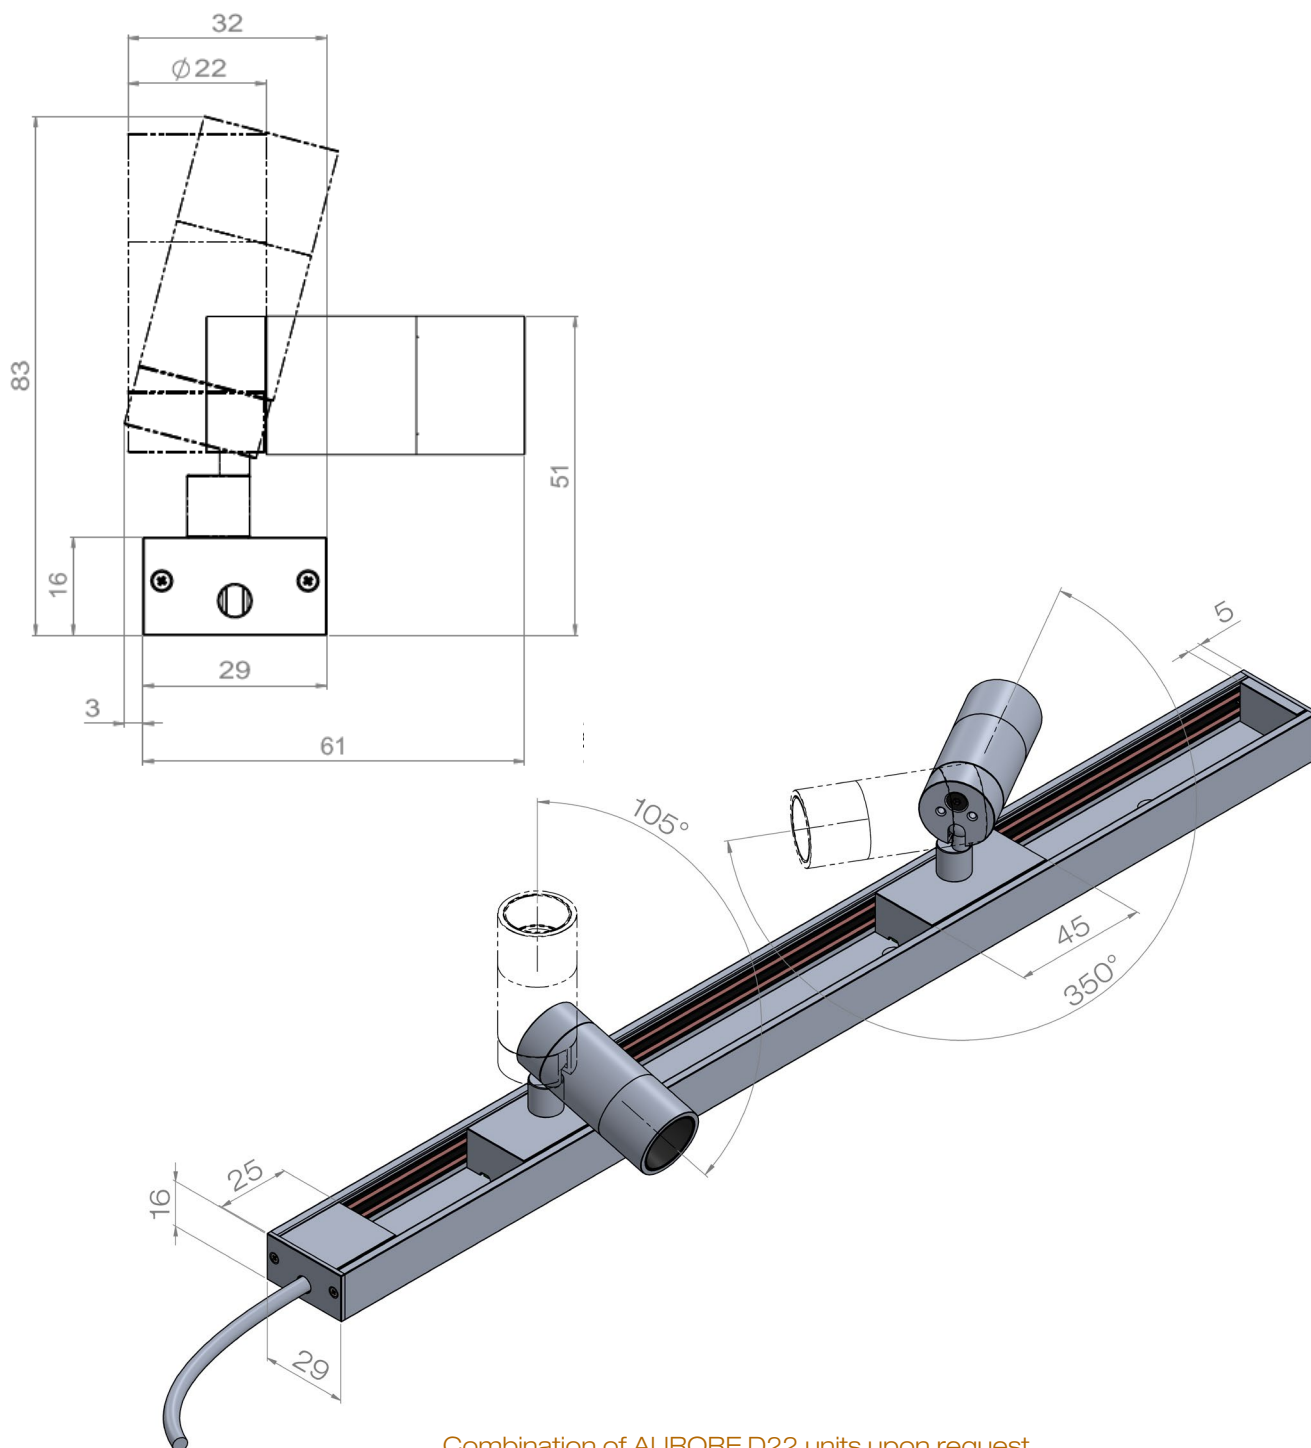

Combination of AURORE D22 units upon request
Up to 120W on 2500mm max. 24V track

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

lOuss

Last update : 2025.07.08

Firalux & LOuss brands



SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



MINITRACK V25

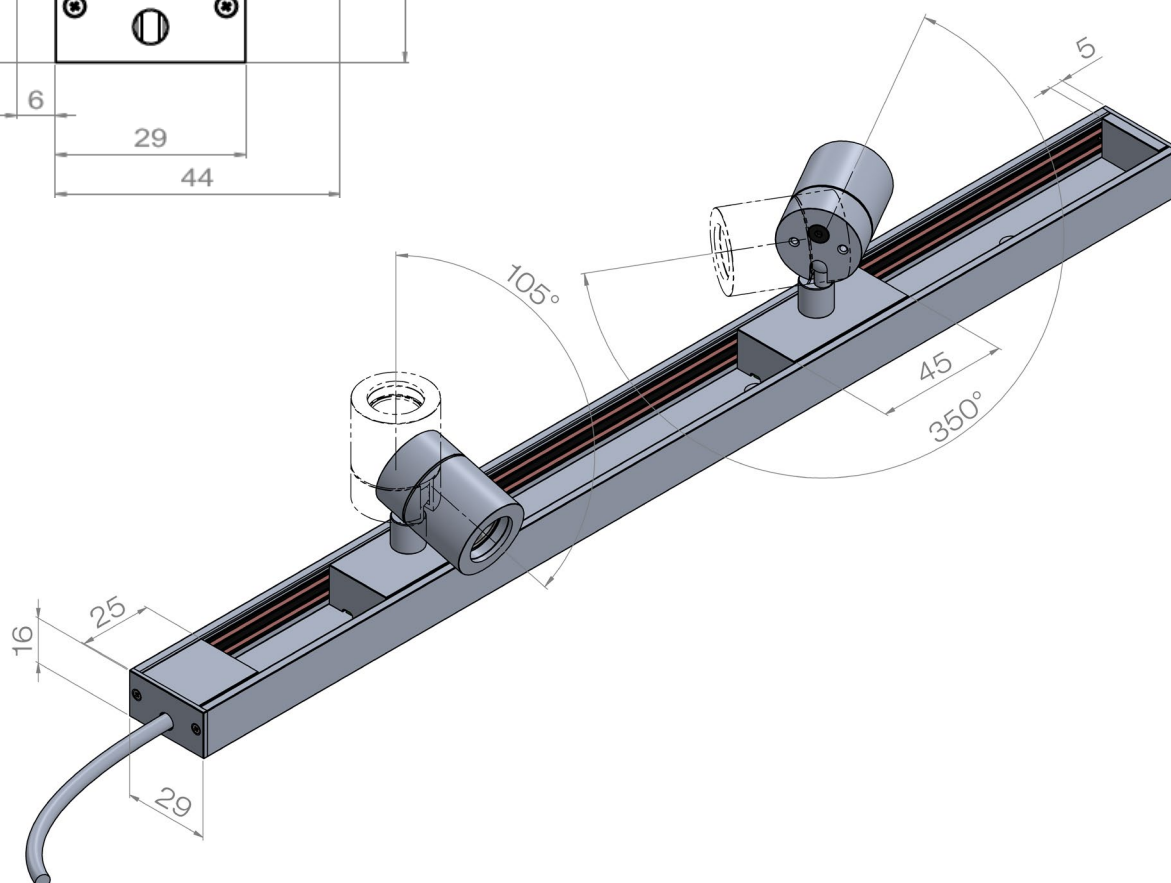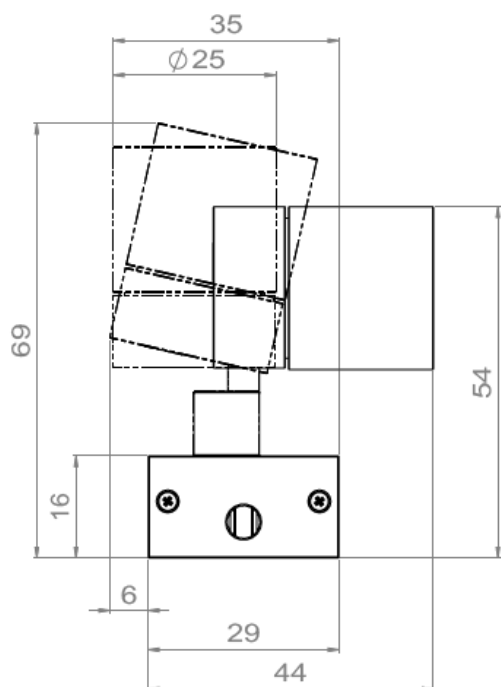

Combination of V25 units upon request
Up to 120W on 2500mm max. 24V track

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

lOuss

Last update : 2025.07.08

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





MINITRACK UNDO

Simple version

Without accessories

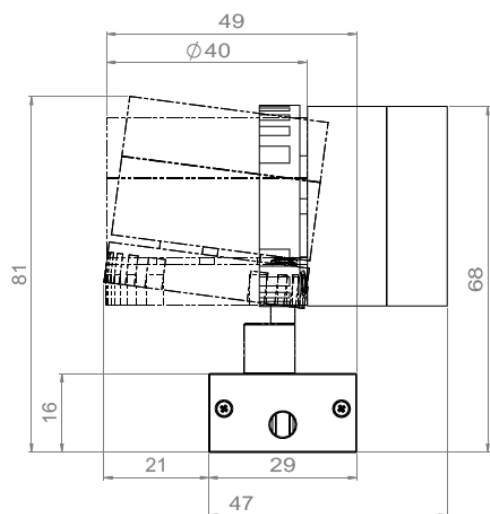

With accessories

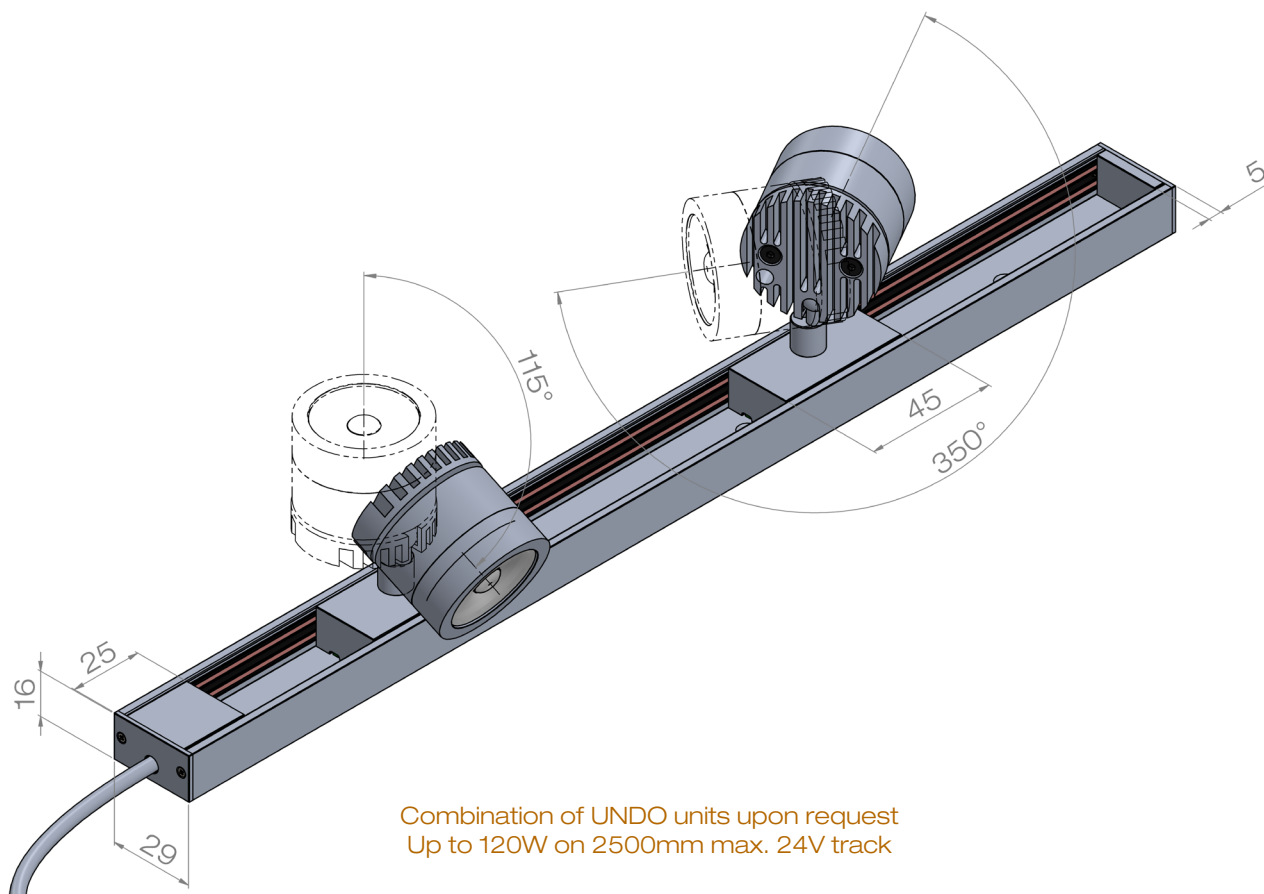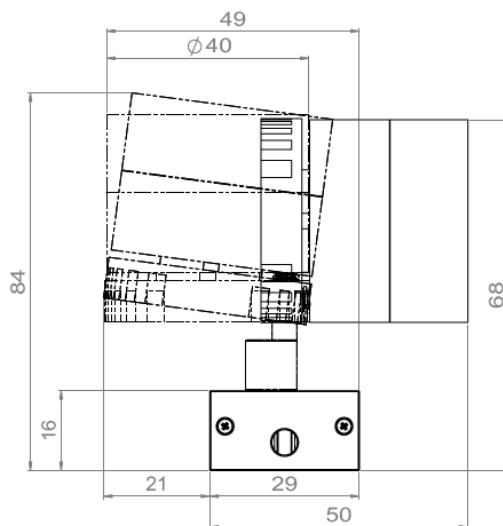

Combination of UNDO units upon request
Up to 120W on 2500mm max. 24V track

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Wouss

Last update : 2025.07.08

8/15

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





MINITRACK UNDO

Low Luminance version

Without accessories

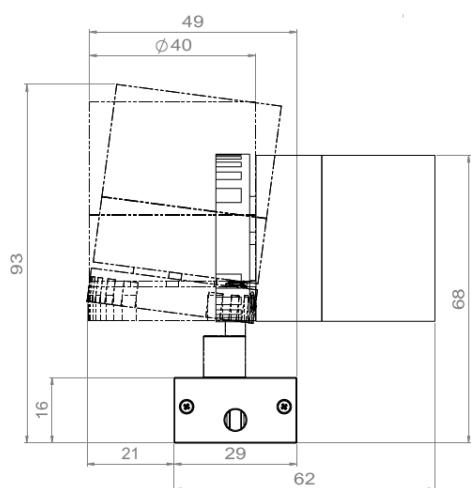

With accessories

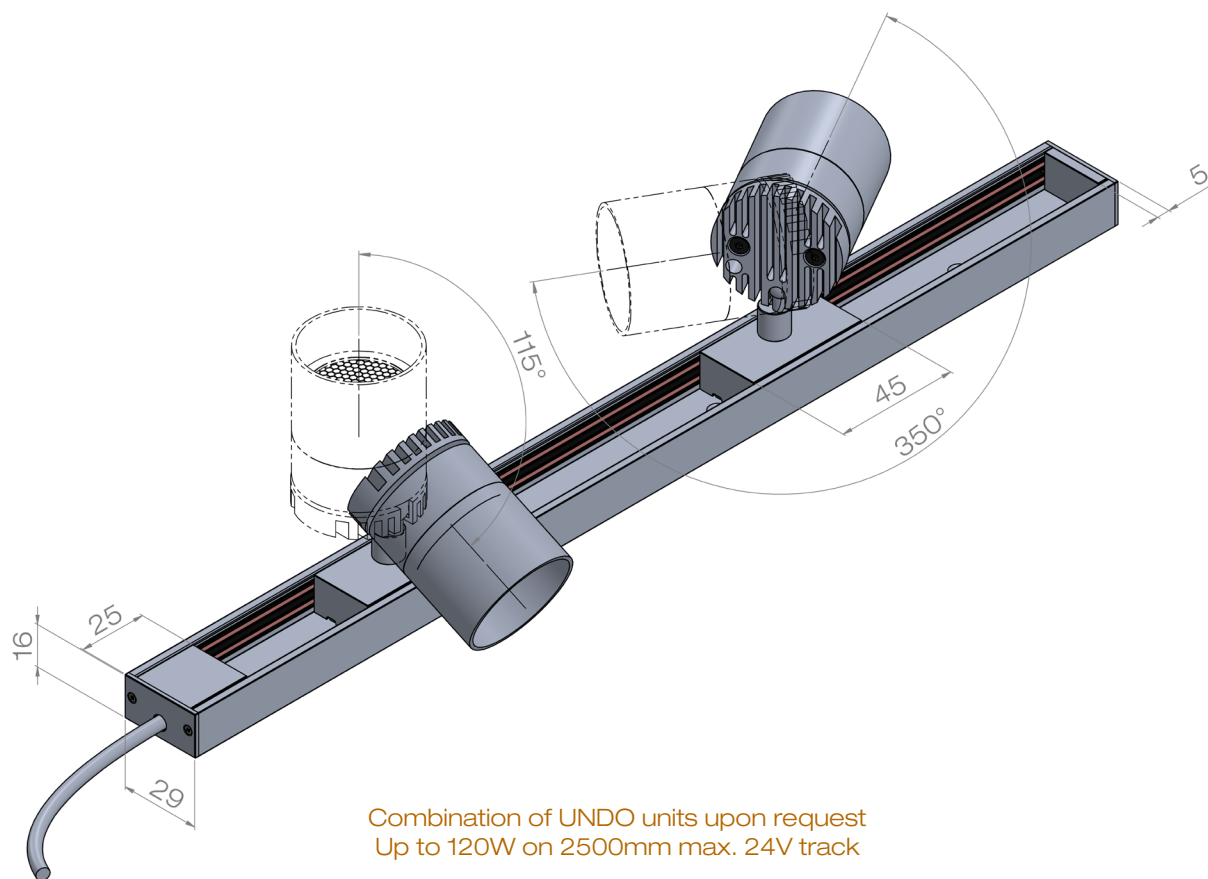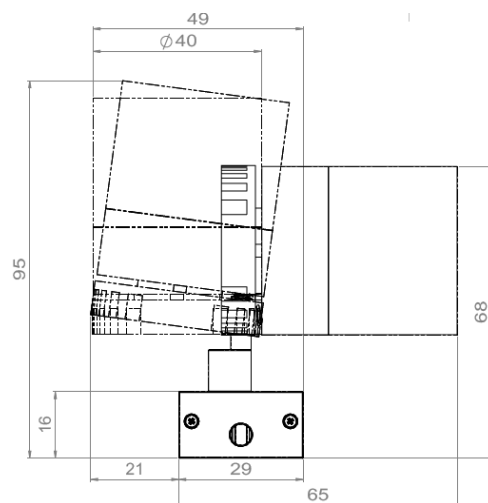

Combination of UNDO units upon request
Up to 120W on 2500mm max. 24V track

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Wouss

Last update : 2025.07.08

9/15

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




MINITRACK

Individual or Daisy-chain connection


Individual Track version

1 MiniTrack - 120W max. per connecting end cap

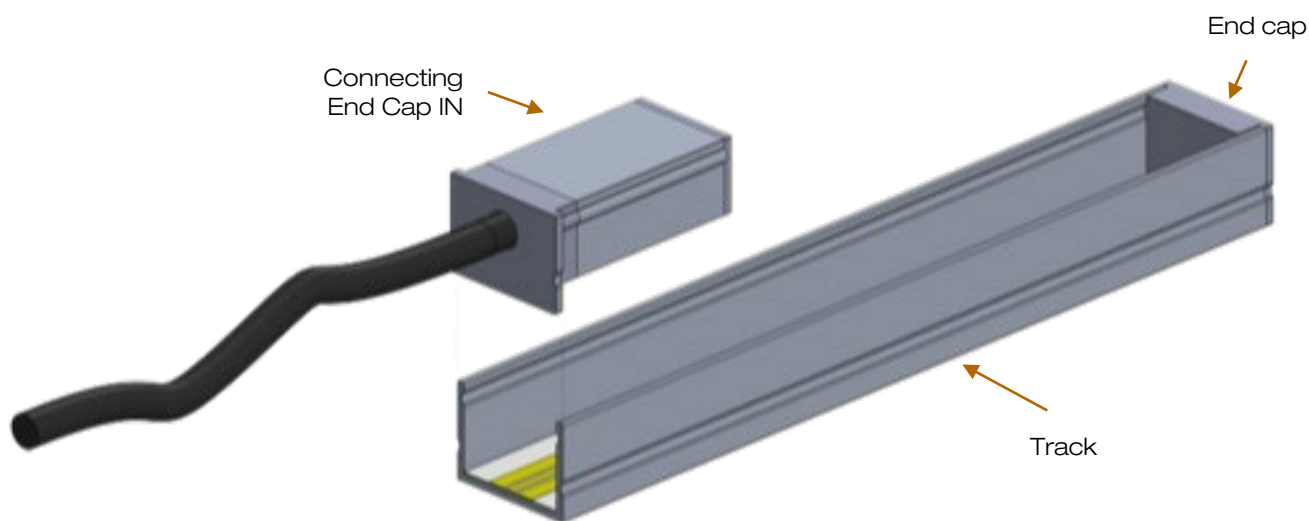

Daisy Chain version

Various chained MiniTracks - Total : 120W max.

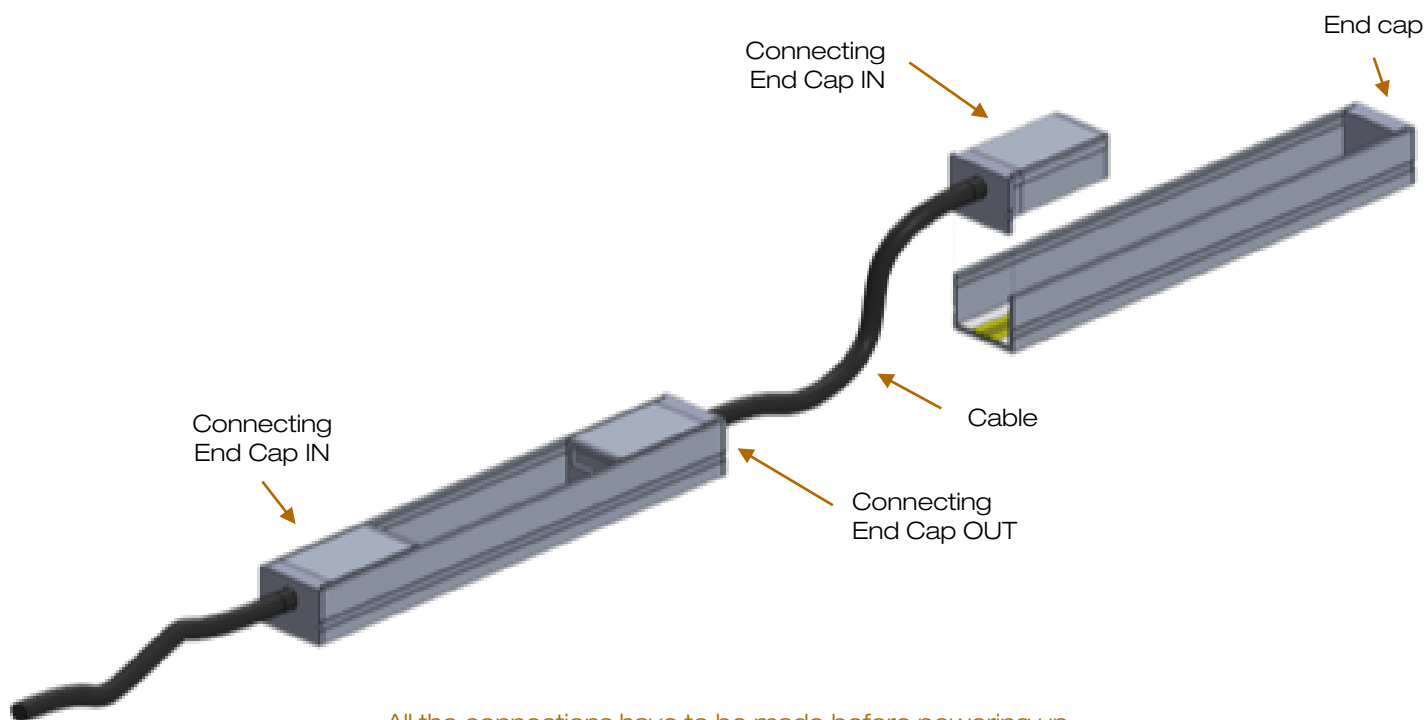

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOUSS

Last update : 2025.07.08

10/15

Firalux & LOUSS brands


SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

1 Install the track according to version


Magnetic version



Track equipped with magnets fixed with adhesive tape
(1 magnet for 100mm)


$Lg \geq 100mm$	= 1 magnet
$Lg \geq 101mm \leq 200mm$	= 2 magnets
[...]	
$Lg \geq 2301mm \leq 2400mm$	= 23 magnets
$Lg \geq 2401mm \leq 2500mm$	= 24 magnets

Adhesive tape version



Track equipped with double-side adhesive tape

Screw version




Track equipped with screws
(1 screw every 500mm track)

Track = 100mm < 1000mm	= 2 screws
Track > 1001mm < 2000mm	= 3 screws
Track > 2001mm < 2500mm	= 4 screws




All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

2 Insert each module into the track

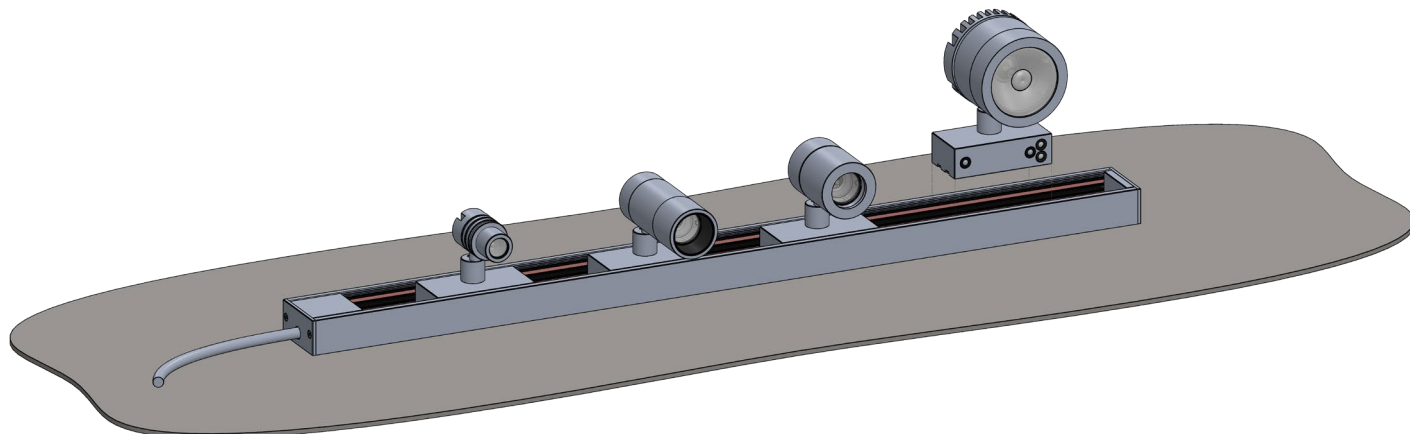

MINITRACK CUSTOM

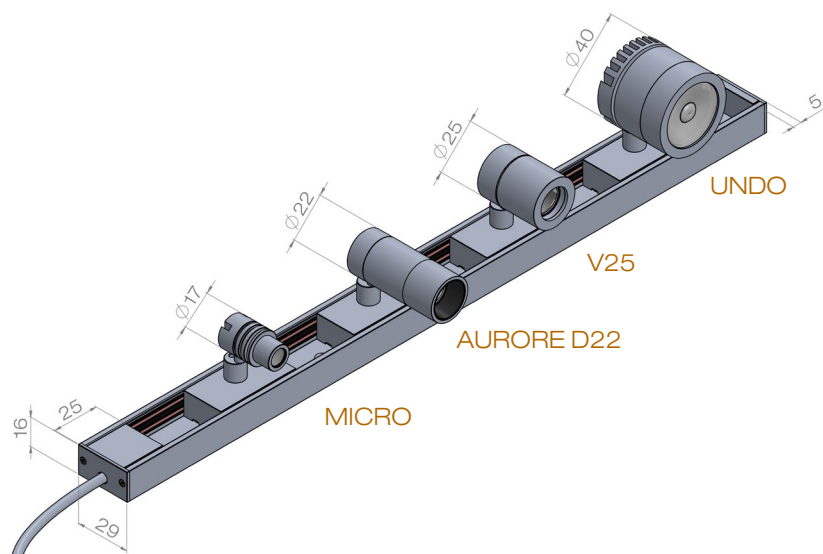


According to customer's request, combination of :

- MICRO Simple or Low Luminance unit(s)
- AURORE D22 unit(s)
- V25 unit(s)
- UNDO Simple or Low Luminance unit(s)

Up to 120W on 2500mm max.
24V track


1 kg of luminaires per meter max.

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

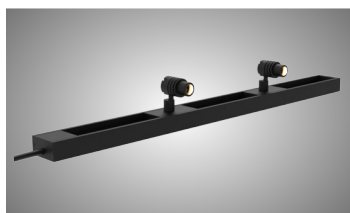

MINITRACK

Wiring system
ON/OFF

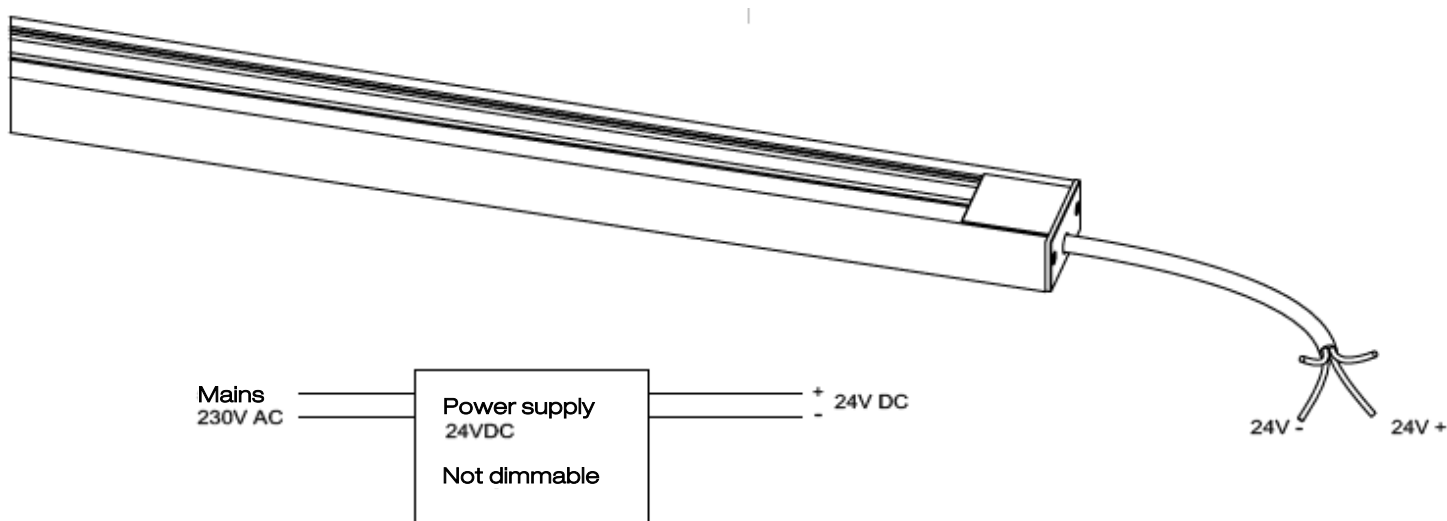

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

LOUSS

Last update : 2025.07.08


13/15

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

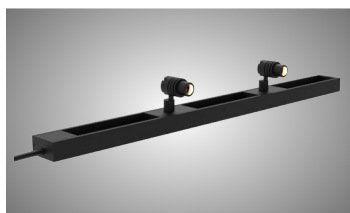

MINITRACK

Wiring system
ON/OFF – Dual circuit switching version

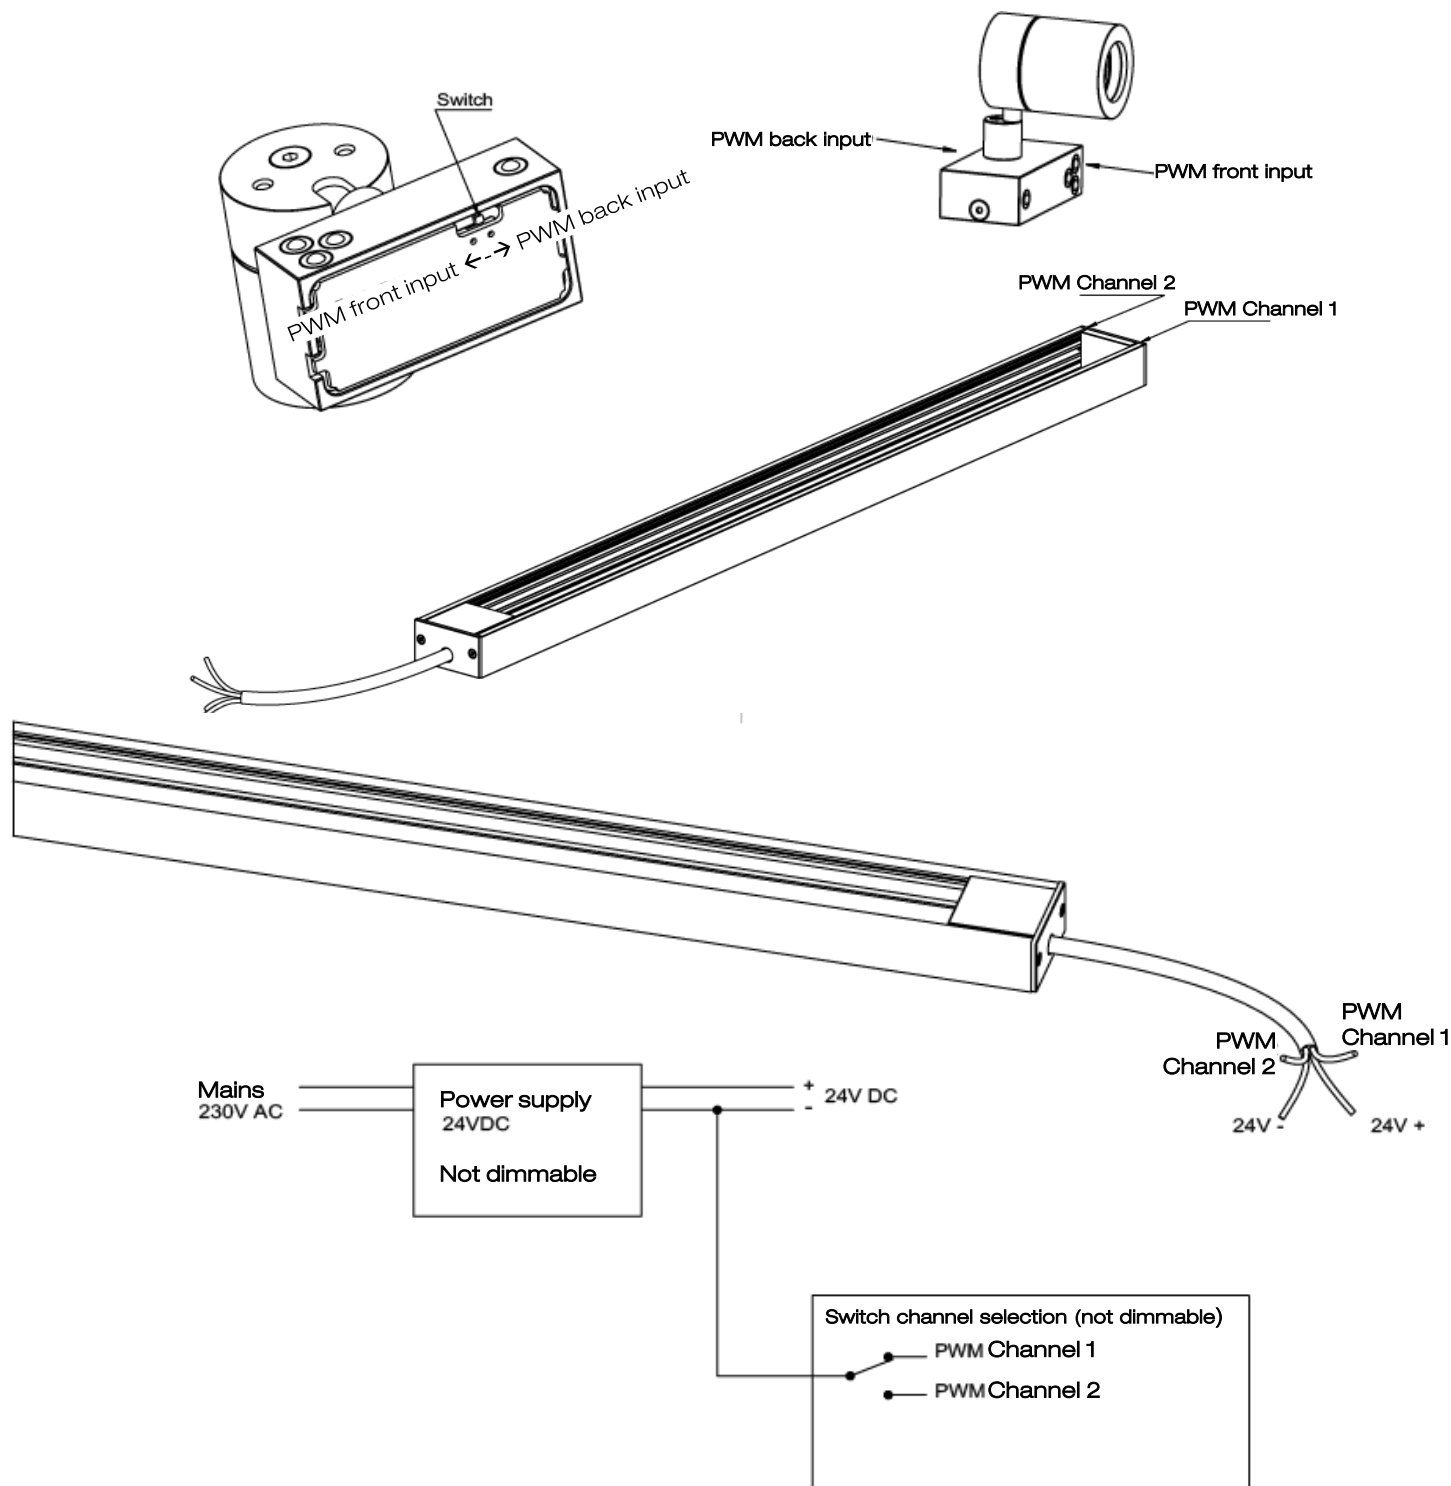

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Louss

Last update : 2025.07.08


14/15

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

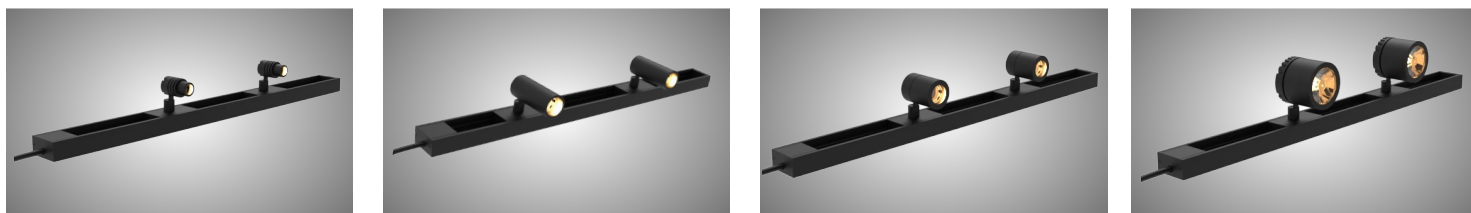

MINITRACK

Wiring system
Dimmable version • PWM

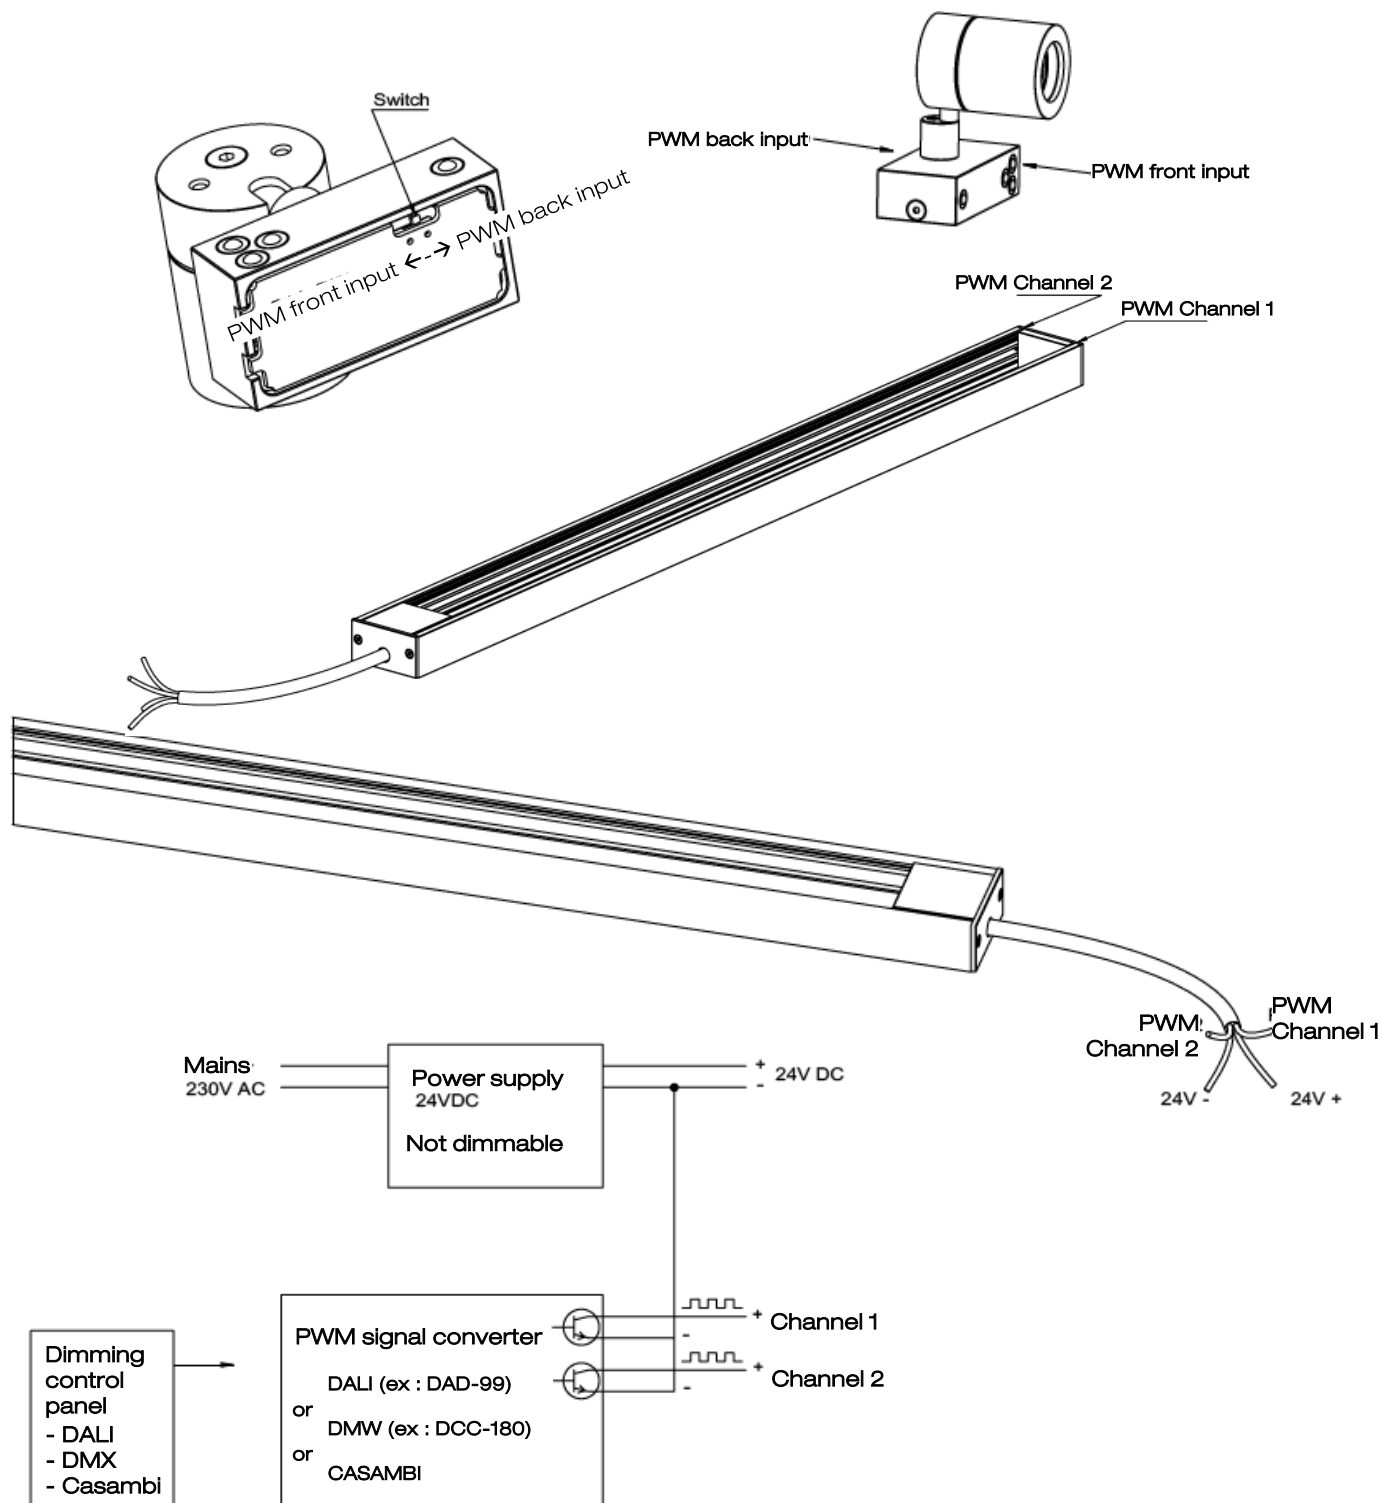

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged

15/15

LOUSS

Last update : 2025.07.08

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE