




## ROLLED GLISS



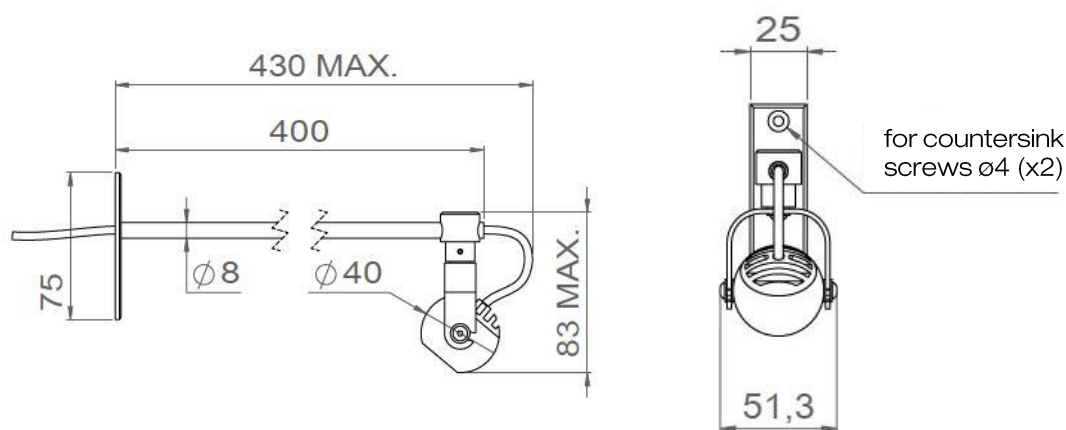

## ROLLED GLISS

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Range</b>                 | LED spotlight for highlighting architectural details                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>           | Projector fixed on rectangular plate<br>Rotating ball on bracket<br>Rod lenght on request<br>Stone hue RAL 1013 matt (other upon request)                                                                                                                                                                                                                                                                                                             |
| <b>External diameter</b>     | 100mm                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>LED characteristics</b>   | 1 LED or 3 LED<br>2700K - 3000K - 4000K - 5000K<br>CRI : 80                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Optical beam</b>          | Intensive – Semi intensive – Extensive - Elliptic                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Connection</b>            | Delivered with 1m cable                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Separate power supply</b> | 700mA max constant current driver                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>LED power</b>             | 1 LED : 1.2W at 350mA - 1.8W at 500mA - 2.4W at 700mA<br>3 LED : 2.4W at 350mA                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Use limitations</b>       | The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees.<br>The drivers, if not delivered by LOuss, must be approved before use.                                                                                                                                        |
| <b>Warranty</b>              | Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature.<br>3-year parts and labour warranty.<br>The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product.<br>All products are electrically tested and received a functional burn-in. |

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged.

LOuss

Last update : 20/04/2021

Firalux & LOuss brands

SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best group

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE