



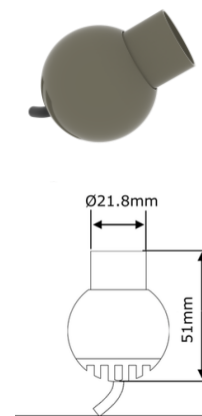

ROLLED SPIKE

*The garden lighting
specialist*

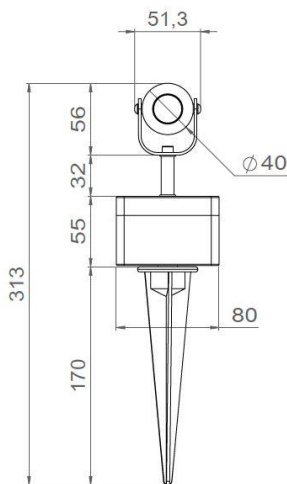

ROLLED SPIKE

Range	Garden and outdoor multi-purpose floodlighting
Description	1 LED or 3 LED floodlighting. Low luminance version as optional. Rotary ball on bracket Waterproof driver box and connectors Ground rod RAL 7013 Khaki mat finishing (other upon request)
Installation	Installation diameter: 100mm No specific tools required
LED characteristics	2700K - 3000K - 4000K - 5000K CRI: 80
Optical beam	Intensive - Semi intensive - Extensive - Elliptic
Connection	Delivered with 1m standard cable
Integrated power supply	700mA max. integrated constant current driver
LED power	1 LED: 1.2W at 350mA - 1.8W at 500mA - 2.4W at 700mA 3 LED: 3.6W at 350mA - 5.4W at 500mA - 7.2W at 700mA
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

LOuss

Last update : 04/02/2019

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE