
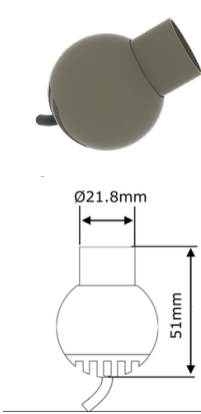


## ROLLED SPIKE

The garden lighting specialist

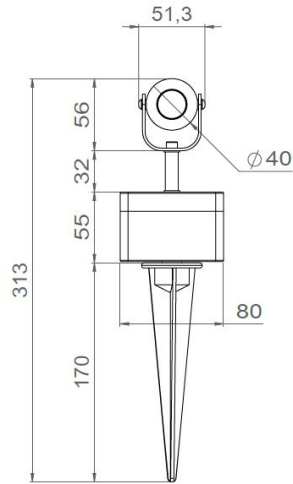

Low Luminance version

ROLLED SPIKE • Standard • Low Luminance

Range	Garden & outdoor multi-purpose floodlighting	
Description	1 LED or 3 LEDs floodlighting Rotary ball on bracket Supplied in Standard version or with a Low Luminance tube Waterproof junction box and connectors Ground rod	
Finish	Khaki RAL 7013 (other upon request)	
Dimensions	Spotlight	Junction box & Ground rod
	Diameter : 40mm Length : 51mm (Low Luminance) Width : 51.3mm (bracket included) Height : 88mm	Rod height : 170mm Junction box length : 80mm Junction box height : 55mm
LED characteristics	1 LED or 3 LEDs : 2700K – 3000K – 4000K – 5000K (other upon request) CRI 80	
Optical beams	Intensive – Semi intensive – Extensive – Elliptical	
Connection	Supplied with 1m cable (more length upon request)	
Integrated power supply	700mA max. integrated constant current driver in a waterproof junction box For the US & Canada use a UL class 2 driver	
LED power	1 LED : 2.4W at 700mA max. 3 LEDs : 7.2W at 700mA max.	
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use	
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature 3-year parts and labour warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in	

Tous les raccordements doivent impérativement être effectués avant la mise sous tension  
sous peine d'endommager sérieusement les LED

LOuss

Last update : 2025.07.28

Firalux & LOuss brands

SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
www.louss.fr  
Best group

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE