



## ROME SURFACE-MOUNTED



ROME I • II SURFACE-MOUNTED

|                       |                                                                                                                                                                                                            |                                                                                          |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| Range                 | Architectural floodlighting                                                                                                                                                                                |                                                                                          |
| Description           | Aluminum body<br>Rome I : Stainless steel fixing clip (Surface-Mounted)<br>Extra-clear or striated glass<br>2x3in1 LEDs<br><br>Rome II : Magnets (Surface-mounted Magnetic)<br>Extra-clear glass<br>8 LEDs |                                                                                          |
| Finish                | Paint – RAL 1013 or RAL 7030 (other upon request)                                                                                                                                                          |                                                                                          |
| Dimensions            | Rome I • Surface-mounted                                                                                                                                                                                   | Rome II • Surface-mounted Magnetic                                                       |
|                       | Length : 65.0mm<br>Width : 35.6mm<br>Height : 35.0mm<br>38.1mm (fixing clip included)                                                                                                                      | Length : 90.0mm<br>Width : 50.0mm<br>Height : 50.0mm<br>54.5 à 56.5mm (magnets included) |
| Weight                | Rome I                                                                                                                                                                                                     | Rome II                                                                                  |
|                       | 0.17 kg (without fixing clip)                                                                                                                                                                              | 0.50 kg (without magnets)                                                                |
| LED characteristics   | 2x3in1 LEDs or 8 LEDs : 2200K – 2700K – 3000K – 4000K (other upon request)<br>CRI 90                                                                                                                       |                                                                                          |
| Optical beams         | Rome I                                                                                                                                                                                                     | Rome II                                                                                  |
|                       | • Elliptical + extra-clear glass<br>• Optic + filter + extra-clear glass<br>• Optic + striated glass                                                                                                       | 10° - 15° - 20° - 25° - 30° - 40° - 50°<br>- Elliptical                                  |
| Connection            | Rome I                                                                                                                                                                                                     | Rome II                                                                                  |
|                       | Supplied with 1m cable<br>(more length upon request)<br>Individual or serial connection on external<br>constant current driver                                                                             | Supplied with 1m cable<br>(more length upon request)                                     |
| Separate power supply | Rome I                                                                                                                                                                                                     | Rome II                                                                                  |
|                       | 350mA max. external constant current driver<br>For the US & Canada use a UL class 2 driver                                                                                                                 | 48VCC external power supply<br><br>For the US & Canada use a UL class 2 power<br>supply  |
| LED power             | Rome I                                                                                                                                                                                                     | Rome II                                                                                  |
|                       | 6W max.                                                                                                                                                                                                    | 20W max.                                                                                 |

All the connections have to be made before powering up,  
otherwise the luminaire could be seriously damaged.





ROME I • II SURFACE-MOUNTED

|                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Use limitations | The drivers, if not delivered by LOuss, must be approved before use                                                                                                                                                                                                                                                                                                                                                                                                  |
| Warranty        | <p>Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature</p> <p>3-year parts and labour warranty</p> <p>The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product</p> <p>All products are electrically tested and received a functional burn-in</p> |



All the connections have to be made before powering up,  
otherwise the luminaire could be seriously damaged.



## ROME I Surface-mounted

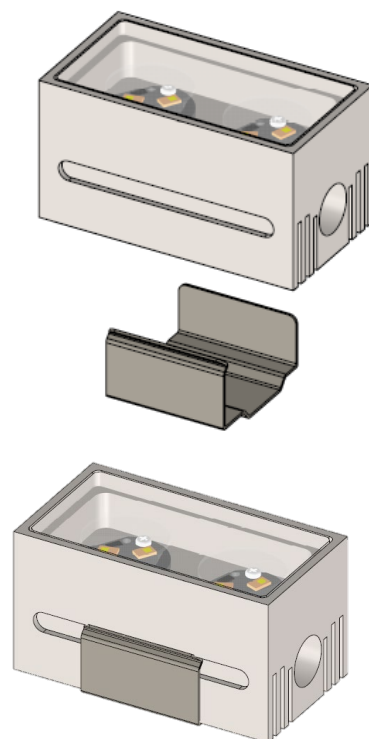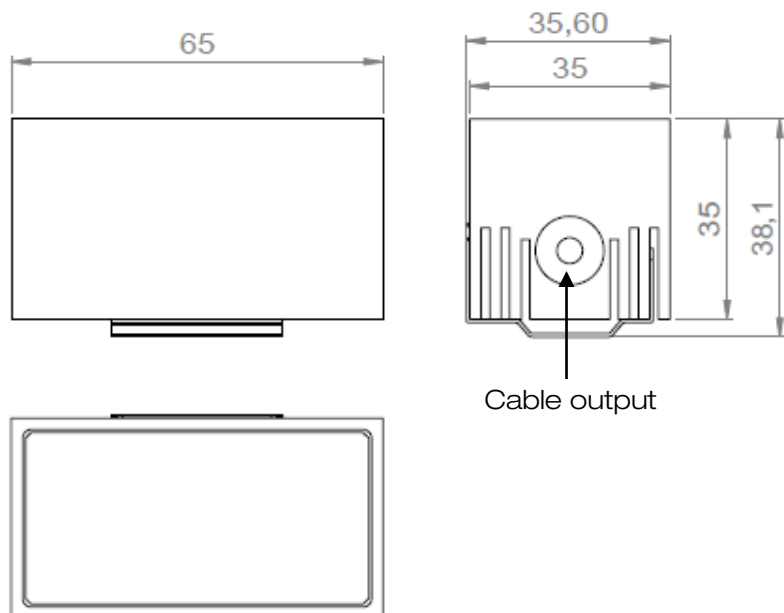

## ROME II Surface-mounted Magnetic

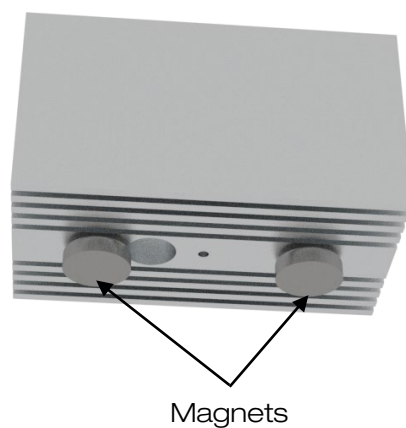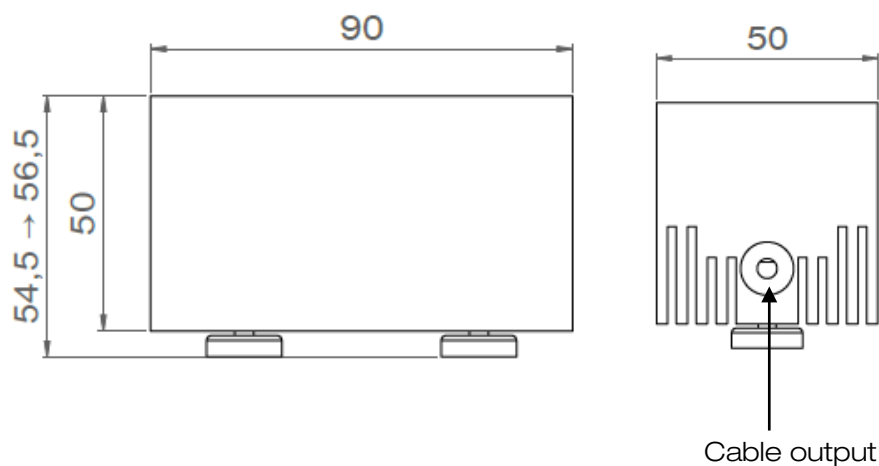

All the connections have to be made before powering up,  
otherwise the luminaire could be seriously damaged.

Last update : 2025.07.31

4/4

Louss

SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best group

Firalux & LOuss brands

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE