

Wouss


Lighting Emotion




SCAPINI S0



SCAPINI S1



SCAPINI S2




SCAPINI S3



SCAPINI S4

SCAPINI RANGE







SCAPINI

Common characteristics

Range	Accent decorative luminaire Designed by Benoît Laloz
Description	Body in anodised aluminium (natural or black) Directional bracket
Connection (excluding SCAPINI S4)	Delivered with 0.5m standard cable (more length upon request) Individual connection or connection in series on external constant current driver
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.



All the connections have to be made before powering up,
otherwise the luminaire could be seriously damaged.

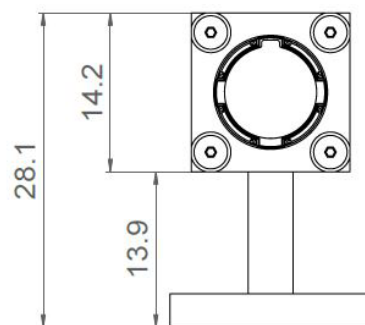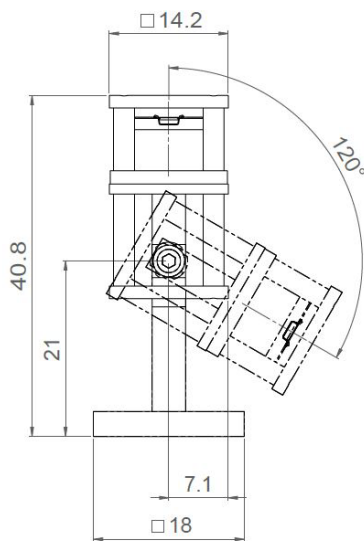

SCAPINI S0

Dimensions	See dimensional drawing
Net Weight	0.012 kg
LED characteristics	1 LED : 3000K – 4000K (other LED colours upon request)
Optical beam	15° - 25° - 40° - 80° (other optical beam upon request)
Connection	Delivered with 0.5m standard cable (more length upon request) Individual connection or connection in series on external constant current driver
Separate power supply	350mA – 500mA
LED power	350mA : 1.2W 500mA : 1.8W



All the connections have to be made before powering up,
otherwise the luminaire could be seriously damaged.

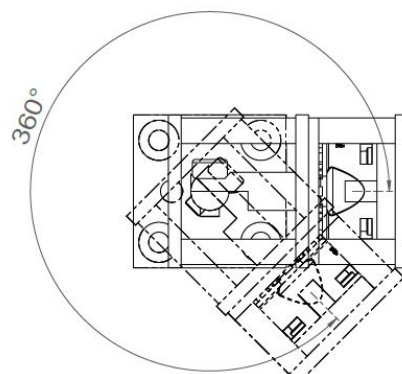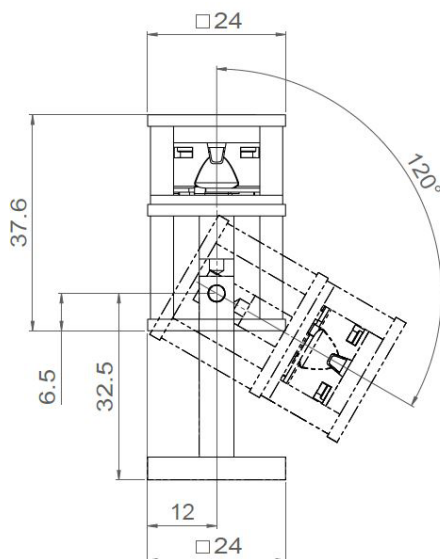

SCAPINI S1

Dimensions	See dimensional drawing
Net Weight	0.029 kg
LED characteristics	1 LED : 2700K - 3000K – 4000K (other upon request)
Optical beam	15° - 30° - 40° - 60° (other optical beam upon request)
Separate power supply	350mA – 500mA
LED power	350mA : 1.2W 500mA : 1.8W


All the connections have to be made before powering up,
otherwise the luminaire could be seriously damaged.

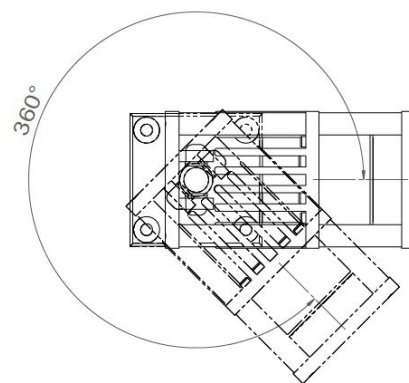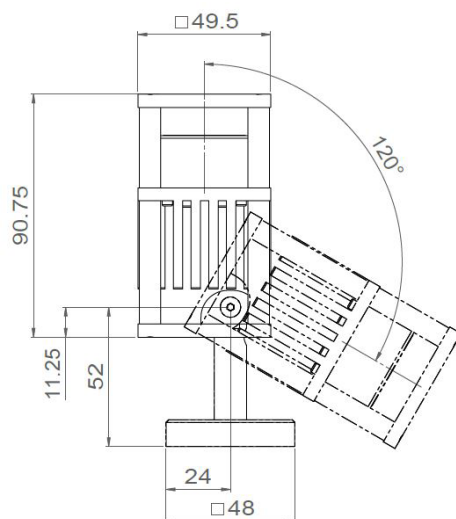

SCAPINI S2

Dimensions	See dimensional drawing
Net Weight	0.266 kg
LED characteristics	1 LED : 3000K – 4000K (other LED colours upon request)
Optical beam	15° - 50° (other optical beam upon request)
Separate power supply	350mA – 500mA
LED power	350mA : 4.8W 500mA : 7.2W


All the connections have to be made before powering up,
otherwise the luminaire could be seriously damaged.

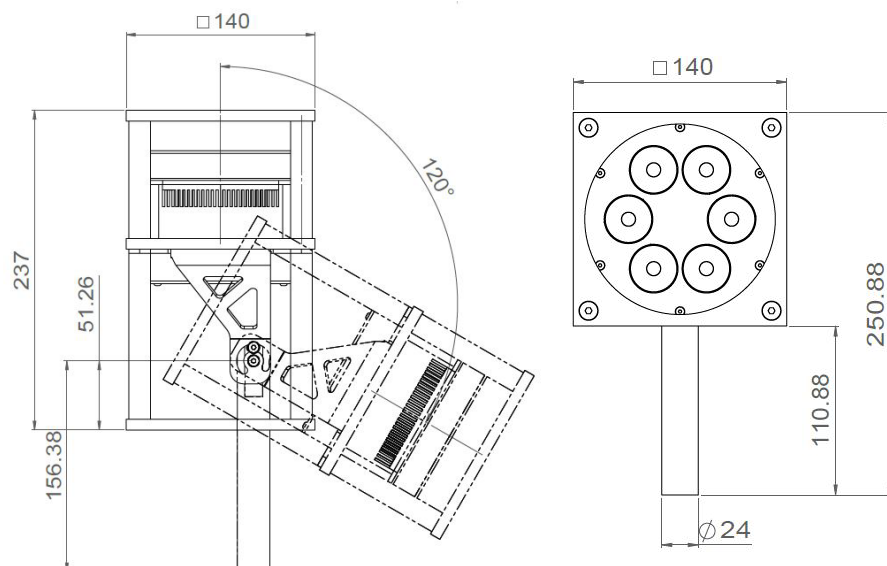

SCAPINI S3

Dimensions	See dimensional drawing
Net Weight	6.6 kg
LED characteristics	6 LED : 3000K – 4000K (other upon request)
Optical beam	6° - 15° - 35° (other optical beam upon request)
Integrated power supply	230 Vac
LED power	15W

All the connections have to be made before powering up,
otherwise the luminaire could be seriously damaged.

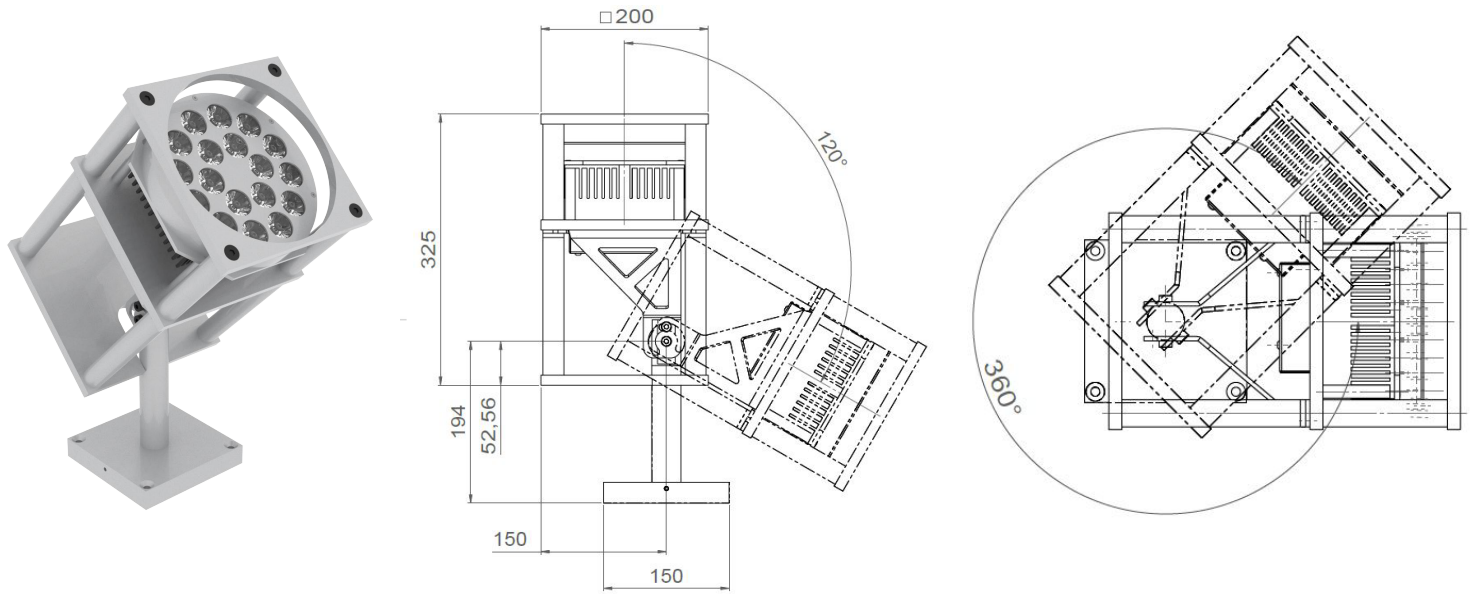

SCAPINI S4

Dimensions	See dimensional drawing
LED characteristics	18 LED : 3000K – 4000K (other LED colours upon request)
Optical beam	6° - 15° - 35° (other upon request)
Connection	Delivered with 1m standard cable (more length upon request) Direct connection: 230V
Integrated power supply	230Vac
LED power	50W

All the connections have to be made before powering up,
otherwise the luminaire could be seriously damaged.