


Wouss

Lighting Emotion



UNDO





Solo



Multiple



Recessed
Magnetic Trim



Recessed
Trim



Fixed Trimless

UNDO

Range	High power versatile luminaires for accent lighting, dedicated to precision lighting & highlighting of showcases	
Description	Solo & Multiple	Recessed Magnetic Trim
	Spotlights versions : • Standard • Standard with accessories • Low Luminance • Low Luminance with accessories Orientation 360° - Adjustable tilt 115° Spotlight(s) mounted on a metallic bar using fixing bracket(s)	Screw-in insert Magnetic spotlight
	Recessed Trim	Fixed Trimless
	Fixation with springs Standard or Low Luminance version	Mounting frame Simple straight or tilted version (10°-15°-20°) Double version (0° + 15°)
Finish	Black anodized aluminum matt finish (other upon request)	
Dimensions	Solo & Multiple	Recessed Magnetic Trim
	Dimensions per spotlight Diameter : 39.5mm Length : 37.1mm (Standard) 40.4mm (Standard + accessories) 52.2mm (Low Luminance) 55.4mm (LL + accessories) Bar dimensions Width : 8mm (without fixing brackets) Height : 8mm (without fixing brackets) Total height : 79mm max. (spotlight + bar)	External diameter : 51mm Spotlight diameter : 43mm Installation diameter : 45mm Installation depth : 51mm
	Recessed Trim	Fixed Trimless
	External diameter : 43.5mm Spotlight diameter : 39.5mm Installation diameter : 39.5mm Installation depth : 57mm (Standard) 73mm (LL)	Spotlight diameter : 44mm Installation depth : 67 to 80mm Fixing plate dimensions : 90 x 140mm 180 x 140mm (Double version)
LED characteristics	1 LED or 4in1 LED : 2200K – 2700K – 3000K – 3500K – 4000K – 4500K – 5700K (other upon request) Or mix of color temperatures CRI 80 – 90 – 92 – 95 according to version	

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.



Solo



Multiple



Recessed
Magnetic Trim



Recessed
Trim



Fixed Trimless

UNDO

Optical beams	3.3° - 7° - 11° - 16° - 17° - 21° - 23° - 29° - 31° - 33° - 35° - 42° - 56° - 60° - Asymmetrical
Accessories	Filters, honeycomb grid upon request
Connection	Supplied with 0.5m cable (more length upon request) Individual or series connection on external constant current driver
External power supply	700mA max. External constant current driver For the US & Canada use a UL class 2 driver
LED power	9W at 700mA max.
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labor warranty The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and received a functional burn-in

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.



Last update : 2025.07.15

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




UNDO SOLO UNDO MULTIPLE


Spotlights dimensions

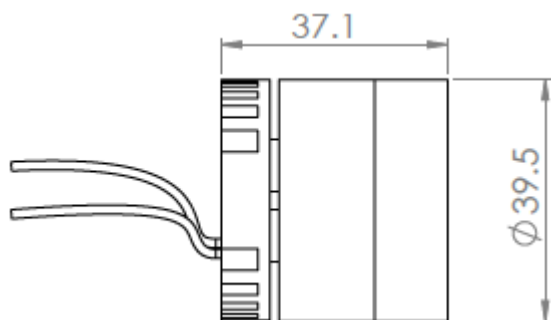


Standard version

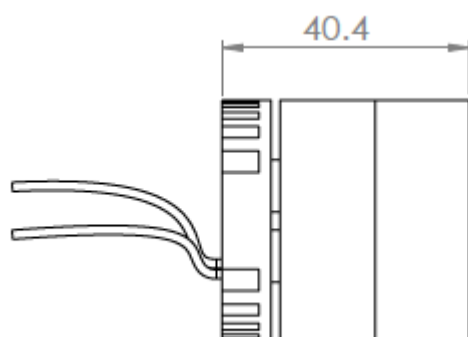

Standard + accessories version
(glass, filters, honeycomb grid...)

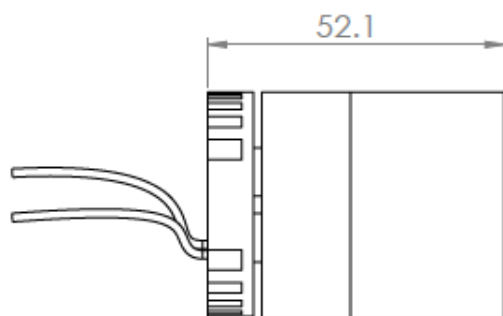

Low Luminance version

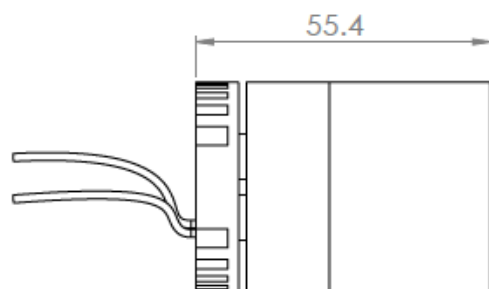


Low Luminance + accessories version
(glass, filters, honeycomb grid...)

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.






UNDO MULTIPLE

Standard version

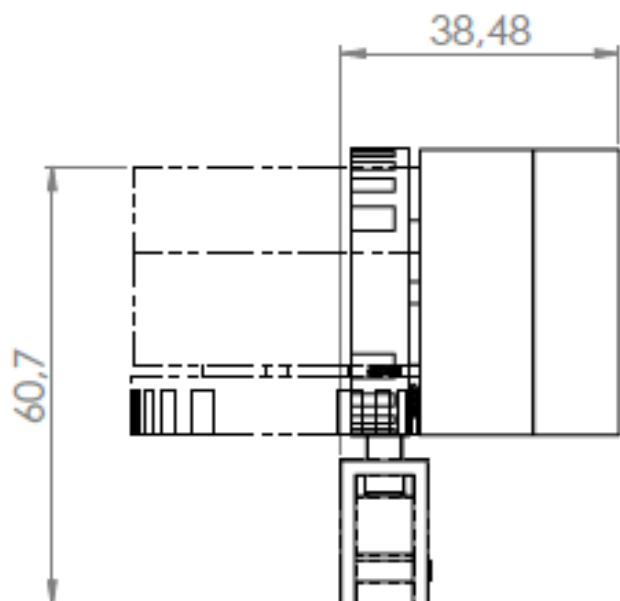

Low Luminance + accessories version

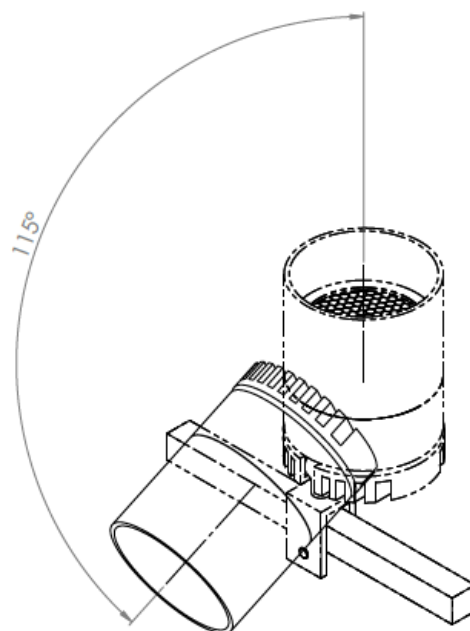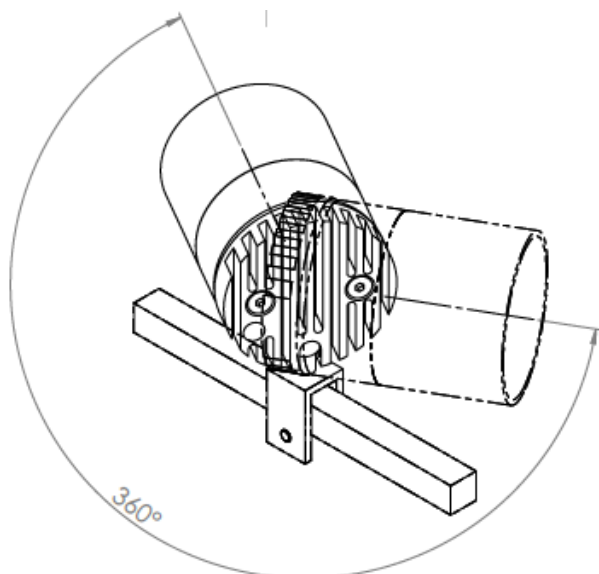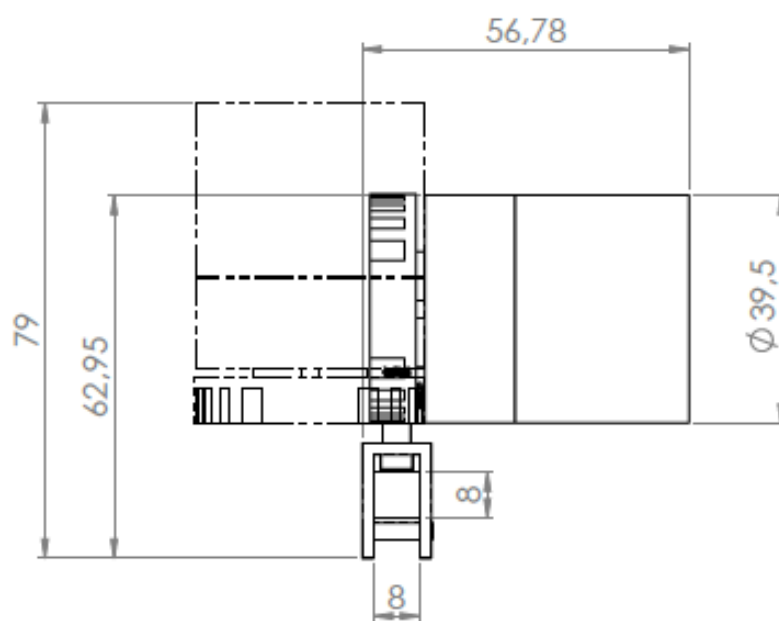

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Last update : 2025.07.15

5/11


Firalux & LOuss brands

LOuss

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

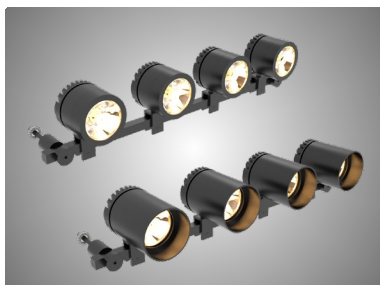

UNDO SOLO • MULTIPLE

Installation guide

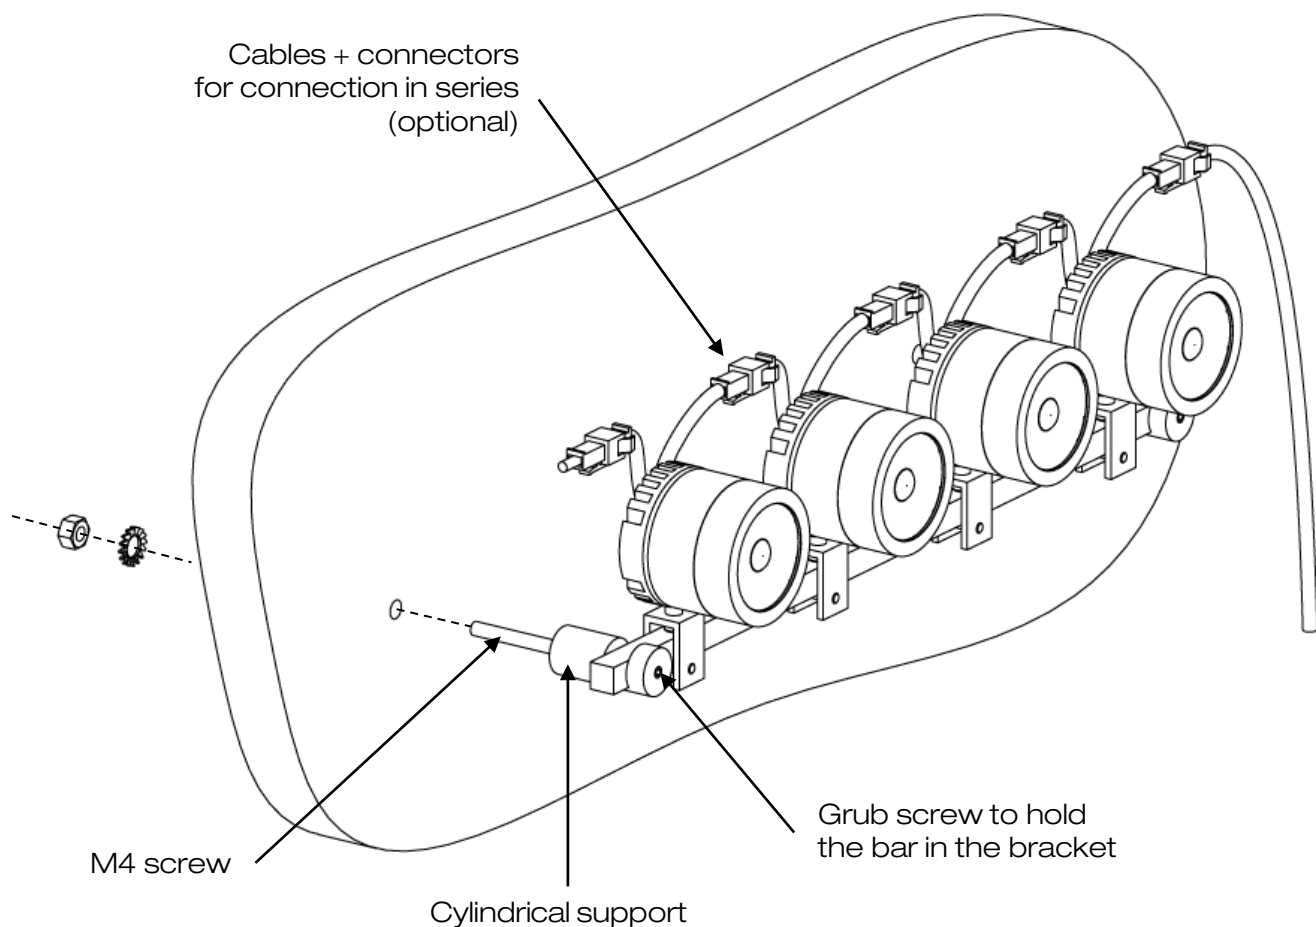

Tous les raccordements doivent impérativement être effectués avant la mise sous tension sous peine d'endommager sérieusement les LED

LOUSS

Mise à jour : 15.07.2025

6/11

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z




Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



UNDO RECESSED MAGNETIC TRIM

Dimensions & Installation guide

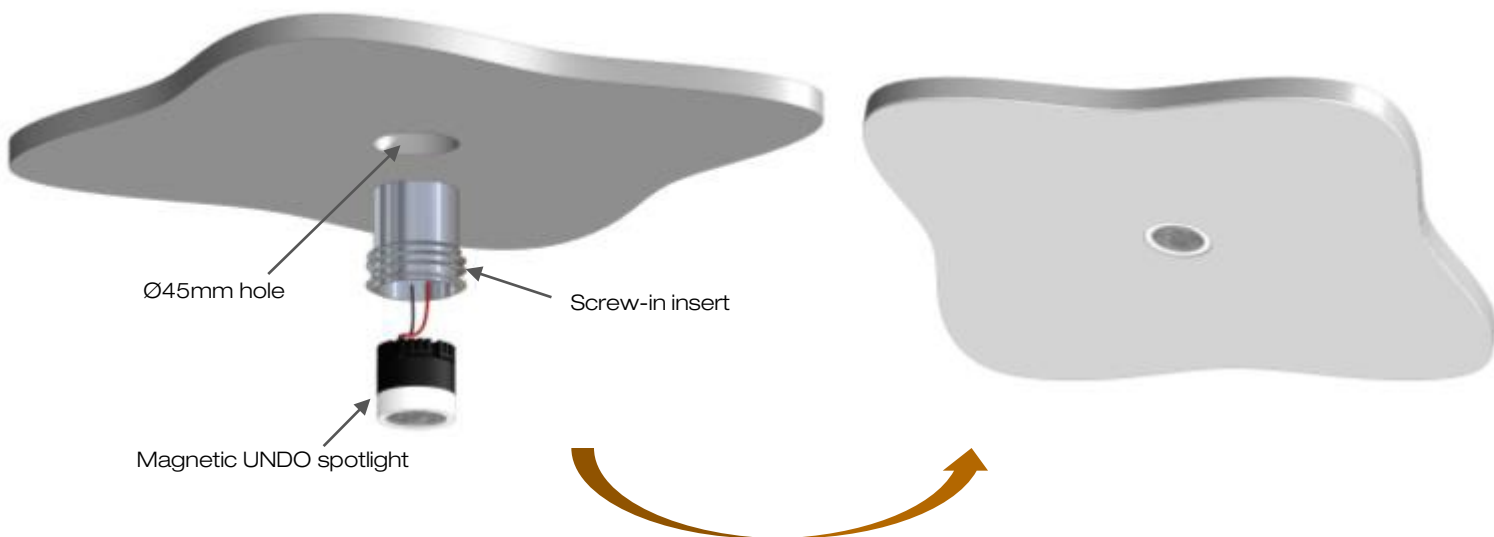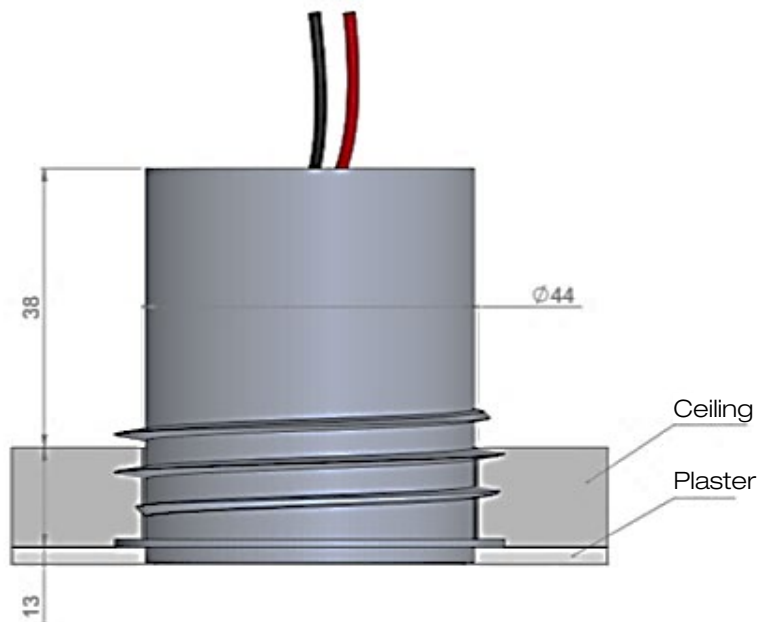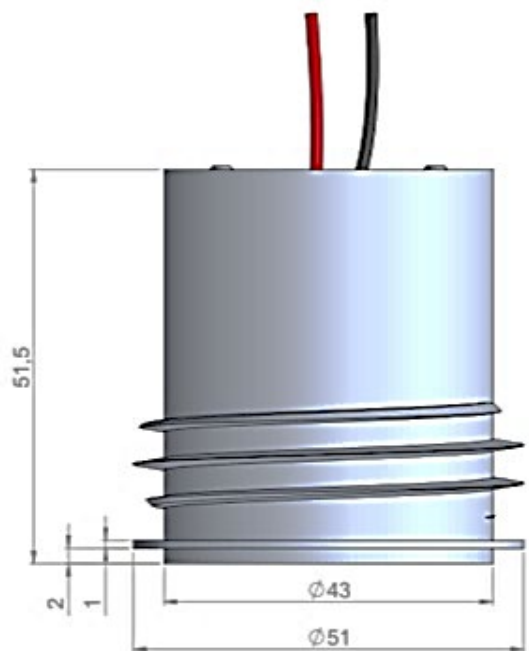

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Louss

Last update : 2025.07.15

7/11

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z



Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





UNDO RECESSED TRIM

Standard version

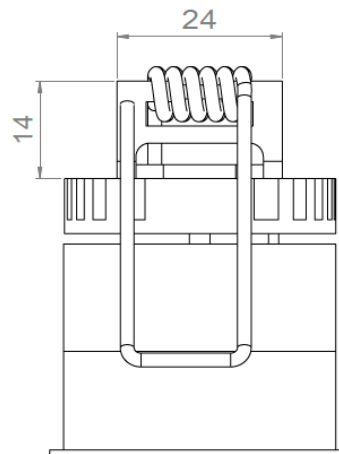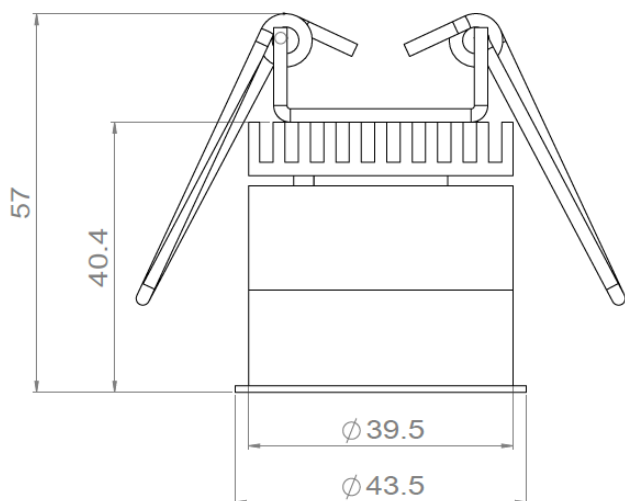

Low Luminance version

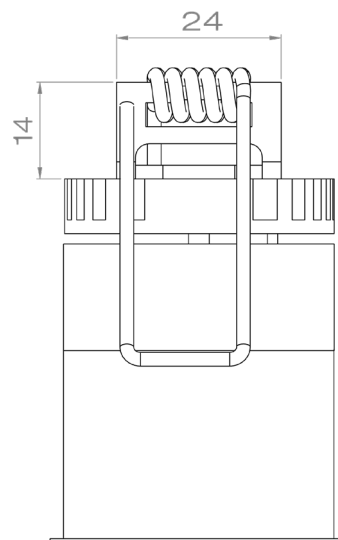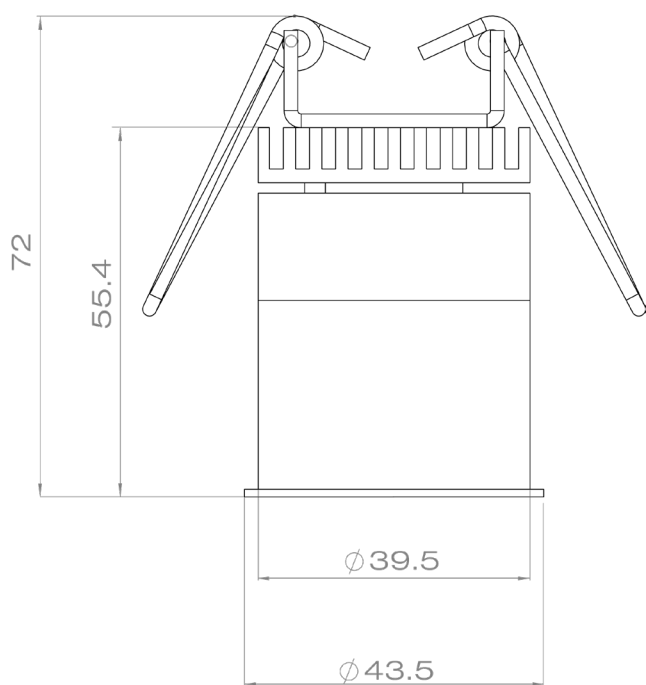

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

LOUSS

Last update : 2025.07.15

8/11

Firalux & LOUSS brands



SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE






UNDO FIXED TRIMLESS 0° version

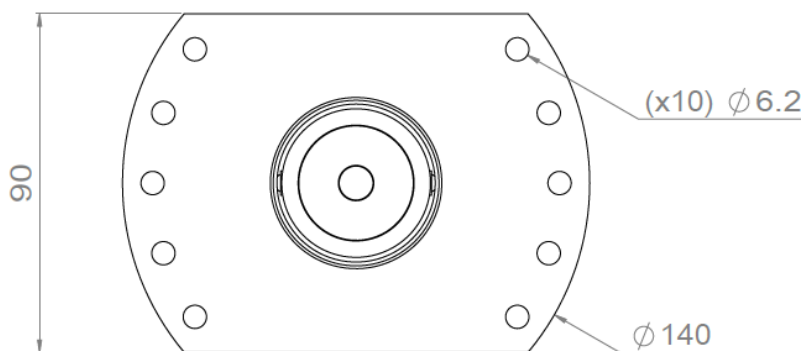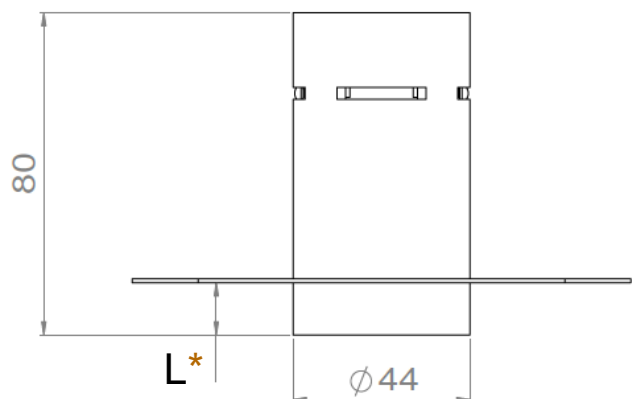

L^* : 1mm to 13mm to be specified when ordering
(other lengths upon request)



UNDO FIXED TRIMLESS 10° version

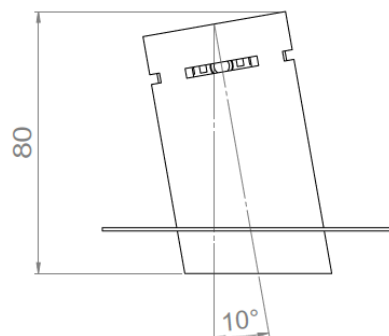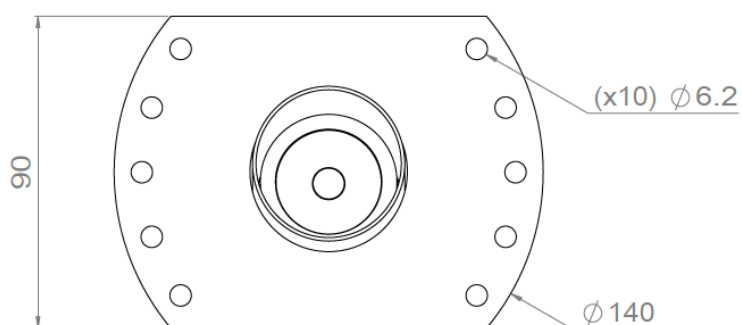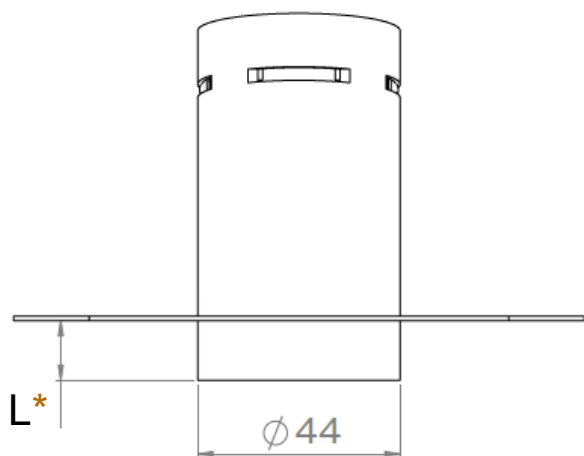

L^* : 1mm to 13mm to be specified when ordering
(other lengths upon request)

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Last update : 2025.07.15

9/11

Firalux & LOuss brands

LOuss



SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





UNDO FIXED TRIMLESS 15° version

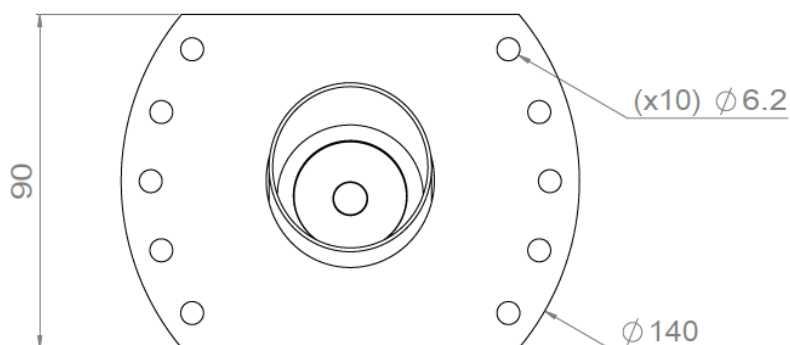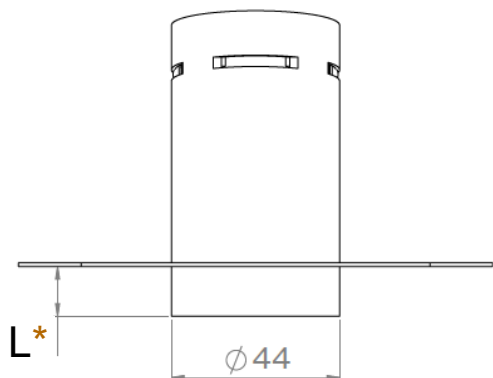


L^* : 1mm to 13mm to be specified when ordering
(other lengths upon request)



UNDO FIXED TRIMLESS 20° version

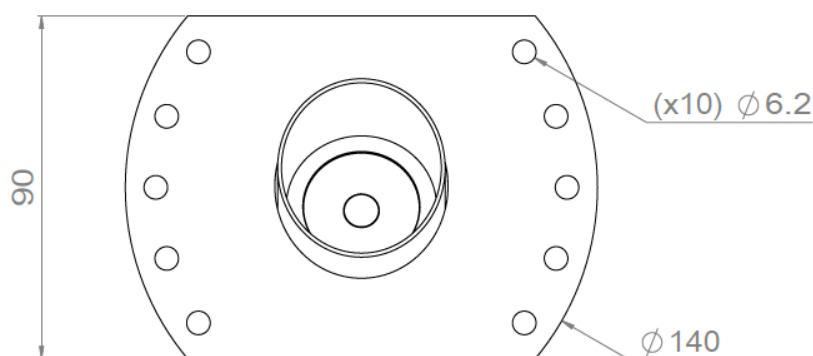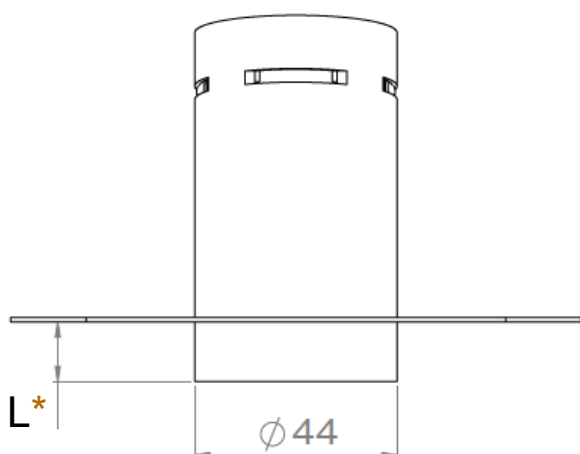

L^* : 1mm to 13mm to be specified when ordering
(other lengths upon request)



All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Last update : 2025.07.15

Louss

10/11

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




UNDO FIXED TRIMLESS Installation Guide


Installation from above




Install the recessed box from above and screw it into the surface




Cover the lateral plates of the recessed box by coating and painting




Insert the spotlight from below

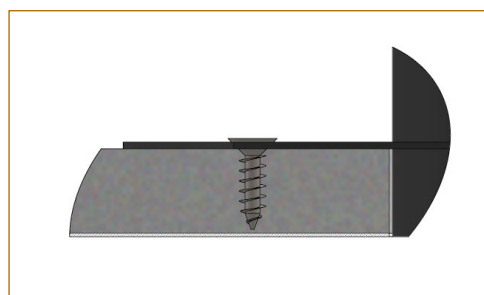


Installation from below




Install the recessed box from below and screw it into the surface



Cover the lateral plates of the recessed box by coating and painting



Insert the spotlight from below

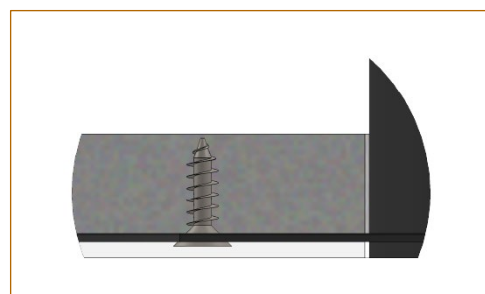

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Last update : 2025.07.15

Louss

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

11/11

Firalux & LOuss brands