

24/48V-S




24/48V DALI



230V



230V DALI

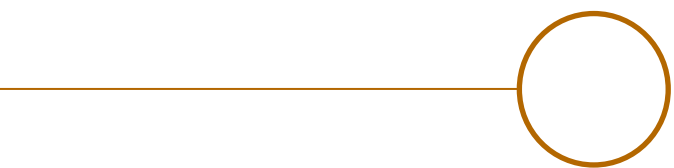

AURORE D52 TRACK



AUORE D52 ON TRACK • 24/48V-S • 24/48V Dali • 230V • 230V Dali

Range	Highly flexible spotlight on track for general & accent lighting	
Description	Low luminance Rotation 360° - Adjustable tilt 90°	
Finish	White RAL 9003 matt finish Black RAL 9005 matt finish (other upon request)	
Dimensions	24/48V-S • DALI 24/48V	230V • DALI 230V
	Spotlight Diameter : 52mm Length : 96mm ($\leq 13W$) 140mm ($\leq 20W$) Driver's length : 98mm (ON/OFF) 166mm (DALI) Stucchi Evo System Track ST1 : 26.2 x 21mm	Spotlight Diameter : 52mm Length : 96mm ($\leq 13W$) 140mm ($\leq 20W$) Driver's length : 162mm (ON/OFF) 253.5mm (DALI) Track Dimensions : 31.5 x 35.5mm
Net weight	24/48V-S • DALI 24/48V	230V • DALI 230V
	Spotlight (driver included) ± 0.270 kg according to version Stucchi Evo System Track ST1 : 0.7 kg/m	Spotlight (driver included) ± 0.5 kg according to version Track ± 1 kg/m
LED characteristics	2700K - 3000K - 3500K - 4000K - 5000K (other upon request) MacAdam ellipse : 3 SDCM (standard) 2 SDCM (premium) CRI 90 - 95 - 98	
Optical beams	7° - 12° - 15° - 20° - 25° - 30° - 35° - Elliptical UGR < 15	
Accessories	Filters, honeycomb grid, chamfered spotlight body upon request	
Luminous flux	24/48V-S • 24/48V DALI	230V • 230V DALI
	600 to 1,200 lumen according to version	600 to 2,000 lumen according to version
Integrated Power supply	24/48V-S • DALI 24/48V	230V • DALI 230V
	Spot adaptor for 24/48V Stucchi Evo System track	230V : Track adapter suitable for Global Trac PRO XTS or similar (ERCO, Trajectoire...) 230V DALI : • Track adapter suitable for Global Trac Pulse, STUCCHI, SLV... • Optional : CASAMBI-DALI gateway (see page 6)

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Creation : 2020.05.19 / Last update : 2025.10.30

2/6

Louss


BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOuss


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AURORE D52 24/48V-S TRACK

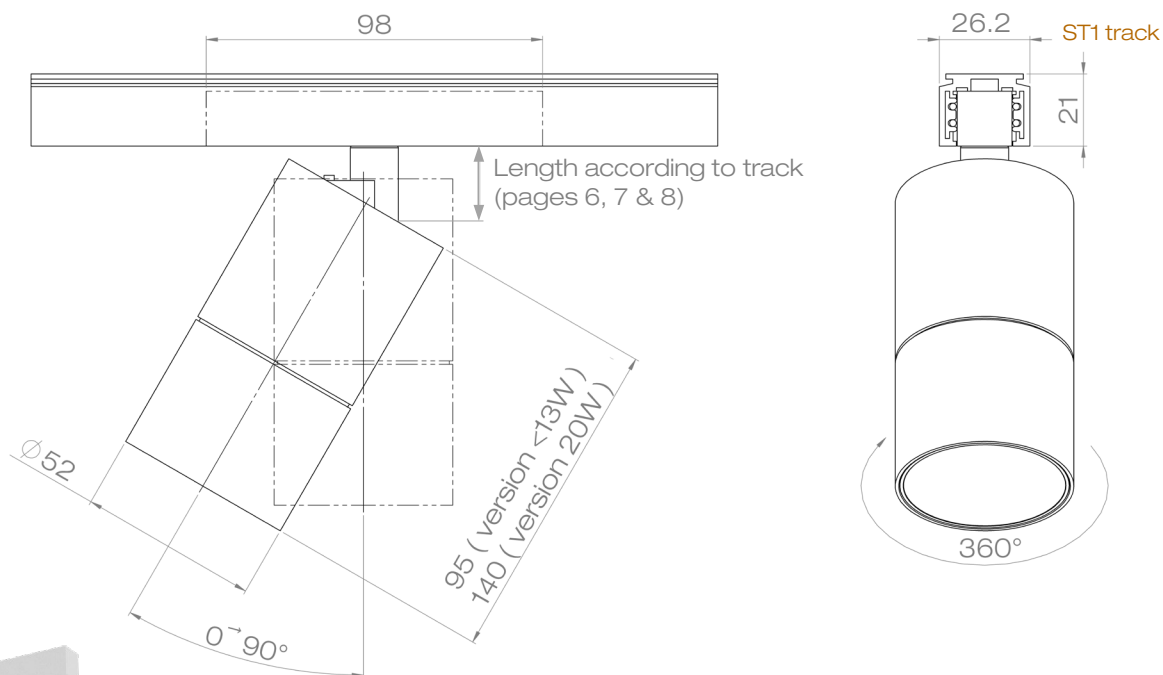

AURORE D52 24/48V DALI TRACK

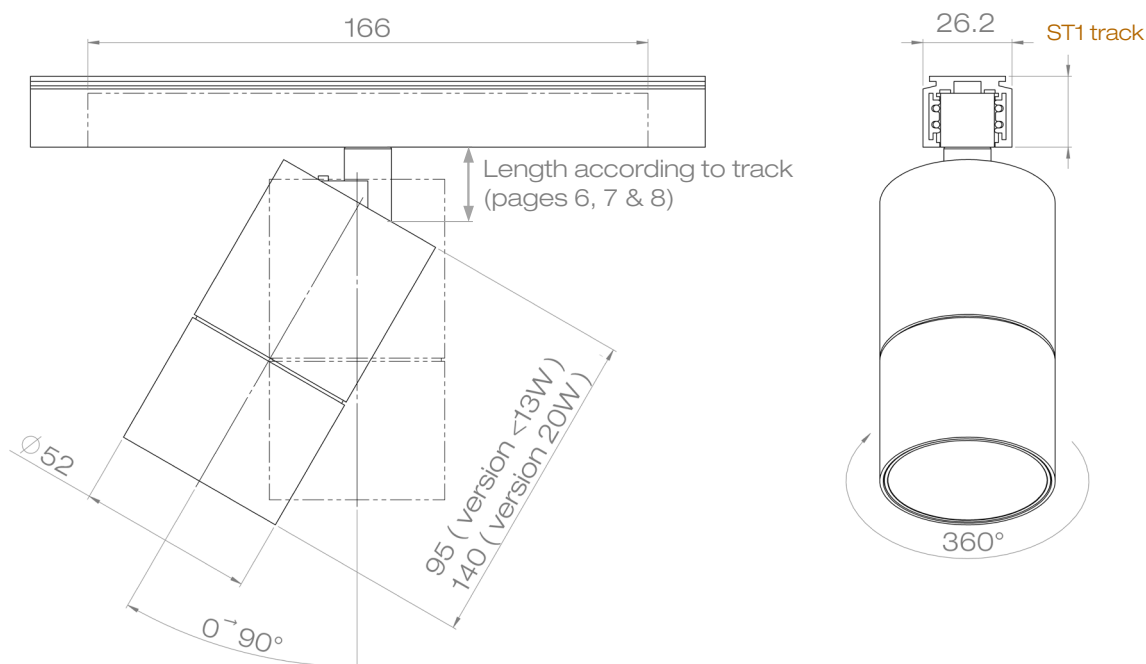

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Creation : 2020.05.19 / Last update : 2025.10.30

Louss

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z



Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOUSS

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





AURORE D52 230V TRACK

Track Global Trac PRO
Warning: Dimensions may vary by a few mms from one manufacturer to another

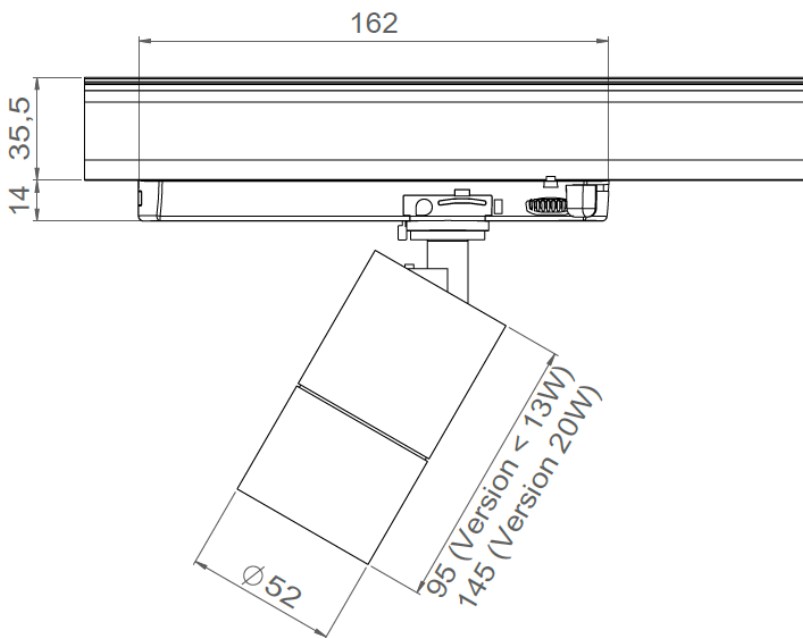

AURORE D52 230V DALI TRACK

Track DALI Global Trac pulse
Warning: Dimensions may vary by a few mms from one manufacturer to another

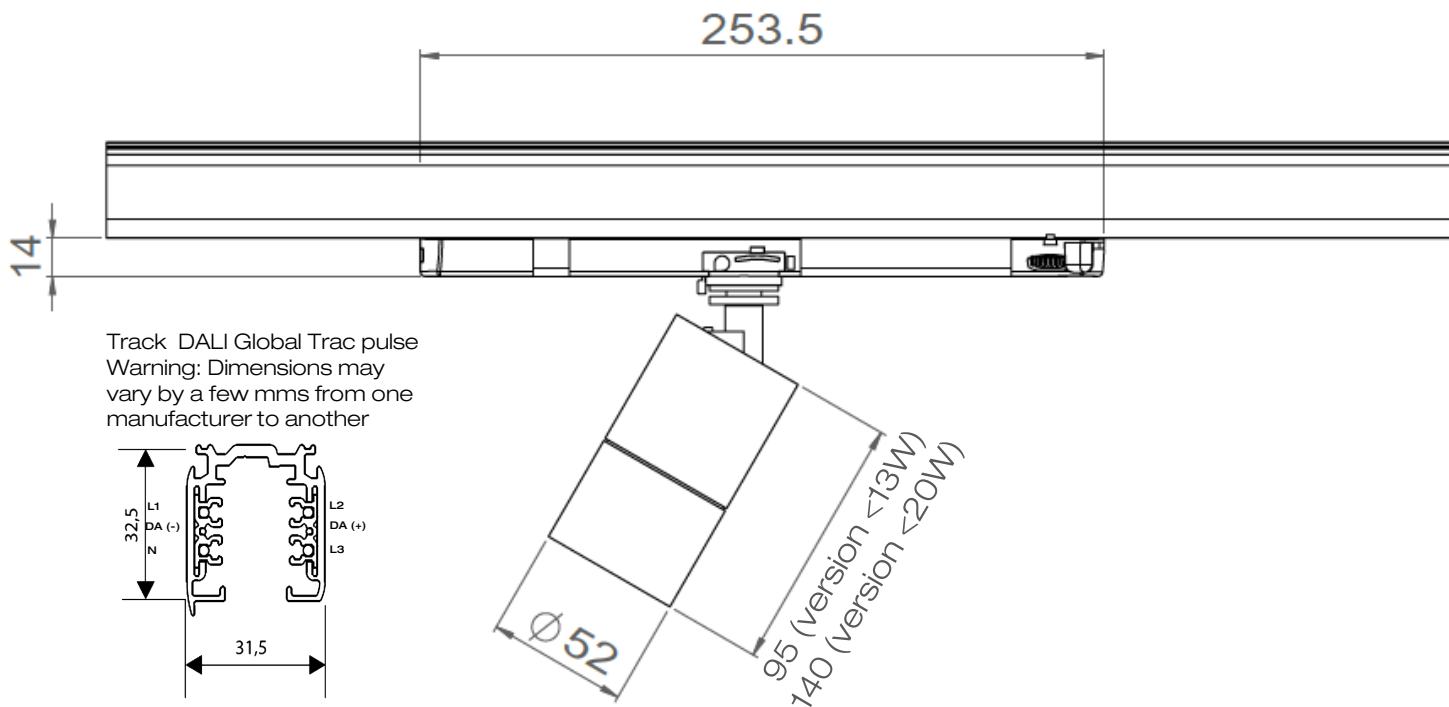

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Creation : 2020.05.19 / Last update : 2025.10.30

Louss


BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOuss

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



AUORE D52 230V TRACK CASAMBI-DALI Wiring system

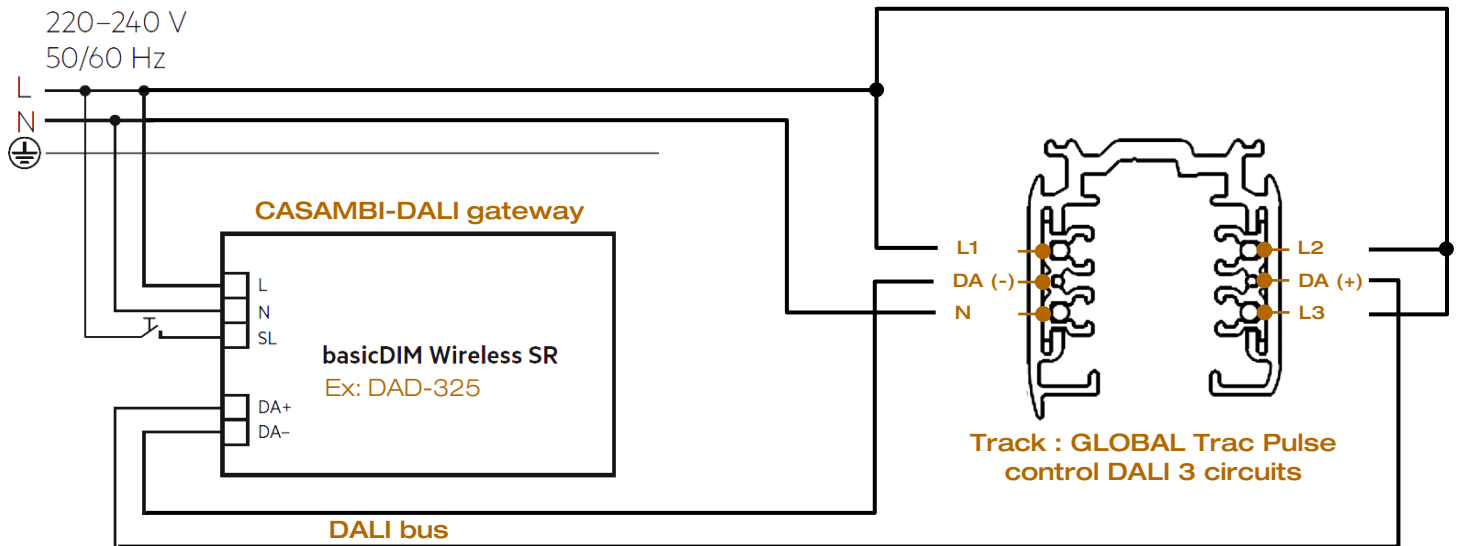

CAUTION : 25 drivers maximum per track

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged

Creation : 2020.05.19 / Last update : 2025.10.30

LOUSS

BEST SAS, Capital 200 000€
RCS Dijon B 408 483 485
TVA/VAT n° : FR94 408 483 485
APE 2612Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best & LOUSS

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE