




PIANO

The thin & elegant linear LED light

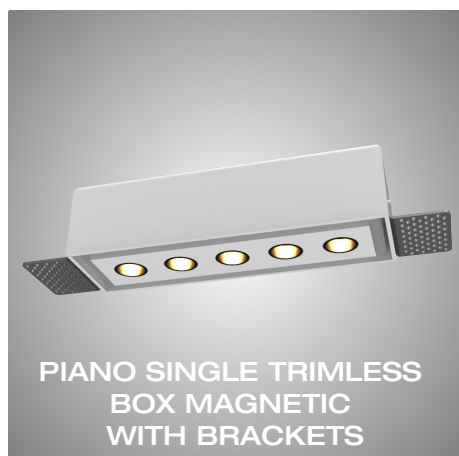

SINGLE
RECESSED



SINGLE
TRIMLESS BOX



SINGLE TRIMLESS
MAGNETIC BOX



SINGLE TRIMLESS
BOX MAGNETIC
WITH BRACKETS



TRIMLESS
CUSTOM LENGTH

Range	Decorative linear LED light low luminance for accent & ambient lighting
Piano Single Recessed Description	Recessed aluminum profile with trim 114x39x33.6mm 5 LEDs with low luminance black tubes: • Straight • Tilted 7° - 10° - 15° Paint finish according to requested RAL Net weight : 0.120 kg
Piano Single Trimless Box Description	Trimless recessed aluminum profile 5 LEDs with low luminance black tubes: • Straight • Tilted 7° - 10° - 15° Recessed aluminum frame with fixing brackets (installation of the driver on the top of the luminaire) Dimensions : 117x36x26.5mm (frame included) Paint finish according to requested RAL Net weight : 0.150 kg
Piano Single Trimless Box Magnetic Description	Trimless recessed aluminum profile with magnets 5 LEDs with low luminance black tubes: • Straight • Tilted 7° - 10° - 15° Recessed box for jutting-out installation (remote installation of the driver) Dimensions : 117x36x30mm Paint finish according to requested RAL Net weight : 0.140 kg
Piano Single Trimless Box Magnetic with brackets Description	Trimless recessed aluminum profile with magnets 5 LEDs with low luminance black tubes: • Straight • Tilted 7° - 10° - 15° Recessed box with aluminum fixing brackets (remote installation of the driver) Dimensions : 117x30x36mm (157x36x30mm with fixing brackets) Paint finish according to requested RAL Net weight : 0.150kg

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

2/18

Louss

Last update : 2025/06/10 - R

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



SINGLE
RECESSED



SINGLE
TRIMLESS BOX



SINGLE TRIMLESS
MAGNETIC BOX



SINGLE TRIMLESS
BOX MAGNETIC
WITH BRACKETS



TRIMLESS
CUSTOM LENGTH

Piano Trimless Custom Length Description	Trimless recessed aluminum profile with custom length 32x20.2mm – Length upon request: 2500mm max. Paint finish according to requested RAL Modules of 5 LEDs with low luminance black tubes (12 modules max.): • Straight • Tilted 7° • Tilted 10° • Tilted 15° Recessed box with aluminum brackets or metal plate, according to installation requirements Net weight: 1.2Kg/meter
LED characteristics	2700K – 3000K – 3500K – 4000K (other upon request) CRI 92 R9 > 80 3 SDCM
Optical beams	16° - 21° - 28° - 38° - 40° - 50° (UGR < 14) - 65° - Elliptical 16°x40°
Connection	Delivered with 0.5m cable
Power supply	Remote constant current driver 700mA max
Electrical class	III
Power	10W per module of 5 LEDs = 60W max. (12 modules)
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span: L80-B10 = 35,000 hours (80% remaining flux) at 30°C ambient temperature The warranty applies to components and fabrication supplied by Louss The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and receive a functional burn-in

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

3/18

LOuss

Last update : 2025/06/10 - R

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z




Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE








PIANO SINGLE RECESSED

Dimensions & Installation guide

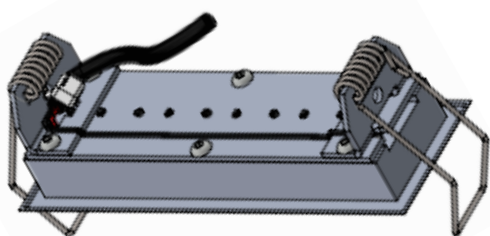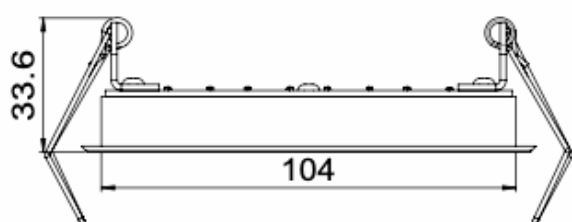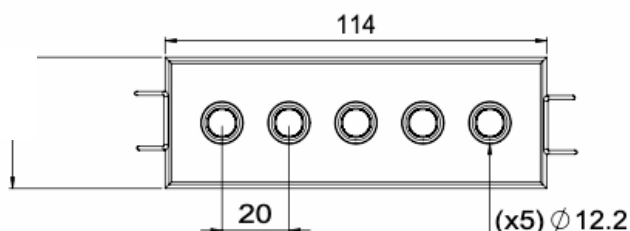

Install on the underside of a support
5 to 15mm thickness

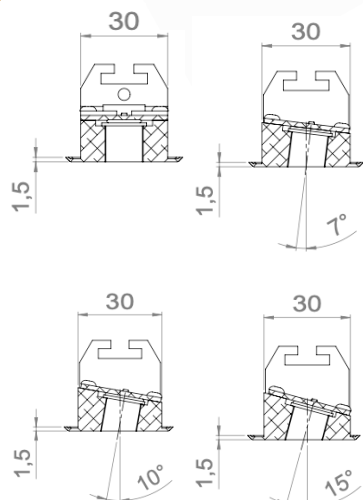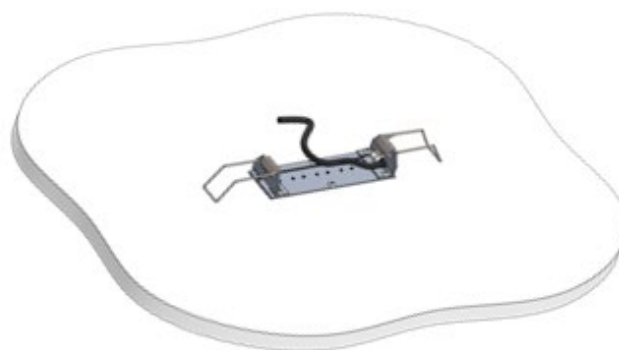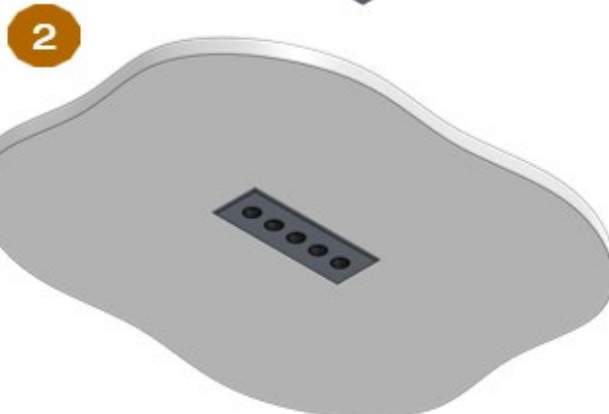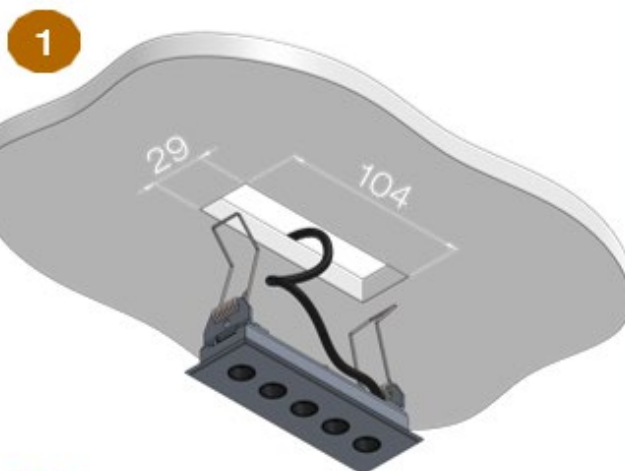

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

4/18

Wouss

Last update : 2025/06/10 - R

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z



Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




PIANO SINGLE TRIMLESS

Dimensions & Installation Guide

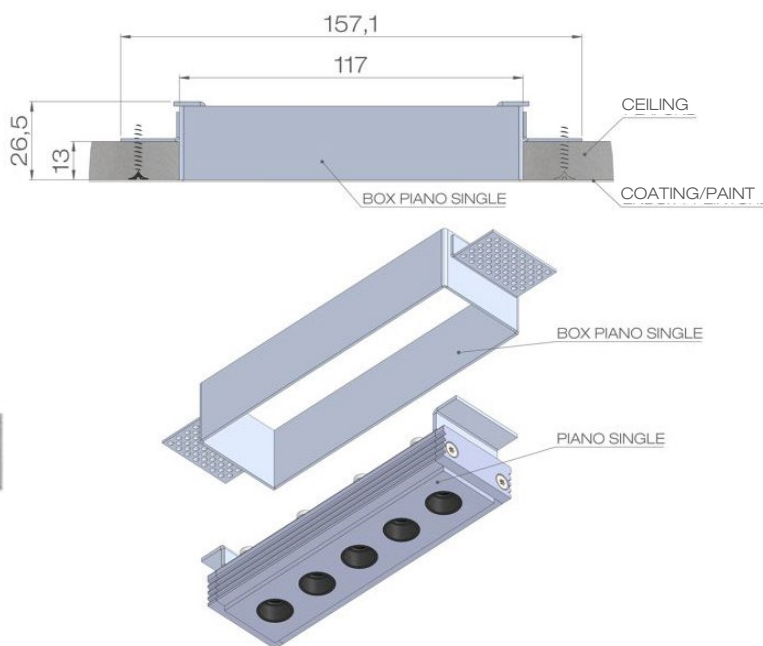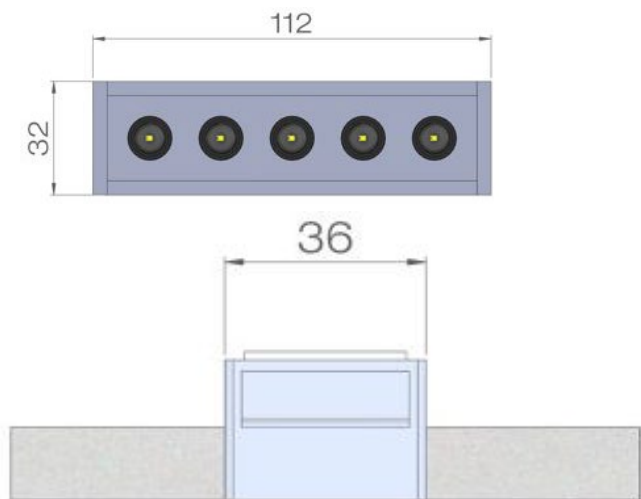


Installation guide

Installation in standard 13mm plasterboard with recessed box

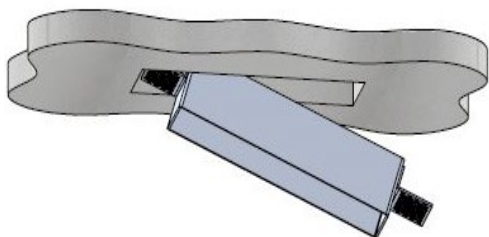


1

Install the recessed box from above

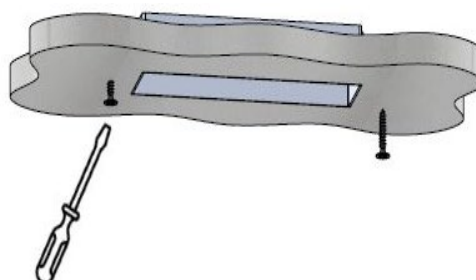


2

Screw the recessed box in into the surface

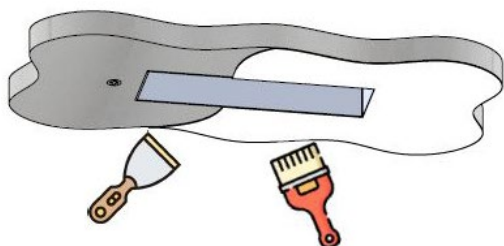

3

Cover the lateral plates of the recessed frame by coating and painting

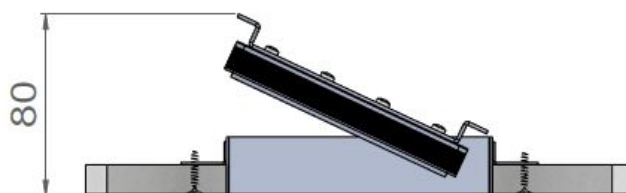

4

Insert the spotlight

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

5/18

Louss

Last update : 2025/06/10 - R

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




PIANO SINGLE TRIMLESS BOX MAGNETIC

Jutting-out installation

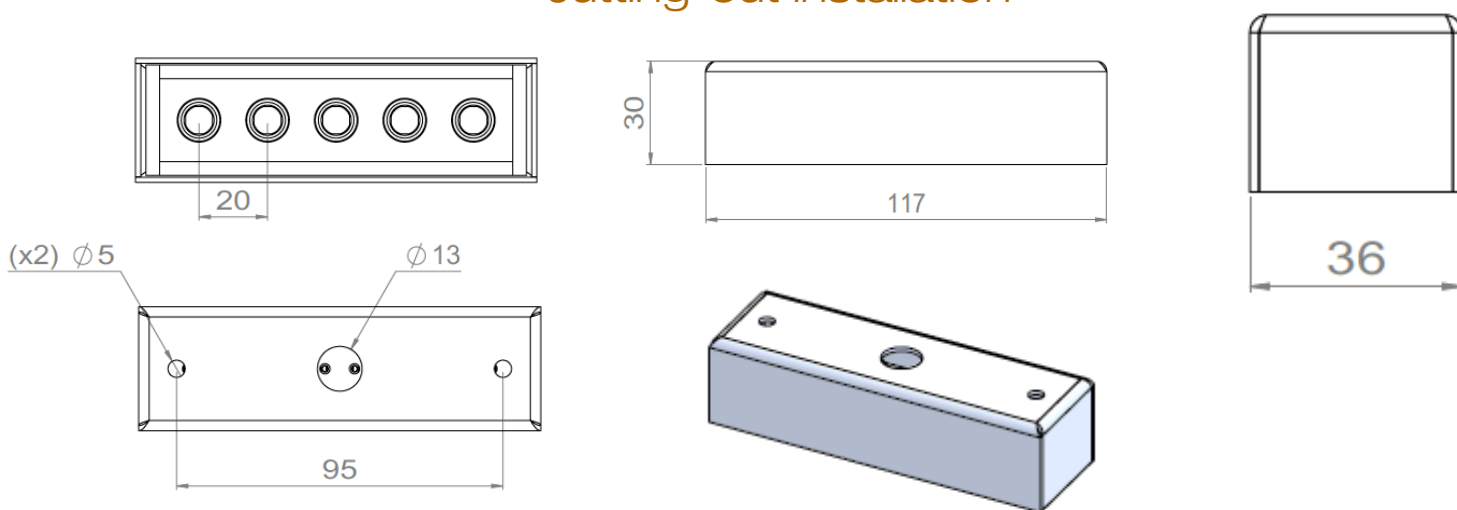

PIANO SINGLE TRIMLESS BOX MAGNETIC WITH BRACKETS

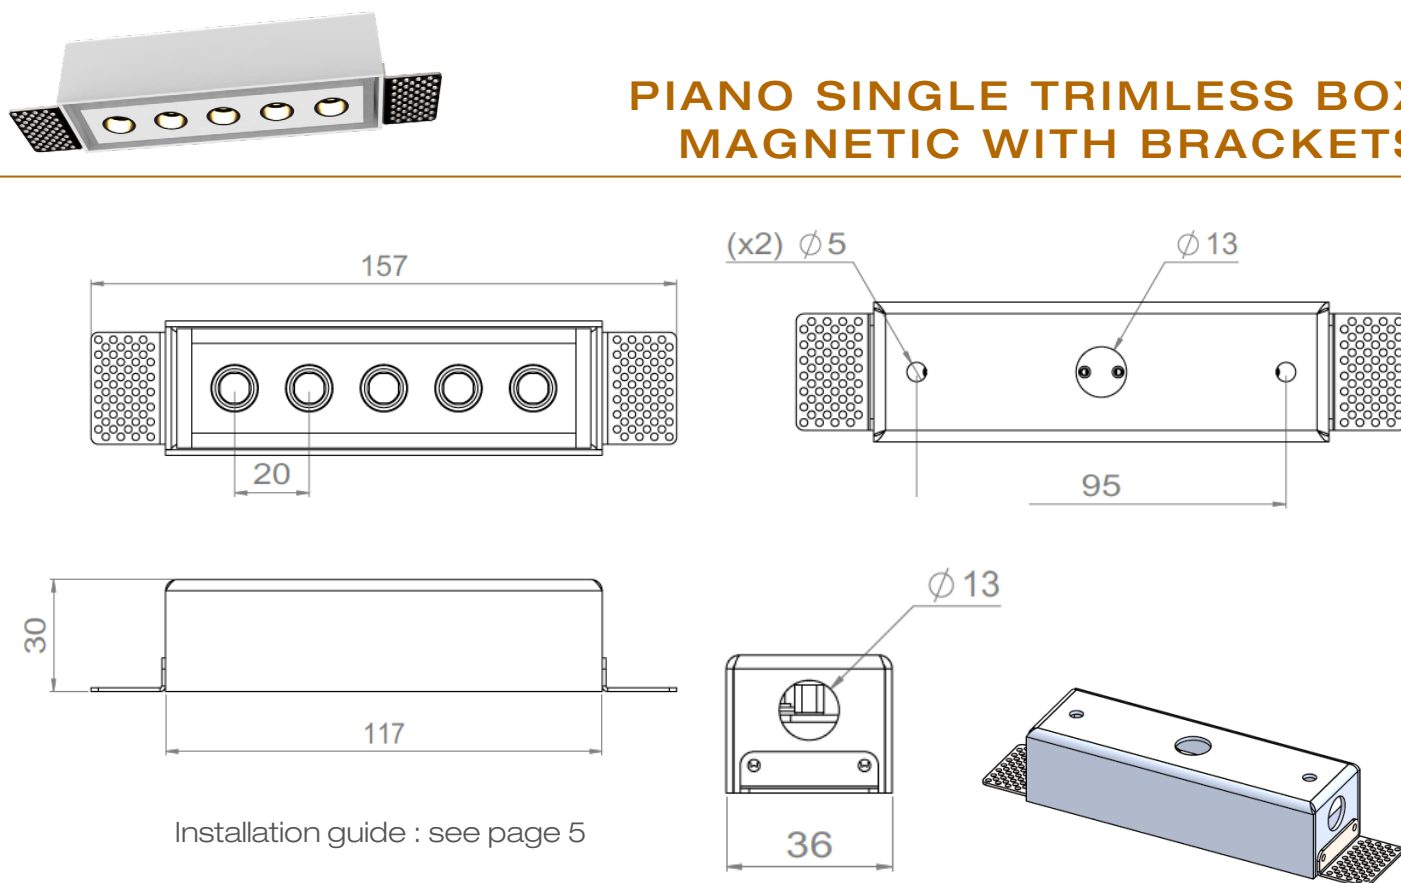

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

6/18

LOUSS

Last update : 2025/06/10 - R

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group



Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



PIANO TRIMLESS CUSTOM LENGTH

Dimensions & Installation guide

Installation in standard 13mm plasterboard with recessed box

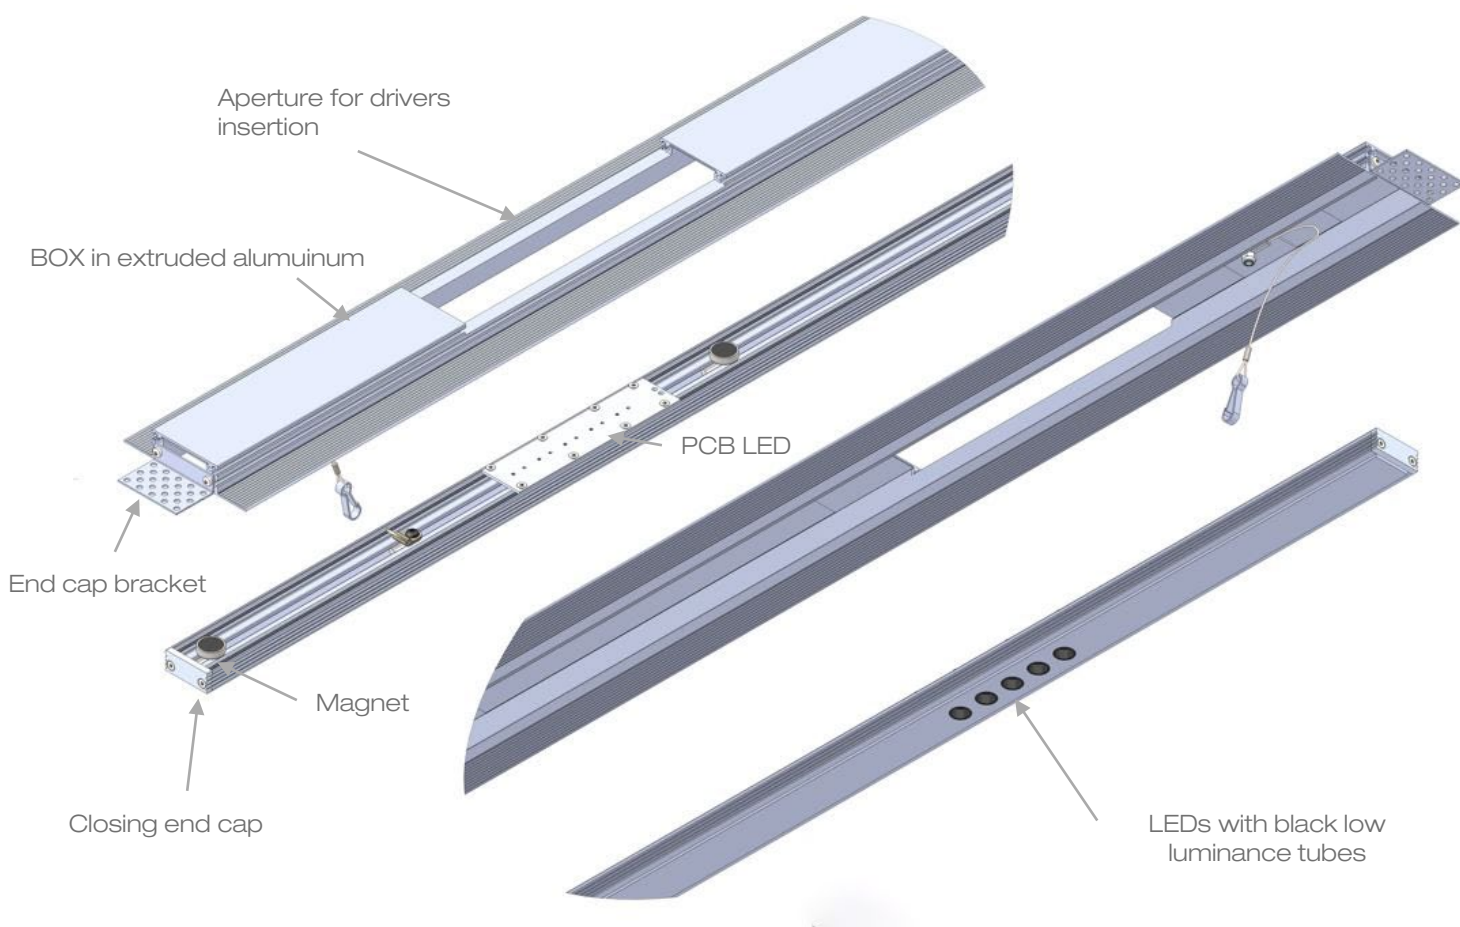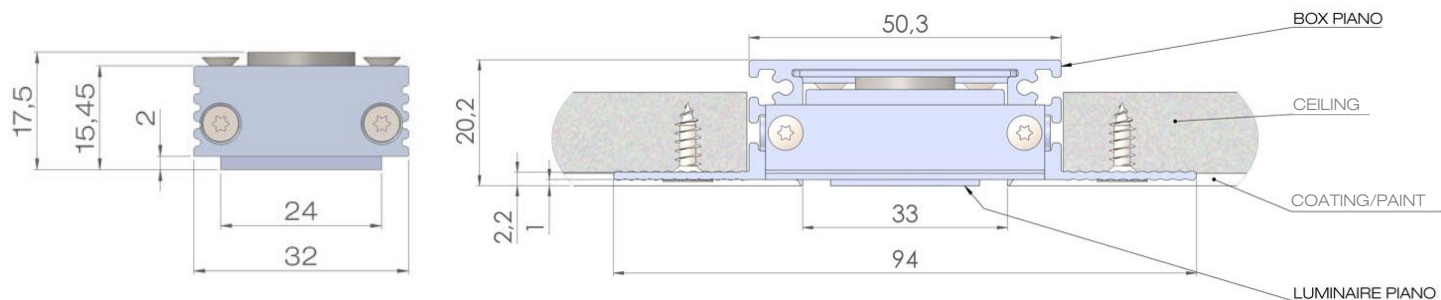

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

7/18

Louss

Last update : 2025/06/10 - R

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group



Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE





PIANO TRIMLESS SUR-MESURE

Dimensions & Installation guide

Installation in wood ceiling with metal plate and metal suspension slings

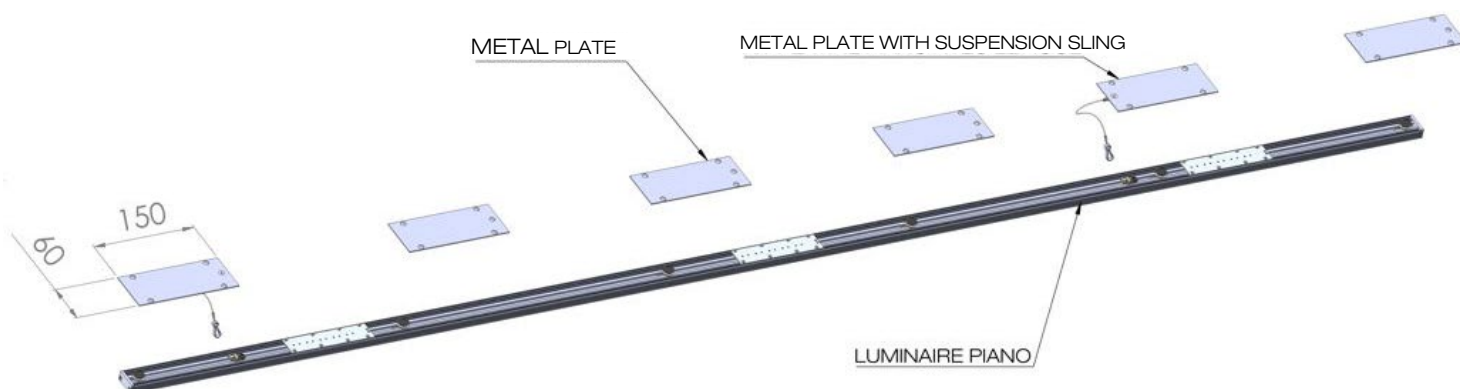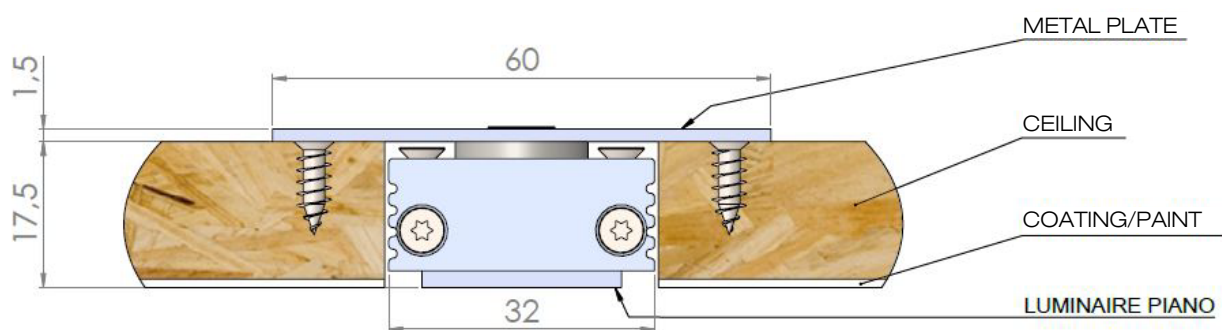

Metal plates details

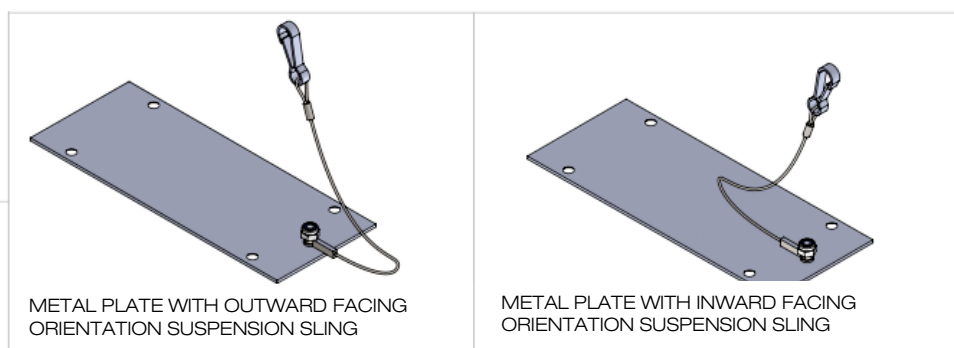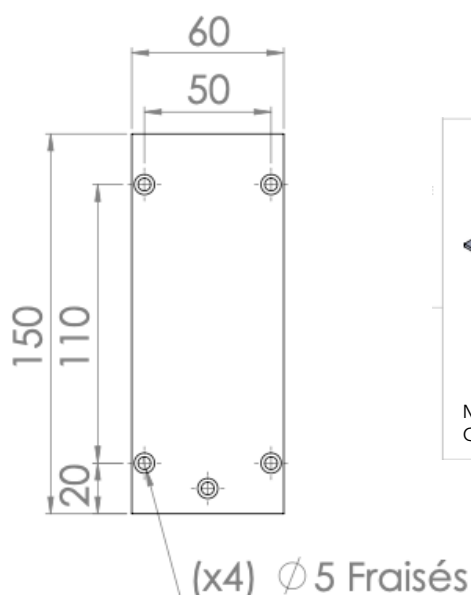

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

8/18

Louss

Last update : 2025/06/10 - R

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group


Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



PIANO TRIMLESS SUR-MESURE

Dimensions & Installation guide

Installation in wood ceiling with metal plate and metal suspension slings

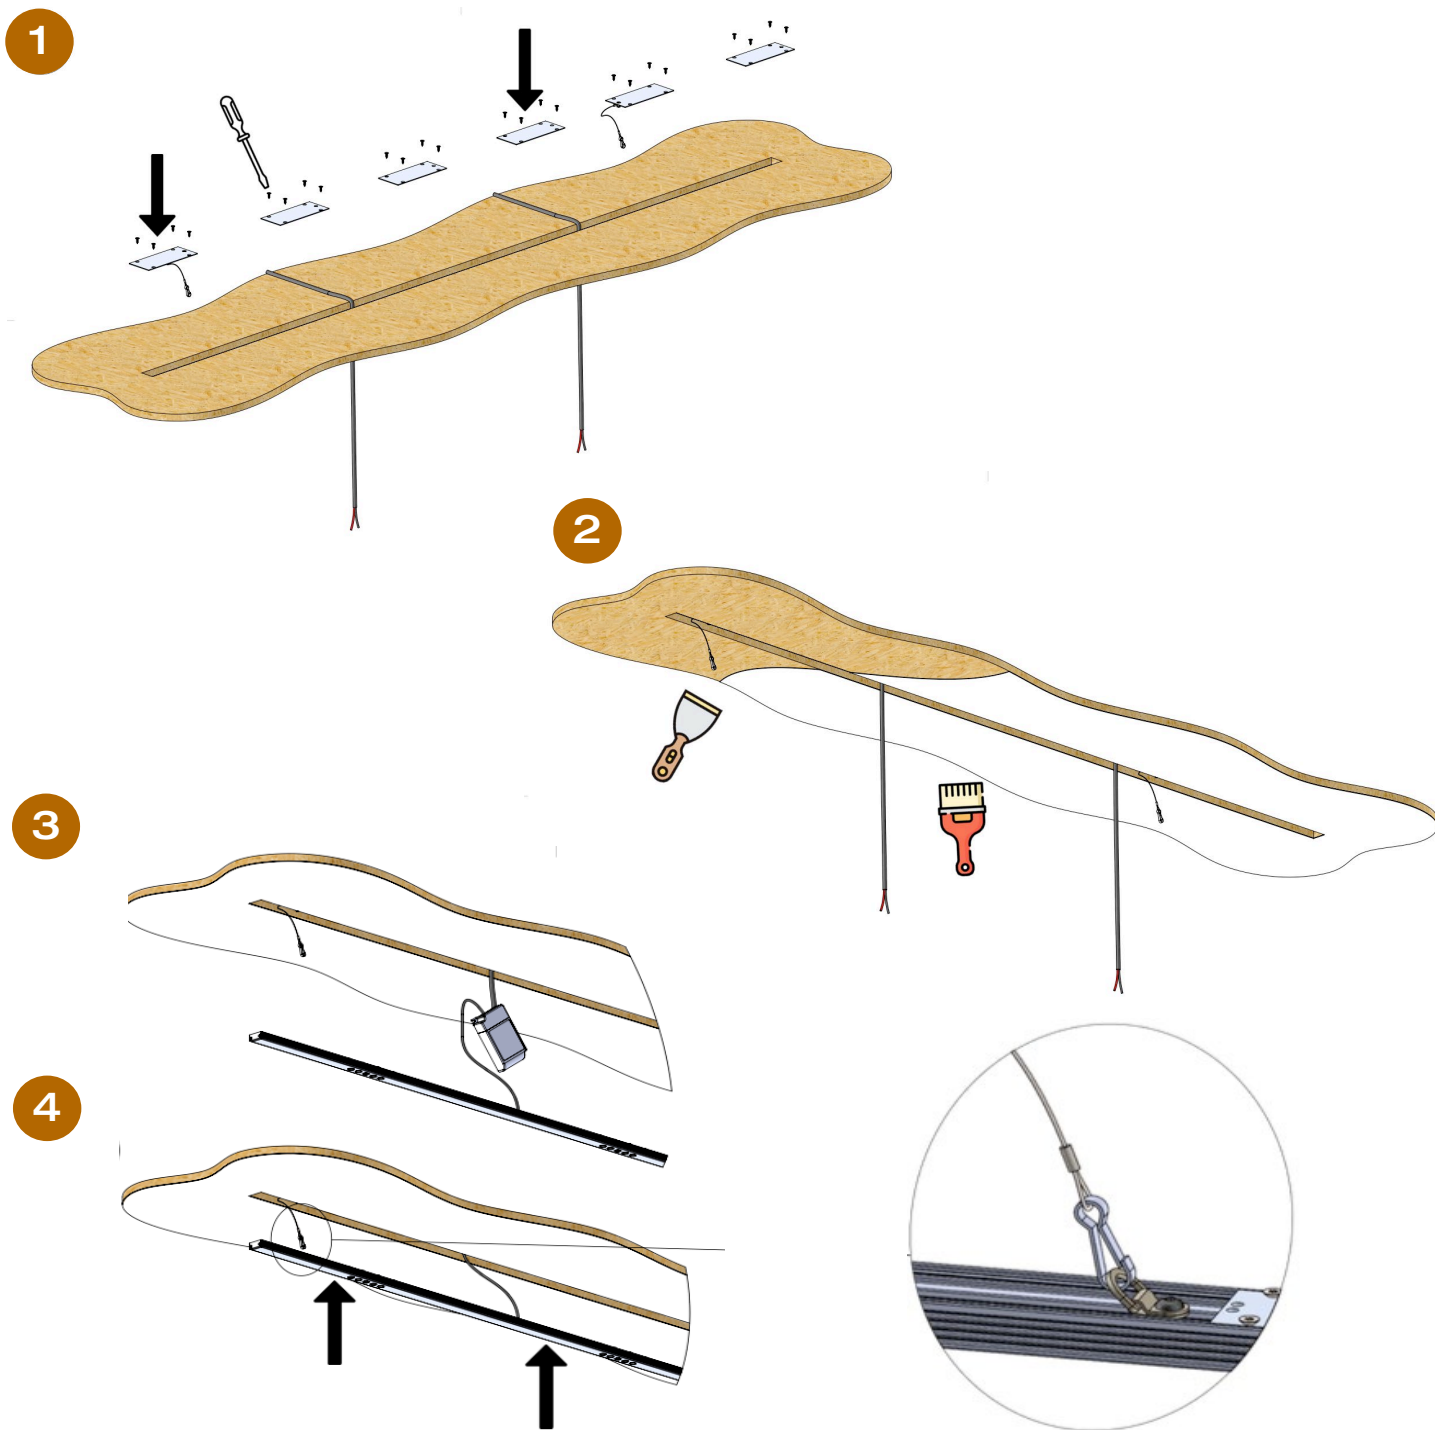

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

9/18

LOUSS


Last update : 2025/06/10 - R

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

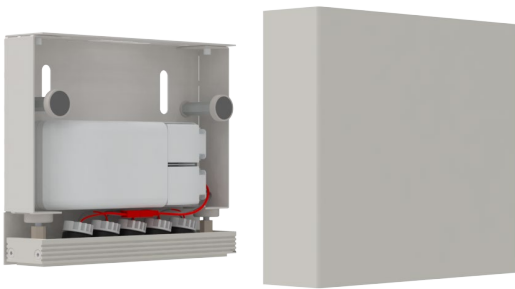

PIANO


Trimless Built-in Driver

Range	Decorative linear LED light low luminance for accent & ambient lighting
Description	Aluminum profile + driver box 152x36x130mm 2 fixing slots at the back + 2 fixing holes on top Cable exit on top Removable front cover Paint finish, according to requested RAL LEDs with black low luminance tubes: • Straight • Tilted 7° • Tilted 10° • Tilted 12°
LED characteristics	2700K – 3000K – 3500K – 4000K (other upon request) CRI 92 R9 > 80 3 SDCM
Optical beams	16° - 21° - 28° - 38° - 40° - 50° (UGR < 14) - 65
Connection	Supplied with 0.5m cable
Power supply	Built-in constant current driver 700mA max Optional: DALI driver
Power	10W
Electrical class	II
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span: L80-B10 = 35,000 hours (80% remaining flux) at 30°C ambient temperature The warranty applies to components and fabrication supplied by Louss The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and receive a functional burn-in




PIANO TRIMLESS DRIVER INTÉGRÉ

Dimensions & Installation guide

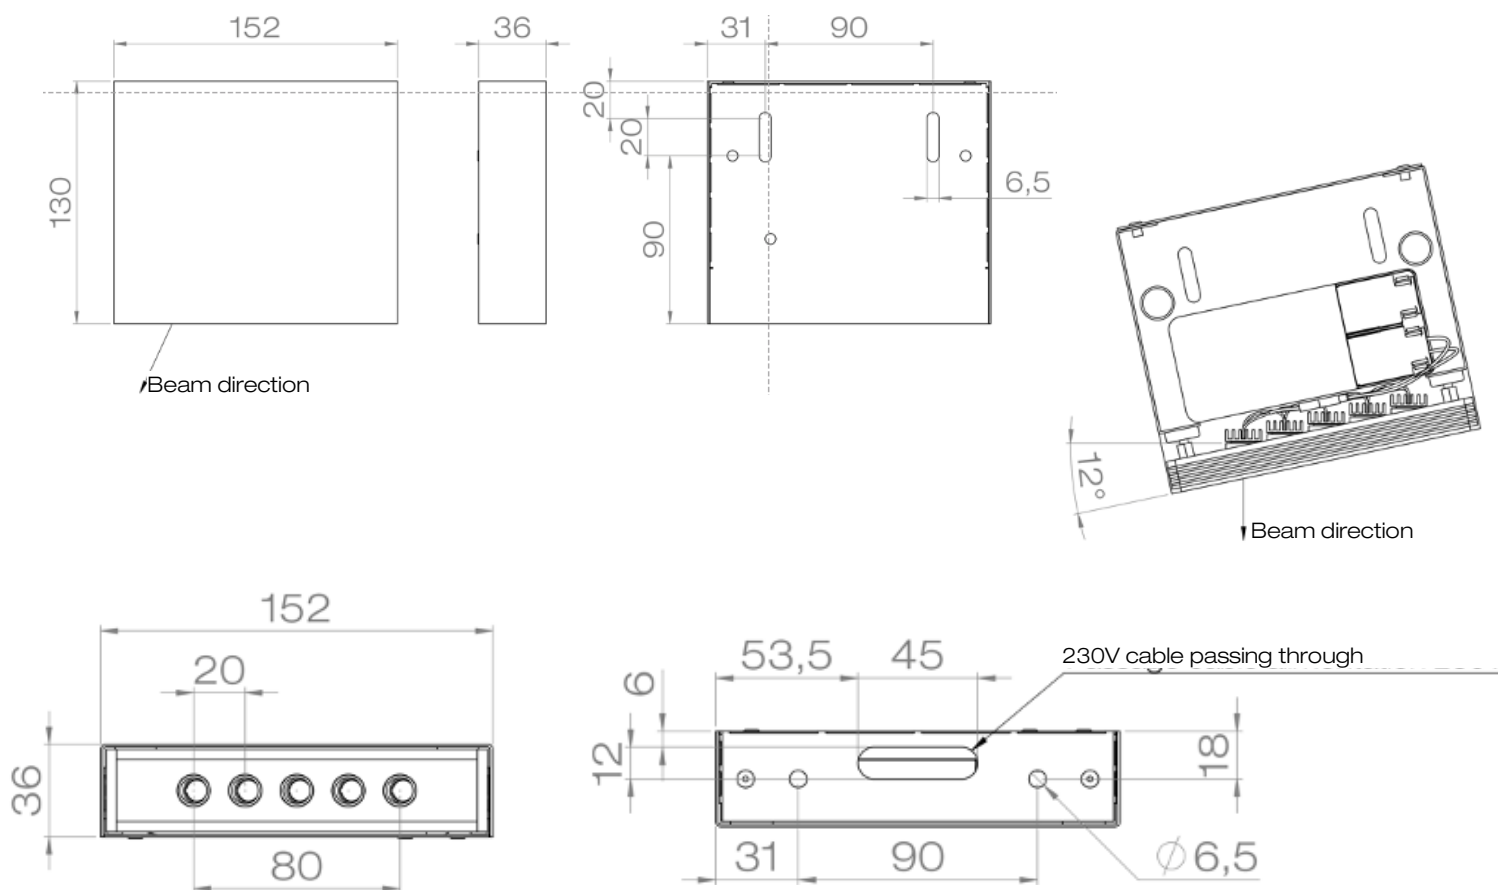

Installation guide

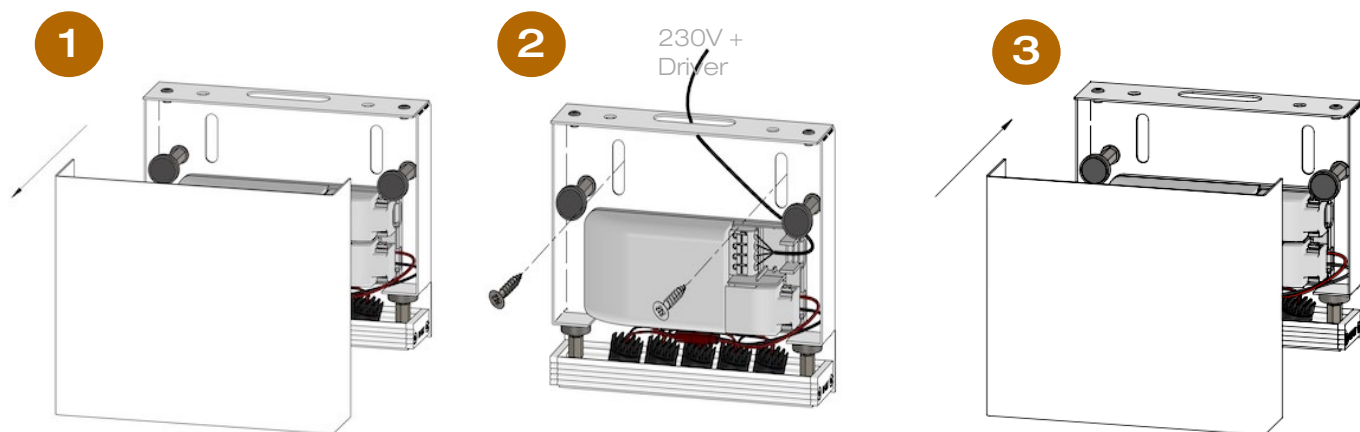

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

11/18

Louss



Last update : 2025/06/10 - R

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

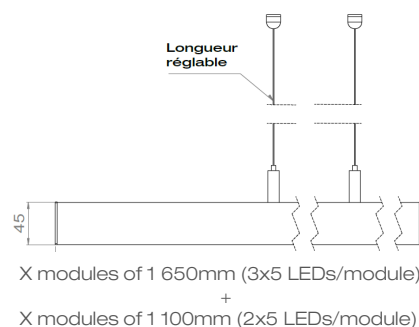

PIANO SUSPENSION

Gamme	LED chandelier
Description	Aluminum profile 40x45.5mm LEDs with black low luminance tubes: • Straight • Tilted 7° • Tilted 10° • Tilted 15° Length 1650mm : 3x5 LED Length 1100mm : 2x5 LED Paint finish according to requested RAL Suspended by steel adjustable rope
LED characteristics	2700K – 3000K – 3500K – 4000K (other upon request) CRI 92 R9 > 80 3 SDCM
Optical beams	16° - 21° - 28° - 38° - 40° - 50° (UGR < 14) - 65° - Elliptical 16°x40°
Connection	Connection with supplied transparent cable
Power supply	48V constant voltage remote power supply Optional: DALI driver
Power	10W per module of 5 LEDs
Electrical class	III
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use
Warranty	Life span: L80-B10 = 35,000 hours (80% remaining flux) at 30°C ambient temperature The warranty applies to components and fabrication supplied by Louss The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and receive a functional burn-in

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

12/18

LOuss



Last update : 2025/06/10 - R

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group



Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE

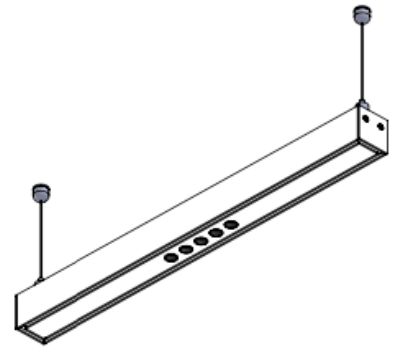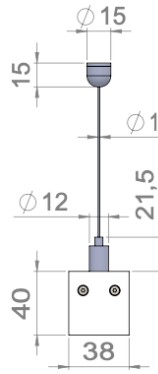

PIANO SUSPENSION SLIM / PIANO SUSPENSION SLIM TWIN

Range	LED chandelier	
Description	Aluminum profile : 38x40mm Lengths : 460mm - 830mm - 1200mm - 1630mm - 2370mm Paint finish according to requested RAL Suspended by steel adjustable rope	
LED characteristics	Direct lighting LED spotlights with low luminance black tubes: . Straight . Tilted 7° . Tilted 10° . Tilted 15° 2700K – 3000K – 3500K – 4000K (other upon request) CRI 92 R9 > 80 3 SDCM Length 460mm : 1 x 5 spots max Length 830mm : 2 x 5 spots max Length 1200mm : 2 x 5 spots max Length 1630mm : 2 x 5 spots max Length 2370mm : 4 x 5 spots max	Indirect lighting (Slim Twin version) LED engines 2700K – 3000K – 3500K – 4000K (other upon request) CRI 90 R9 > 50 / IRC 95 R9 > 80 3 SDCM Length 460mm : 1 x 410mm Length 830mm : 1 x 780mm Length 1200mm : 1 x 1150mm Length 1630mm : 2 x 780mm Length 2370mm : 2 x 1150mm
Optical beams	Indirect lighting (Slim & Slim Twin versions) 16° - 21° - 28° - 38° - 40° - 50° (UGR < 14) 65° - Elliptical 16°x40°	Indirect lighting(Slim Twin version) 40° - 60° - 90° - Batwing – Asymmetrical - Double asymmetrical
Connection	Connection with supplied transparent cable	
Power supply	Slim & Slim Twin versions with simultaneous direct/indirect lighting 48V constant voltage driver Supplied with 2-conductors transparent cable	Slim Twin with differentiated direct & indirect lightings Direct lighting: Constant current driver 700mA max Indirect lighting: 48V constant voltage driver Supplied with 4-conductors transparent cable

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

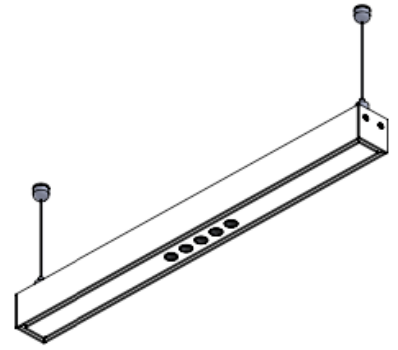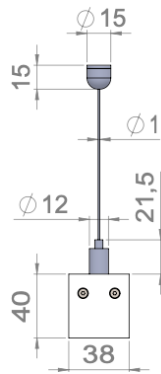

PIANO SUSPENSION SLIM / PIANO SUSPENSION SLIM TWIN

Power	Direct Lighting Length 460mm : 10W max Length 830mm : 20W max Length 1200mm : 20W max Length 1630mm : 20W max Length 2370mm : 40W max	Indirect Lighting Length 460mm : 6W max Length 830mm : 11W max Length 1200mm : 17W max Length 1630mm : 22W max Length 2370mm : 34W max
Electrical class	III	
Use limitations	The product must be installed into a ventilated area Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees The drivers, if not delivered by LOuss, must be approved before use	
Warranty	Life span: L80-B10 = 35,000 hours (80% remaining flux) at 30°C ambient temperature The warranty applies to components and fabrication supplied by Louss The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product All products are electrically tested and receive a functional burn-in	

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

LOuss

Last update : 2025/06/10 - R

14/18

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




PIANO SUSPENSION SLIM / SLIM TWIN

Length details 460mm

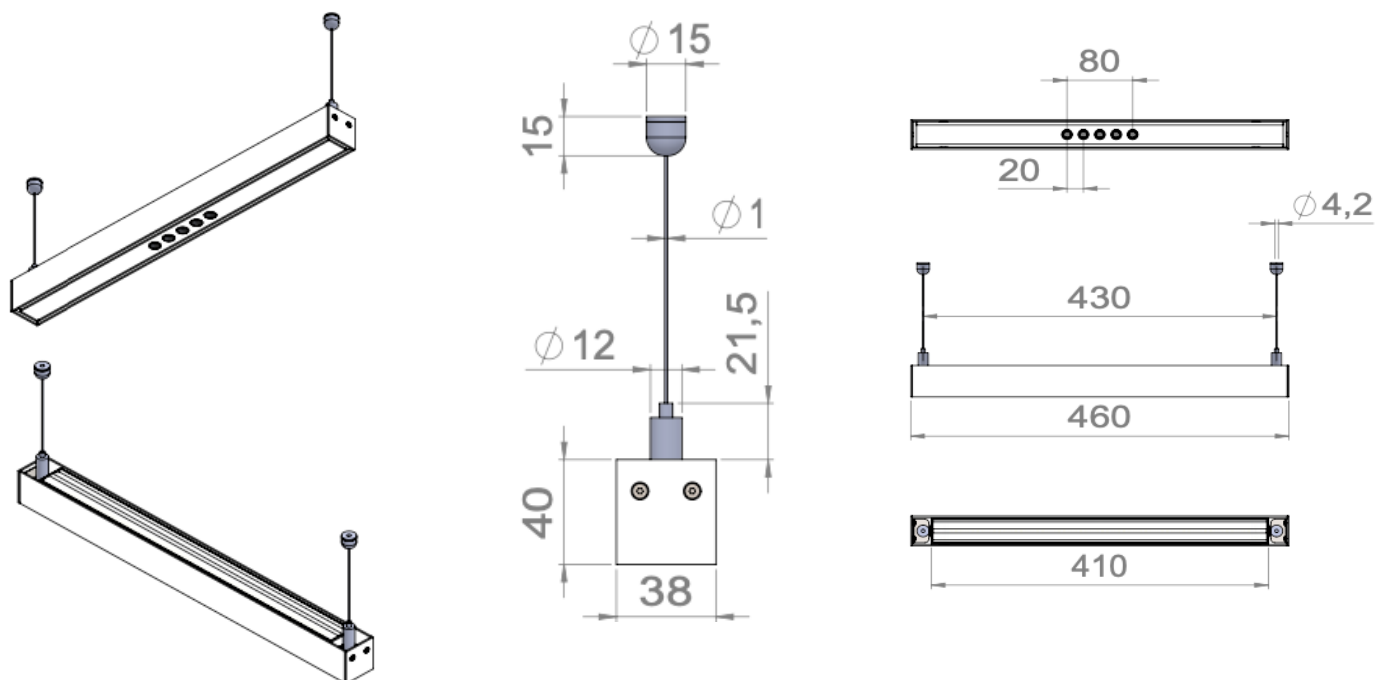

PIANO SUSPENSION SLIM / SLIM TWIN

Length details 830mm

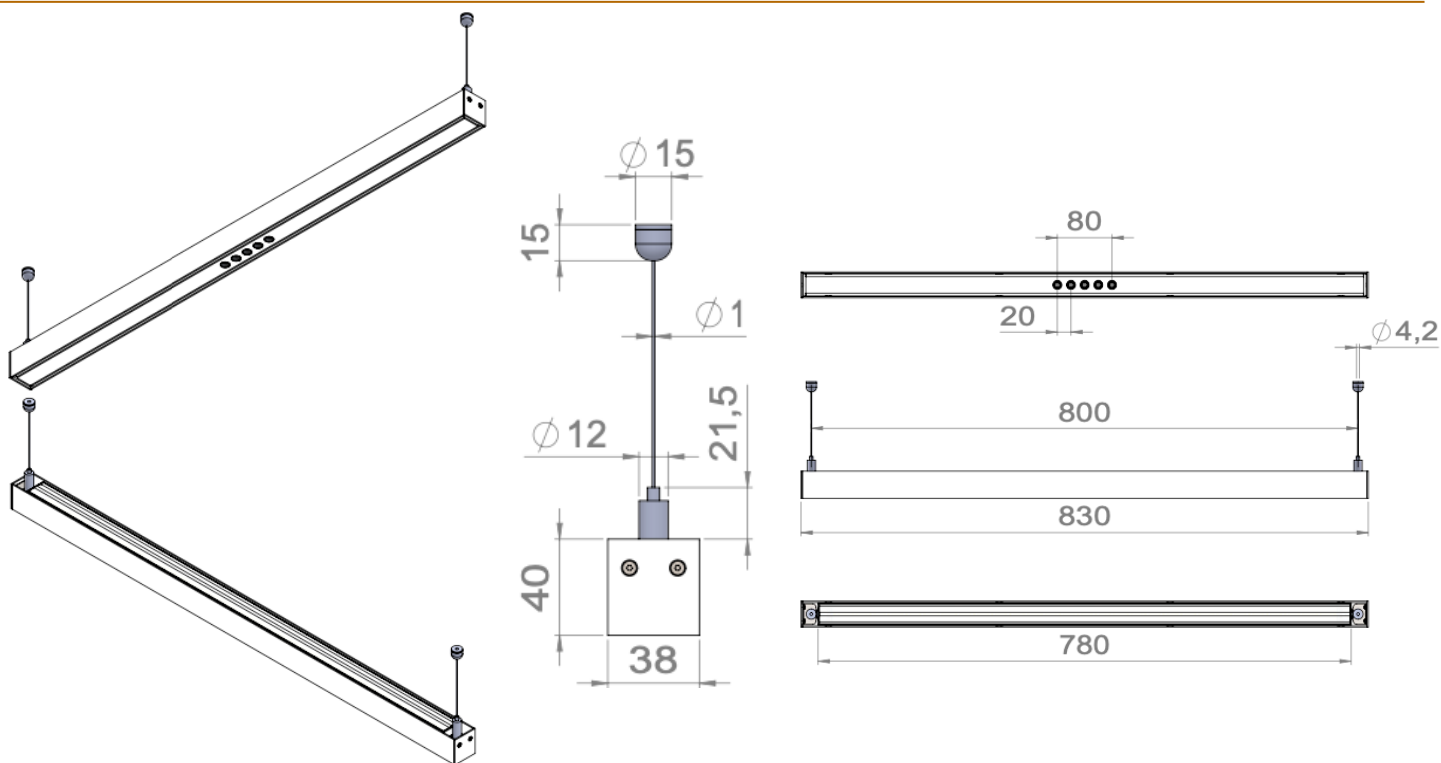

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

15/18

LOUSS

Last update : 2025/06/10 - R

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



PIANO SUSPENSION SLIM / SLIM TWIN

Length details 1200mm

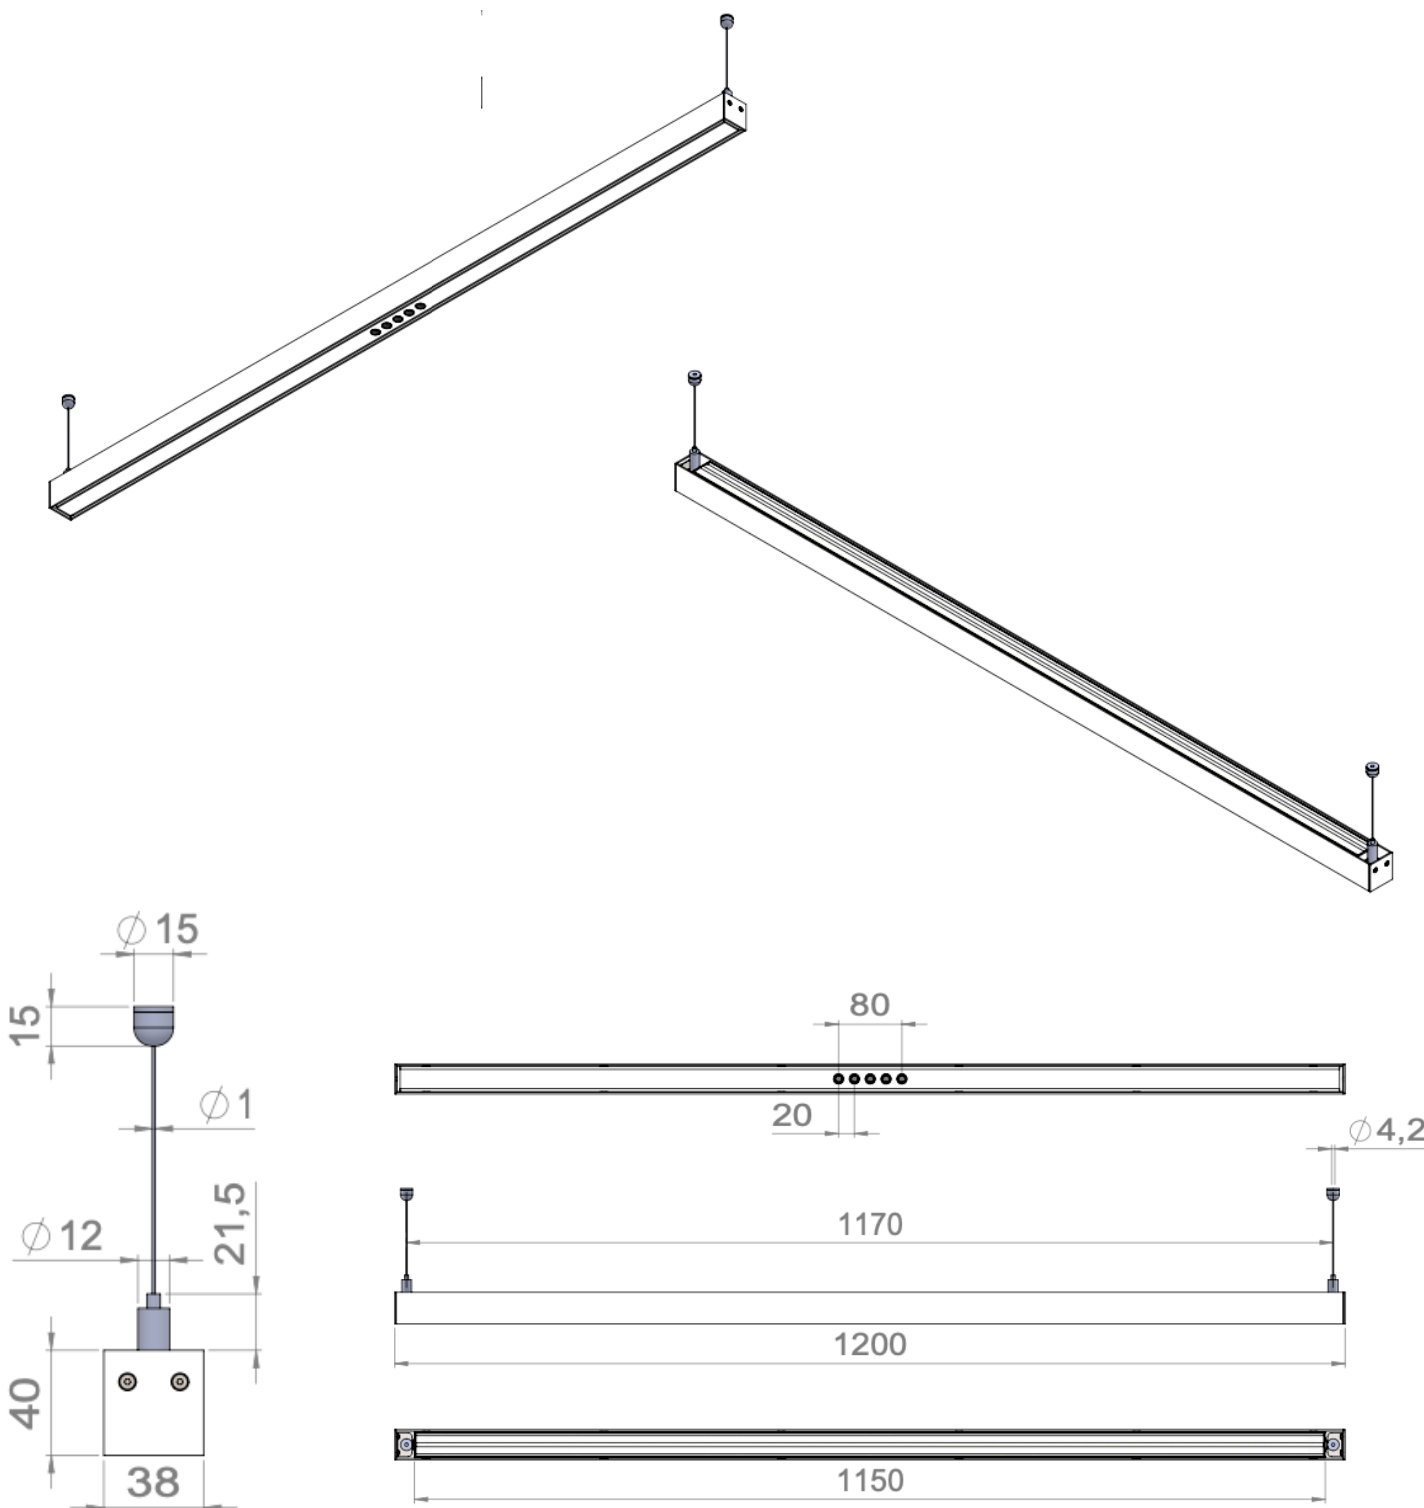

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

16/18

Louss

Last update : 2025/06/10 - R

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



PIANO SUSPENSION SLIM / SLIM TWIN

Length details 1630mm

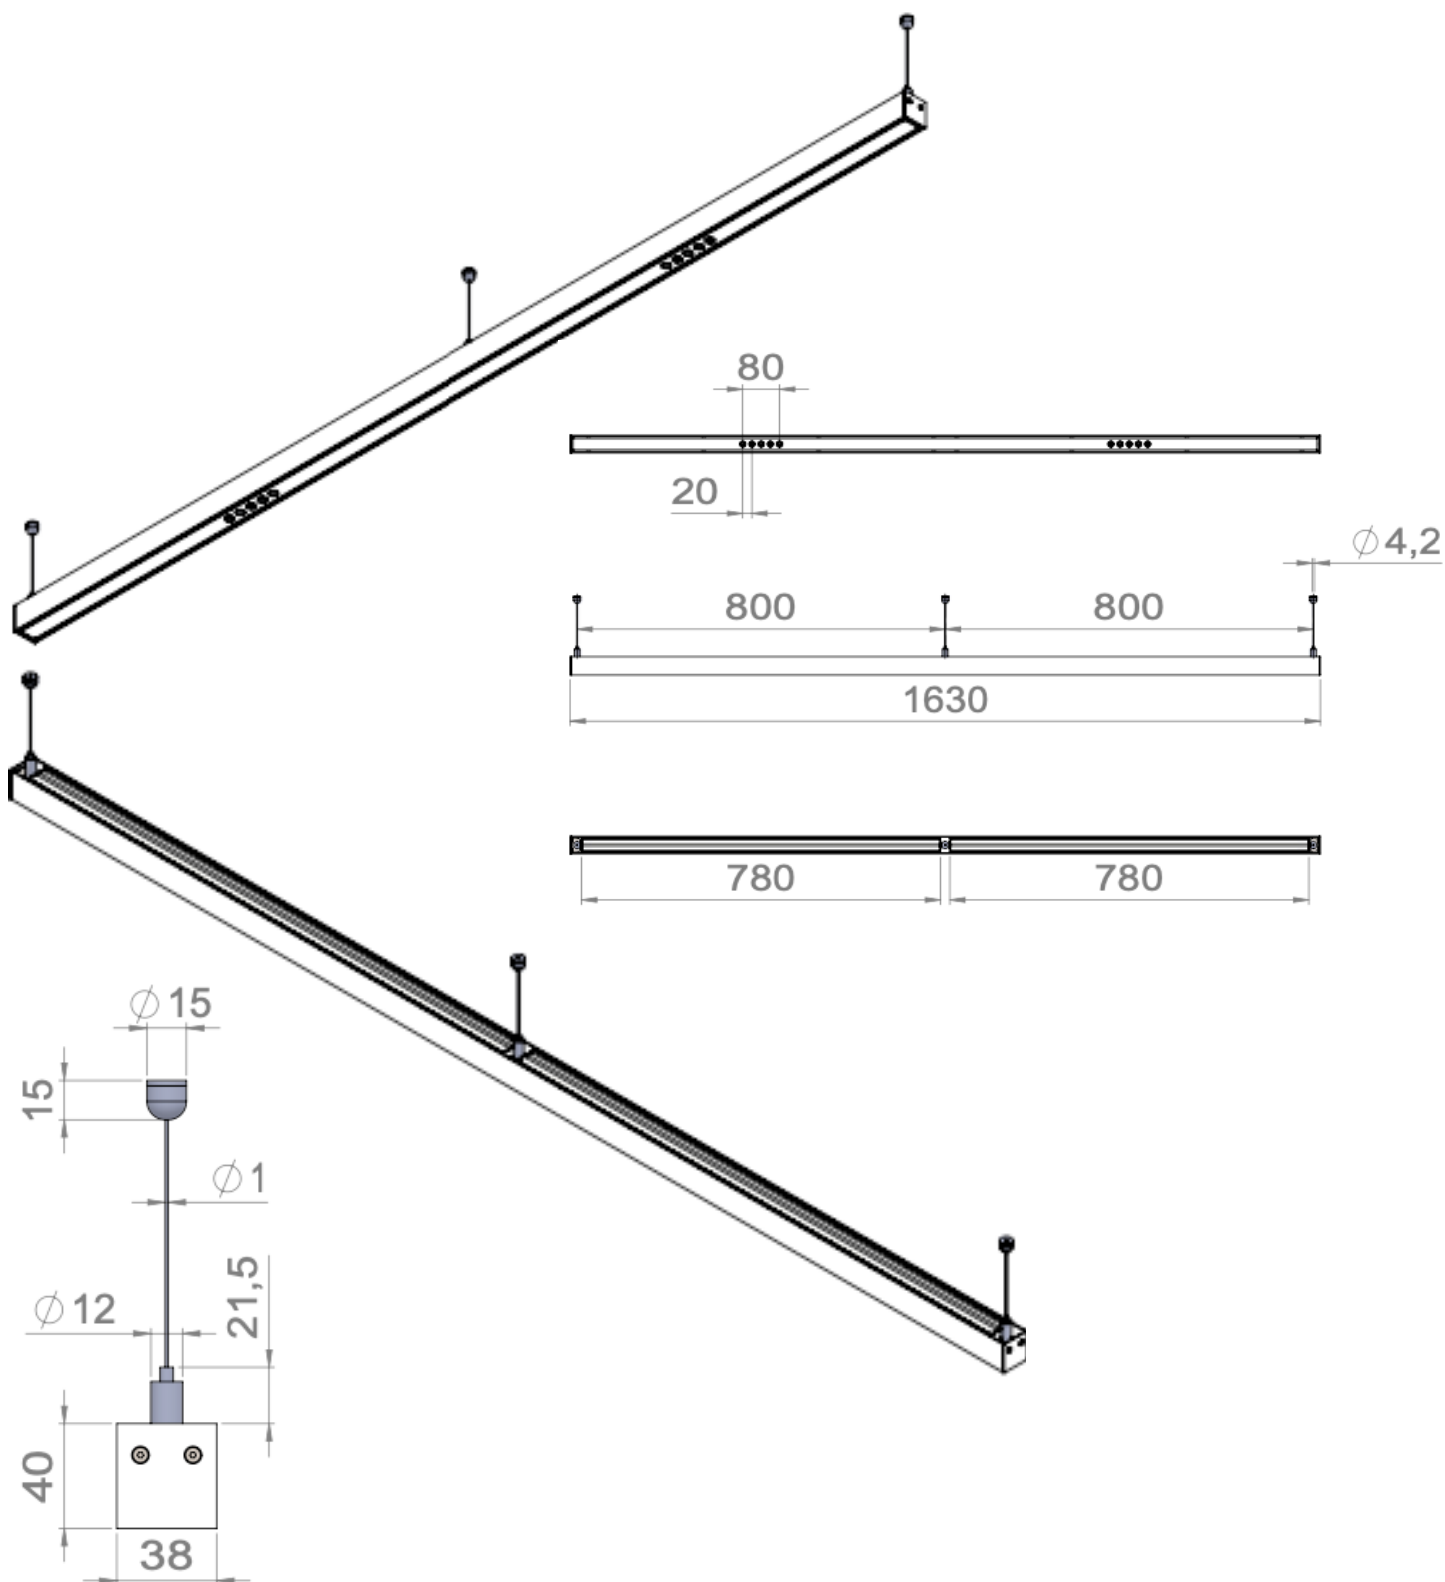

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

17/18

Wouss

Last update : 2025/06/10 - R

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



PIANO SUSPENSION SLIM / SLIM TWIN

Length details 2370mm

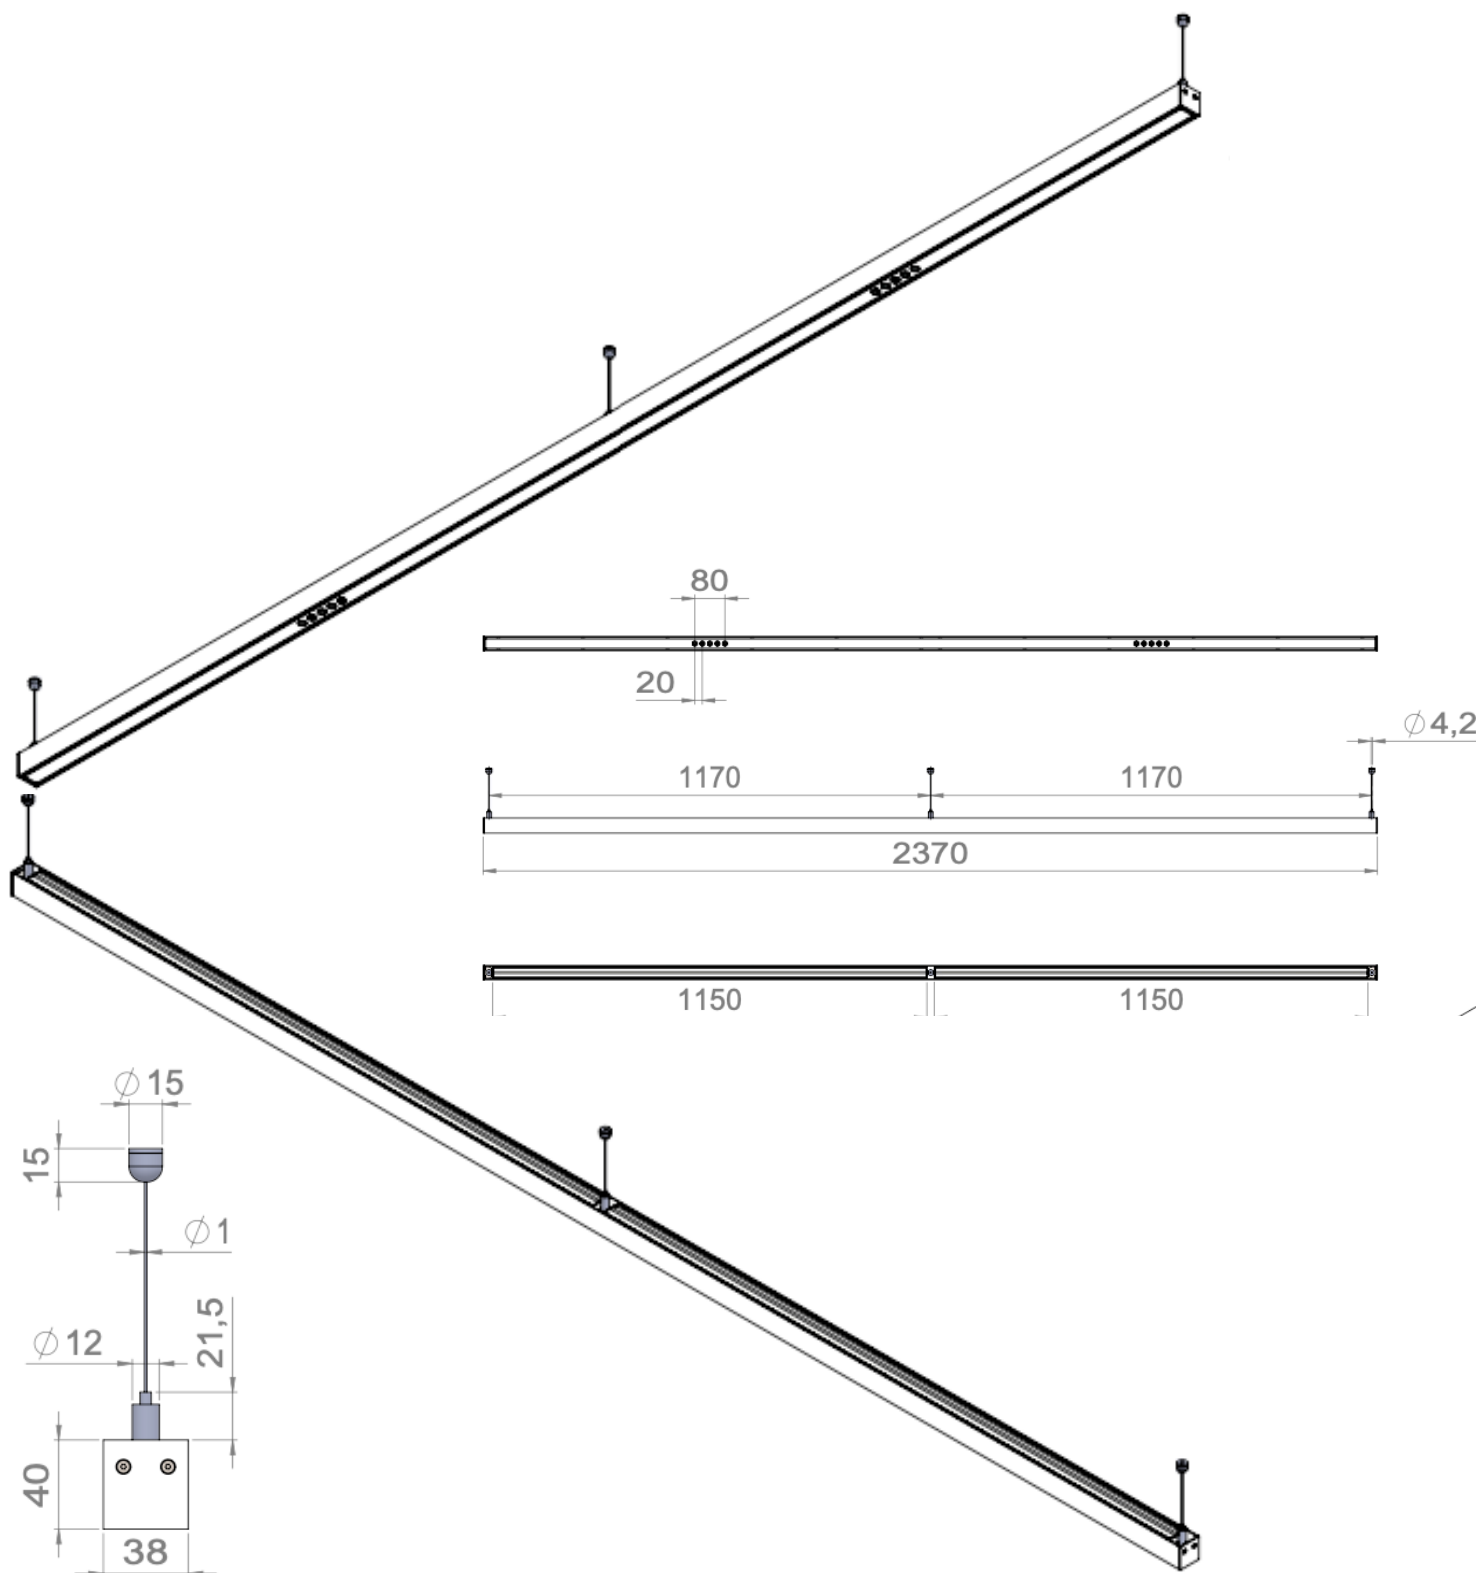

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

18/18

LOUSS

Last update : 2025/06/10 - R

Firalux & LOUSS brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE