


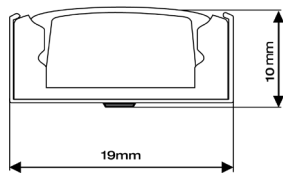


**SL7**

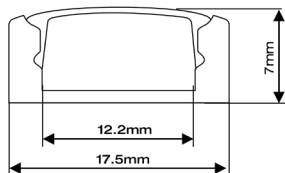



Fixing clip

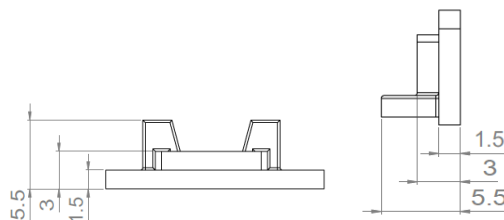

End cap

## SL7

|              |                  |
|--------------|------------------|
| <b>Range</b> | Linear LED light |
|--------------|------------------|

|                    |  |
|--------------------|--|
| <b>Description</b> | SL7 natural anodized aluminium profile + LED strip or PCB LED + opal or clear diffuser + 2 natural aluminium end caps + fixing clips |
|--------------------|--|

|                   |   |
|-------------------|---|
| <b>Dimensions</b> | Width : 19mm – Height : 10mm, with fixing clips<br>Length upon request up to 3m |
|-------------------|---|

| LED strip      | Colour temperature                    | LED power W/m |       |       | CRI     | Cut-out size mm | LED /m | IP           |
|----------------|---------------------------------------|---------------|-------|-------|---------|-----------------|--------|--------------|
|                |                                       |               |       |       |         |                 |        |              |
| FIRALED 160    | 2700K – 3000K<br>3500K – 4000K        | 10.40         | 15.50 | 18    | 90      | 50              | 160    | IP20         |
| FIRASLIM 60    | 2700K – 3000K<br>4000K                | 13.45         |       |       | 90      | 100             | 60     | IP20         |
| FIRASLIM 120CC | 2700K - 3000K<br>3000K+3500K<br>4000K | 9.60          | 14.40 | 19.20 | 90      | 50              | 120    | IP20         |
| FIRASTRIP 72   | 2700K – 3000K<br>4000K                | 15.80         |       |       | 80 - 90 | 83.3            | 72     | IP20<br>IP65 |
| FIRASTRIP 96   | 2700K – 3000K<br>3500K – 4000K        | 21.10         |       |       | 80      | 62.50           | 96     | IP20<br>IP65 |
| C35-127        | 3500K                                 | 12.70         |       |       | > = 80  | 62.5            | 128    | IP20         |
| CRGB           | RGB                                   | 14.40         |       |       |         | 100             | 60     | IP20         |
| SIMPLE M       | 2700K – 3000K<br>4000K                | 9.60          | 14.40 |       | 80 - 90 | 50              | 120    | IP20<br>IP65 |
| TRICHIP        | 2700K – 3000K<br>4000K                | 7.20          | 14.40 |       | 80      | 100             | 80     | IP20<br>IP65 |

| LED PCB | Colour temperature             | LED power W/m |       |       | CRI     | Cut-out size mm | LED/ m | IP   |
|---------|--------------------------------|---------------|-------|-------|---------|-----------------|--------|------|
|         |                                |               |       |       |         |                 |        |      |
|         | 2700K - 3000K<br>3000K - 4000K | 9.60          | 14.40 | 19.20 | 90 - 95 | 100             | 120    | IP65 |

|                              |                      |
|------------------------------|----------------------|
| <b>Separate power supply</b> | 24V constant voltage |
|------------------------------|----------------------|

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

LOUSS



Last update : 22/02/22

Firalux & LOUSS brands



SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best group

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE

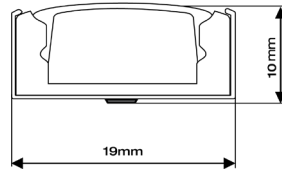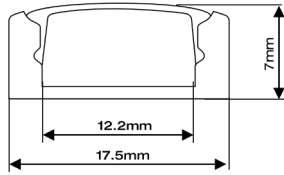

Fixing clip

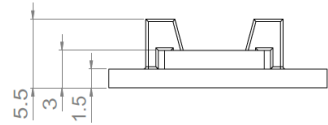

End cap

## SL7

|                               |   |
|-------------------------------|---|
| <p><b>Connection</b></p>      | <p>LED strip : 5m maximum in series<br/>         LED PCB : 9.6W : 7m maximum in series<br/>         14.4W : 5m maximum in series<br/>         19.2W : 3.50m maximum in series</p>   |
| <p><b>Use limitations</b></p> | <p>The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (<math>T_a</math>) would lead to a more rapid mortality of the product and the withdrawal of our guarantees.<br/>         The drivers, if not delivered by LOuss, must be approved before use.</p>   |
| <p><b>Warranty</b></p>        | <p>Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature.<br/>         3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product.<br/>         All products are electrically tested and received a functional burn-in.</p> |

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

LOuss

Last update : 22/02/22

Firalux & LOuss brands

SARL, Capital 40 000€  
 RCS DIJON B 503 367 245  
 TVA/VAT n°: FR24 503 367 245  
 APE 4676Z

Tel. : +33 380 48 65 68  
 contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
 Best group

Siège social / Head Office  
 PA Les Terres d'Or  
 Route de Saint Philibert  
 21220 Gevrey Chambertin - FRANCE