





XS 0809

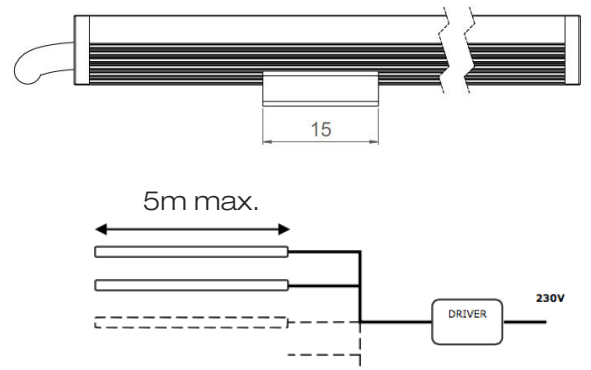

Fixing clips (2/meter)



XS 0809

Range	Linear LED light			
Description	Natural anodized aluminium profile + opal diffuser + 2 fixing clips/m + 2 end caps			
Dimensions	Width : 9.5mm – Height : 11.7mm, with fixing clips Length upon request any 2500mm max			
LED strip	Colour temperature	LED power W/m	CRI	Cut-out size mm
FIRASLIM 60	2700K – 3000K - 4000K	13.45	90	100
FIRASLIM 120CC	2700K - 3000K 3000K+3500K - 4000K	9.6	90	50
FIRASLIM 120CC	2700K - 3000K 3500K - 4000K	14.4	90	50
FIRASLIM 120CC	2700K – 3000K – 4000K	19.2	90	50
Separate power supply	24V			
Connection	5m maximum per driver's output			
Use limitations	<p>The product must be installed into a ventilated area.</p> <p>Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees.</p> <p>The drivers, if not delivered by LOuss, must be approved before use.</p>			
Warranty	<p>Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty.</p> <p>The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product.</p> <p>All products are electrically tested and received a functional burn-in.</p>			

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

LOuss

Last update : 24.01.2022

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE