




XS MICRO



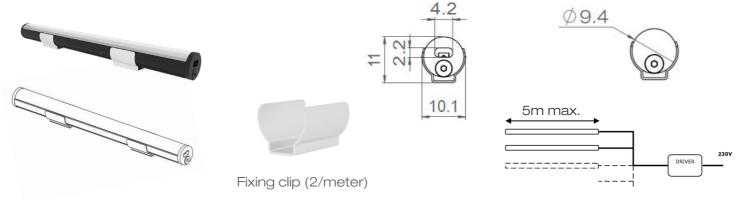

XS MICRO

Range	Linear LED light
Description	Natural anodized aluminium profile + clear or opal diffuser + 2 fixing clips/m + 2 end caps
Dimensions	Width : 10.50mm – Height : 11mm, with fixing clips Length upon request any 2500mm max

LED Strip	Colour temperature	LED power W/m	CRI	Cut-out size mm
FIRASLIM 60	2700K – 3000K - 4000K	13.45	90	100
FIRASLIM 120CC	2700K - 3000K 3000K+3500K - 4000K	9.6	90	50
FIRASLIM 120CC	2700K - 3000K 3500K - 4000K	14.4	90	50
FIRASLIM 120CC	2700K – 3000K – 4000K	19.2	90	50

Separate power supply	24V

Connection	5m maximum per driver's output		
Use limitations	The product must be installed into a ventilated area.		
	Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees.		
	The drivers, if not delivered by LOuss, must be approved before use.		
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty.		
	The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product.		
	All products are electrically tested and received a functional burn-in.		

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.



Last update : 20.01.2022

Firalux & LOuss brands

SARL, Capital 40 000€ RCS DIJON B 503 367 245 TVA/VAT n°: FR24 503 367 245 APE 4676Z Tel. : +33 380 48 65 68 contact@louss.fr

www.louss.fr

Best group

Siège social / Head Office PA Les Terres d'Or Route de Saint Philibert 21220 Gevrey Chambertin - FRANCE